

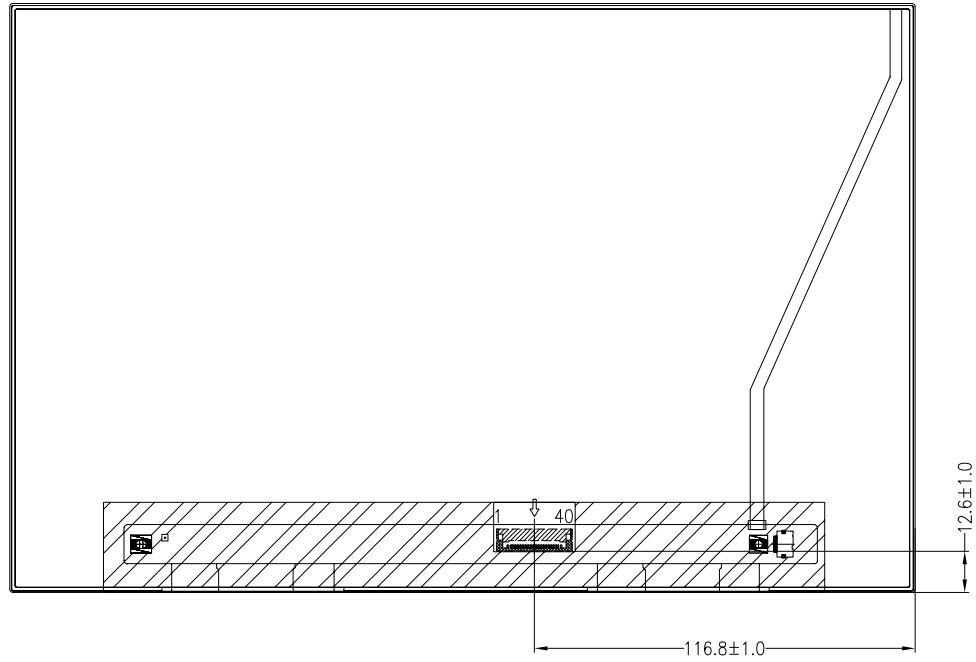


PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	VDD
3	VDD
4	VDD
5	NC
6	GND
7	GND
8	RXIND-
9	RXIND+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	LVDS_CLK-
18	LVDS_CLK+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	GND
29	NC
30	NC
31	GND
32	GND
33	GND
34	NC
35	PWM
36	LED_EN
37	NC
38	VLED
39	VLED
40	VLED

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: TBD
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 48-CHIP WHITE LED  
BUILT-IN BACKLIGHT DRIVER: VLED=35V
8. SURFACE LUMINANCE: 1000CD/M<sup>2</sup> (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. CONNECTOR: MSAK24025P40G OR EQUIVALENT
11. GENERAL TOLERANCE: ±0.5MM
12. ROHS COMPLIANT

 <b>MULTI-INNO TECHNOLOGY CO., LTD.</b>		DRAWN BY: CAROL 2022.09.15		MODULE P/N: MI1210ZT-2
		CHECKED BY:	SCALE : 1/1	DESCRIPTION:
VER. 01	FIRST ISSUE	CAROL 2022.09.15	APPROVED BY:	UNIT: mm
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO: 01
			SHEET NO.: 1/2	TFT MODULE



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.09.15		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1210ZT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2022.09.15
VER.	REVISED DESCRIPTION	REVISER	DATE