

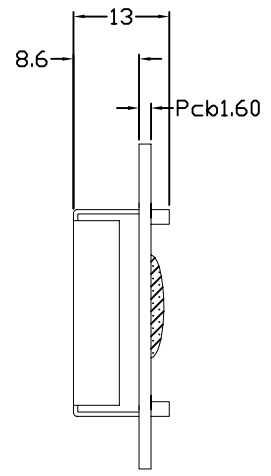


PIN ASSIGNMENT	
NO.	SYMBOL
1	VDD
2	VSS
3	VO
4	RST
5	E1
6	E2
7	RW
8	AO
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	LEDA
18	LEDK

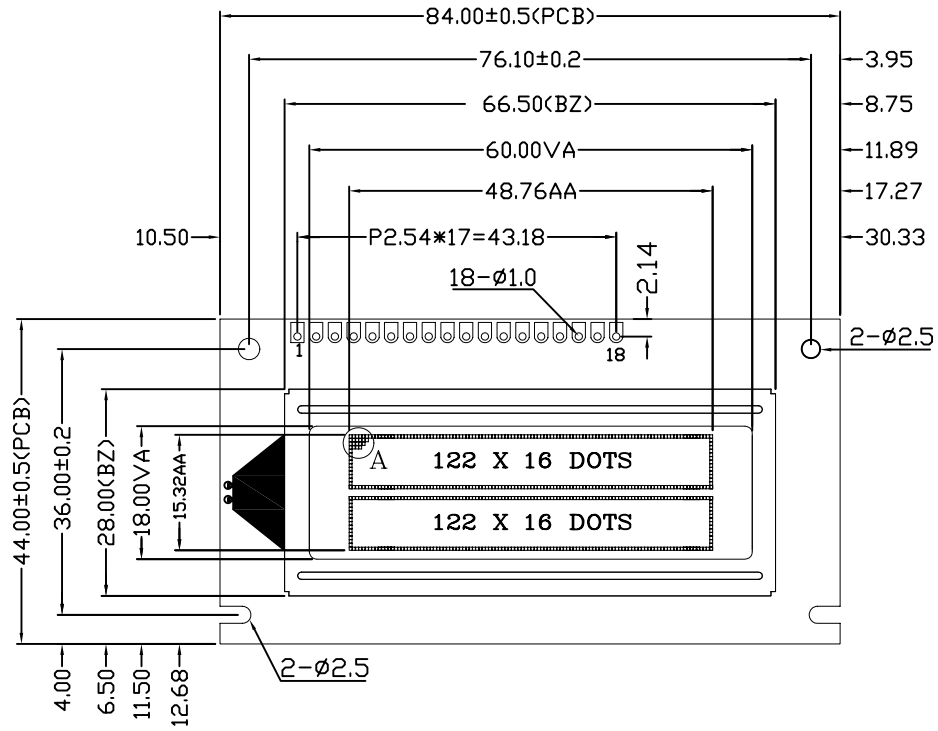

Detail "A"

- NOTES:
1. DISPLAY TYPE: STN (YELLOW-GREEN), TRANSFLECTIVE, POSITIVE.
 2. VIEWING DIRECTION: 6 O'CLOCK.
 3. DRIVE METHOD: 1/32DUTY, 1/5BIAS.
 4. OPERATING VOLTAGE: VDD=5.0V, VOP=4.7V.
 5. IC DRIVER: AIP31520.
 6. OPERATING TEMP.: -20°~70°.
 7. STORAGE TEMP.: -30°~80°.
 8. GENERAL TOLERANCE: ±0.2MM.
 9. ROHS COMPLIANT.

MIT MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	20190111	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	MI12232L
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	01			GRAPHIC MODULE

VER.	FIRST ISSUE	REVISER	DATE
01		RITA	2019.01.11
	REVISED DESCRIPTION		