
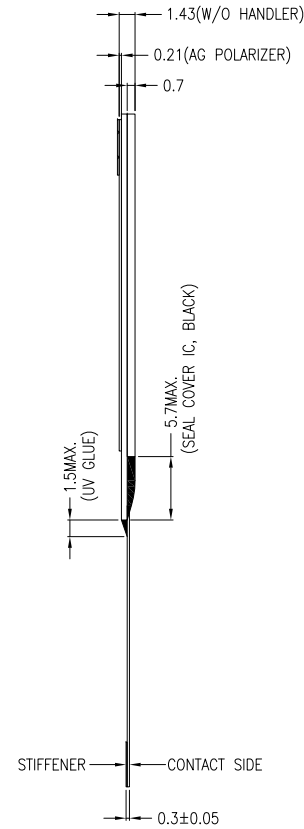
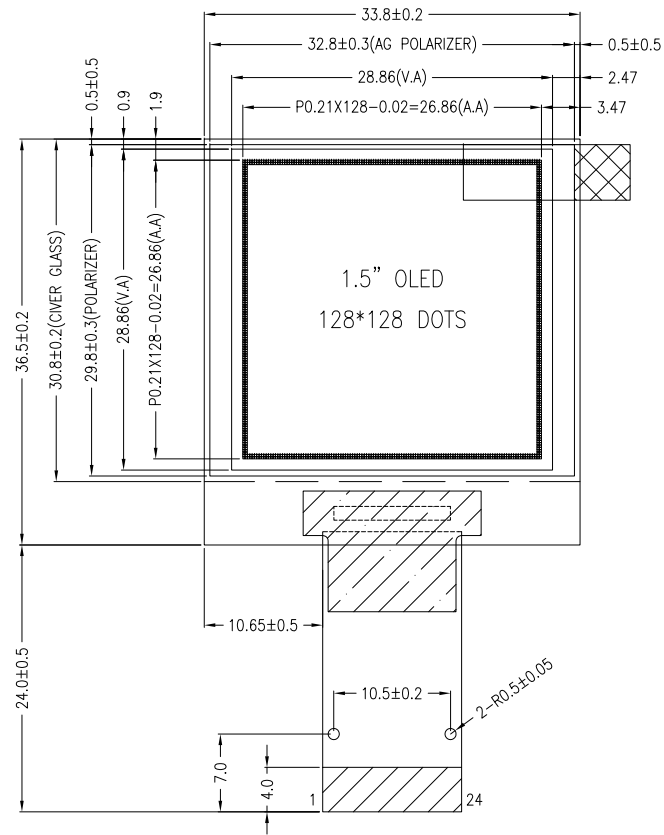



SCALE 20:1

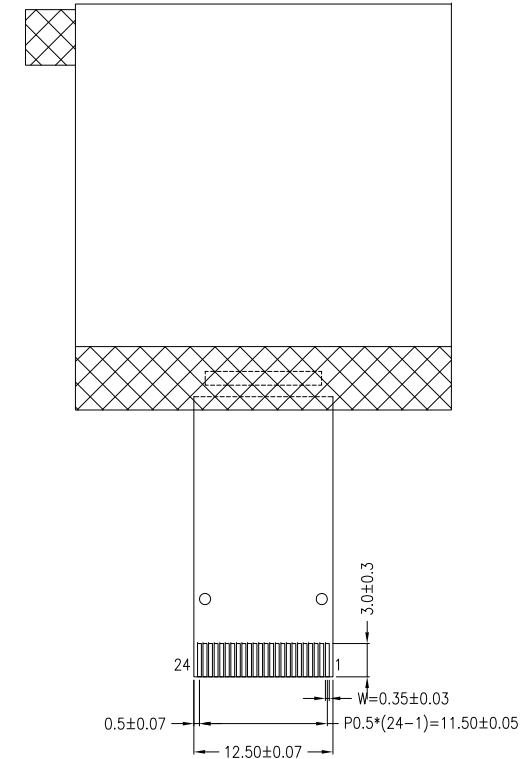

PIN DESCRIPTION	
PIN	SYMBOL
1	VSS
2	VCC
3	VCOMH
4	VCI
5	VDD
6	BS1
7	BS2
8	VSS
9	IREF
10	CS#
11	RES#
12	D/C
13	W/R#
14	RD#
15	D0
16	D1
17	D2
18	D3
19	D4
20	D5
21	D6
22	D7
23	VCC
24	VSS

NOTES:

- COLOR: YELLOW
- OPERATING VOLTAGE: VCI=3.0V (TYP.)
- DRIVE DUTY: 1/128
- DRIVER IC: SSD1327Z
- OPERATING TEMP.: -40°C ~ 70°C
- STORAGE TEMP.: -40°C ~ 85°C
- INTERFACE: 8-BIT 8080 PARALLEL, 4-WIRE SPI, IIC
- GENERAL TOLERANCE: ±0.3MM
- ROHS COMPLIANT

01	FIRST ISSUE	CAROL	2023.12.28	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	01	SHEET NO.: 1/1	OLED MODULE



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.12.28	MODULE P/N:	MI128128K0-Y
CHECKED BY:			SCALE : 1/1	
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE