
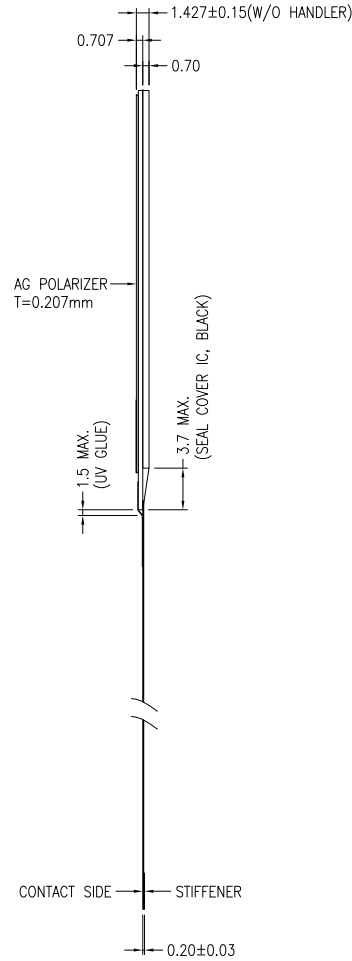
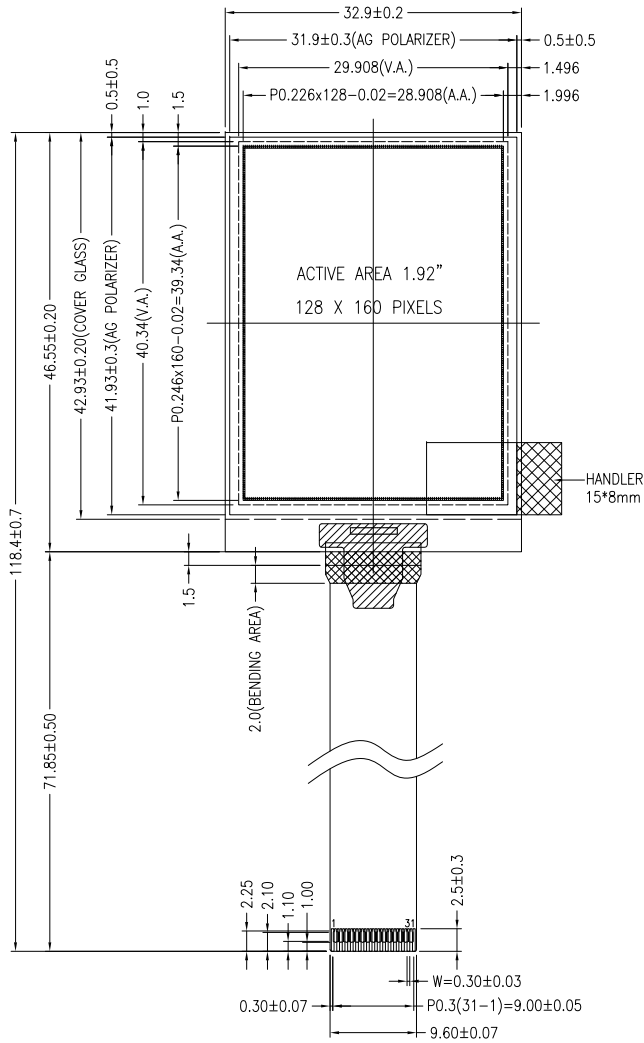


NOTES:

1. COLOR: WHITE
2. DRIVE DUTY: 1/128
3. DRIVER IC: SH1108
4. OPERATING TEMP.: -40°C ~ 70°C
5. STORAGE TEMP.: -40°C ~ 85°C
6. INTERFACE: 8-BIT 68XX/80XX PARALLEL, 3-/4-WIRE SPI, IIC
7. GENERAL TOLERANCE: ±0.5MM
8. ROHS COMPLIANT

PIN DESCRIPTION	
PIN	SYMBOL
1	NC
2	VPP
3	VSEGM
4	VCOMH
5	VSL
6	NC
7	IREF
8	VPP
9	NC
10	VSS
11	VCL
12	VDD
13	IM0
14	IM1
15	VDD
16	IM2
17	/CS
18	/RES
19	A0
20	/WR
21	/RD
22	D0
23	D1
24	D2
25	D3
26	D4
27	D5
28	D6
29	D7
30	NC
31	VPP

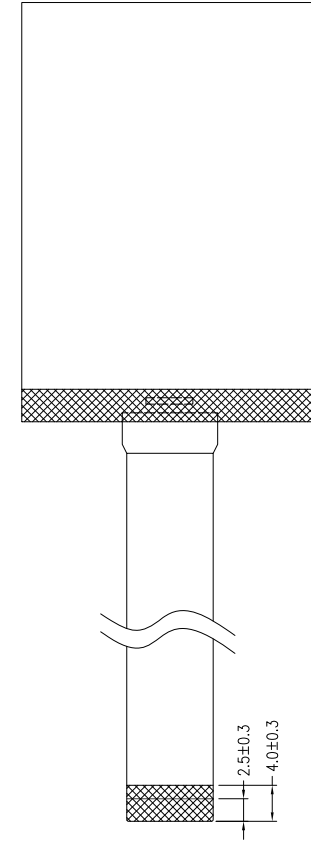

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.07.15		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI128160AO-W1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE

01	FIRST ISSUE	CAROL	2023.07.15
VER.	REVISED DESCRIPTION	REVISER	DATE