


NO.	SYMBOL
1	A-
2	B-
3	GND
4	CS
5	RES
6	CD
7	SCK
8	SDI
9	VDD
10	VSS
11	VBO+
12	VBO-
13	VB1-
14	VB1+
15	VLCD
16	GND
17	A
18	K
19	B+
20	A+

FUNCTION TABLE:

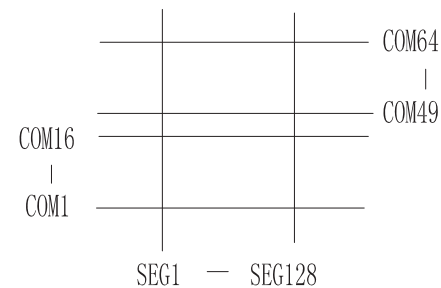

NOTES:

1. DISPLAY TYPE:FSTN, TRANSFLECTIVE/ POSITIVE.
2. DRIVE METHOD: 1/33DUTY, 1/6BIAS, VDD=3.3V, VOP=8.0V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: UC1701X.
5. OPERATING TEMP: -20°~70°.
6. STORAGE TEMP: -30°~80°.
7. BACKLIGHT TYPE: 4-CHIP WHITE LED,IF=60mA.
8. GENERAL TOLERANCE: ±0.3.
9. RoHS COMPLIANT.



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2016.12.02	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI12832J-G
APPROVED BY:				DESCRIPTION:
VERSION NO:	01			GRAPHIC MOUDLE

01	FIRST ISSUE	2016.12.02
VER.	REVISED DESCRIPTION	DATE