
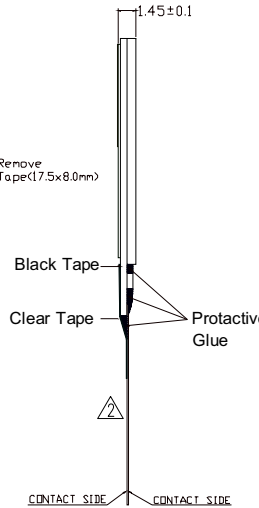
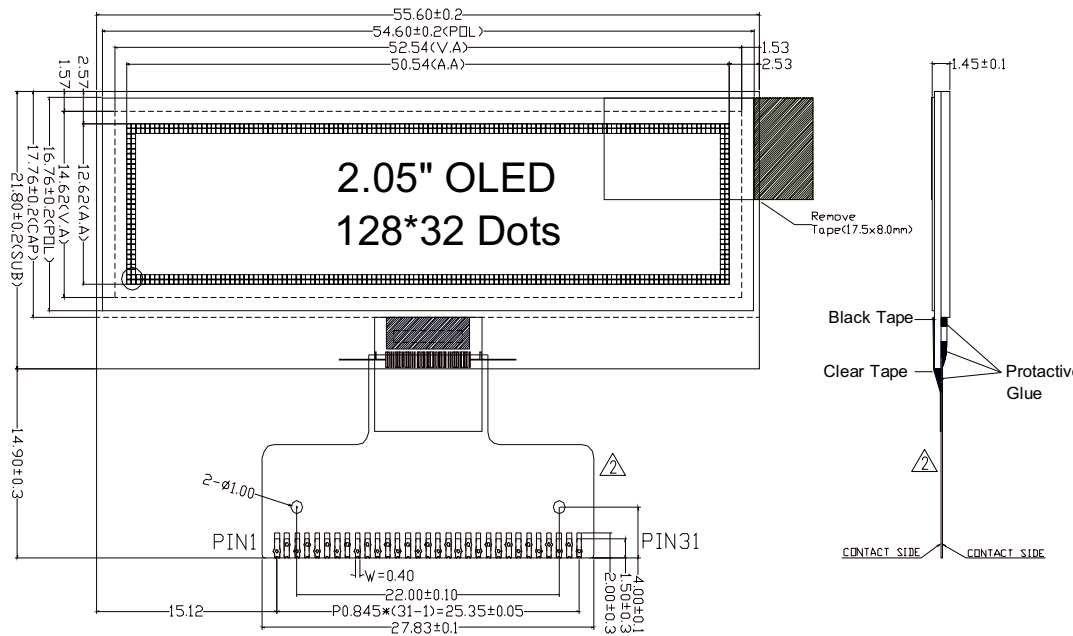
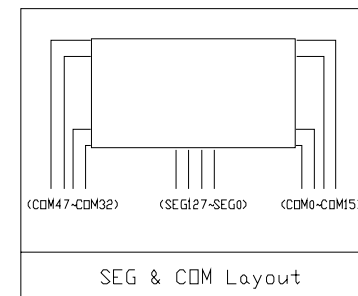


环保标准
■ ROHS标准
□ 《 有害物质管理标准 》





PIN DESCRIPTION			
PIN	SYMBOL	PIN	SYMBOL
1	NC	17	CS#
2	VCC	18	NC
3	VCOMH	19	BS2
4	IREF	20	BS1
5	D7	21	VDD
6	D6	22	NC
7	D5	23	NC
8	D4	24	NC
9	D3	25	NC
10	D2	26	NC
11	D1	27	NC
12	D0	28	NC
13	RD#	29	NC
14	WR#	30	VSS
15	D/C#	31	NC
16	RES#		



NOTES:

1. OPERATING TEMP.: -20°C ~ 70°C
2. STORAGE TEMP.: -30°C ~ 80°C
3. VIEWING DIRECTION: ALL
4. OLED DRIVER IC: SSD1309Z
5. DISPLAY COLOR: WHITE
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. () MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER
(客户装机时, 自己必须撕掉保护膜)

 MULTI-INNO TECHNOLOGY CO., LTD.				
DRAWN BY:	RITA	2013.07.30		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI12832KO-W
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO.:	01		SHEET No.: 1/1	OLED MODULE

02	REMOVE THE DOUBLE-SIDED TAPE ON THE FPC.	RITA	2021.07.15
01	FIRST ISSUE	CAROL	2013.07.30
VER.	REVISED DESCRIPTION	REVISER	DATE