





PIN	DESCRIPTION
1	N.C. (GND)
2	VLSS
3	VSS
4	N.C.
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	N.C. (GND)



NOTES:

1. COLOR: WHITE
 2. OPERATING VOLTAGE: VDD=2.8V (TYP.)
 3. DRIVE DUTY: 1/32
 4. DRIVER IC: SSD1305
 5. OPERATING TEMP.: -40°C ~ 70°C
 6. STORAGE TEMP.: -40°C ~ 85°C
 7. INTERFACE: 8-BIT 6800/8080 PARALLEL, 4-WIRE SPI, I²C
 8. GENERAL TOLERANCE: ±0.3MM
 9. ROHS COMPLIANT

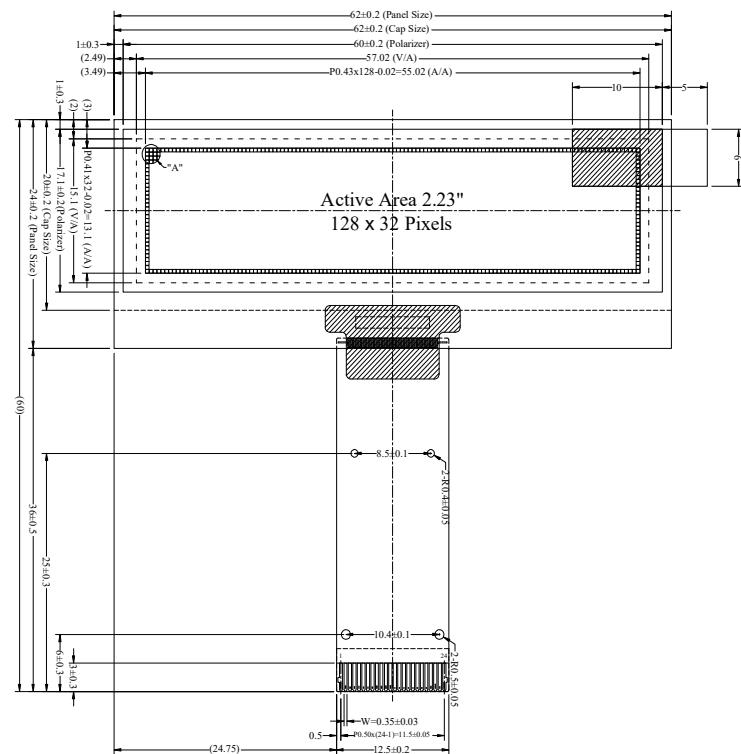

MULTI-INNO TECHNOLOGY CO., LTD.

		 MULTI-INNO TECHNOLOGY CO., LTD.			
		DRAWN BY:	rita 20230315		
		CHECKED BY:	SCALE : 1/1		
01	FIRST ISSUE	RITA	2023.03.15 APPROVED BY:	UNIT: mm	DESCRIPTION: OLED MODULE
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO.:	