



Pin Assignment	
NO.	SYMBOL
1	VSS
2	VCC-C
3	PRE
4	VCC-R
5	VDD
6	PSEL
7	VSS
8	VDDIO
9	RSTB
10	WRB
11	RDB
12	CSB
13	A0
14	D0
15	D1
16	D2
17	D3
18	D4
19	D5
20	D6
21	D7
22	PS
23	VDDIO
24	IREF (NC)
25	OSC1 (NC)
26	OSC2 (NC)
27	VSS
28	VDD
29	VDDL
30	VCC-R
31	PRE
32	VCC-C
33	VSS

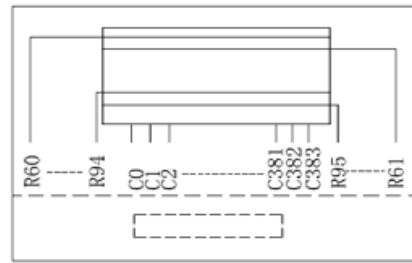

Com & Seg layout



Detail A (30:1)

Specification

1. Display: OLED(Full Color)
2. Format: 128\*3\*36
3. Driver IC: SP9230
4. General Tolerance:  $\pm 0.3$
5. Operate temp:  $-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$   
Storage temp:  $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
6. DUTY: 1/36
7. RoHS Compliant

**MIT** MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL	2015.10.28	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	MI12836CO-1
APPROVED BY:			mm	DESCRIPTION:
VER.	01	FIRST ISSUE	2015.10.28	01
VER.		REVISED DESCRIPTION	DATE	VERSION NO: