



128x64 Dots (2.4")




Detail A

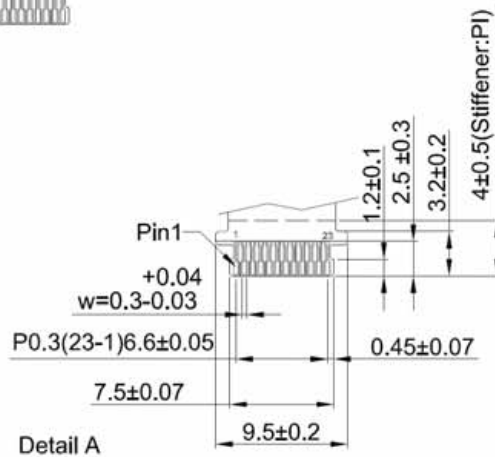

Contact side
0.2±0.03

Connector: Molex
502250-2391
Double-sided contact



Pin Assignment

| NO. | SYMBOL |
|-----|--------|
| 1 | VSS |
| 2 | VCC |
| 3 | VDD |
| 4 | BS0 |
| 5 | BS1 |
| 6 | BS2 |
| 7 | CS# |
| 8 | RES# |
| 9 | D/C# |
| 10 | W/R# |
| 11 | R/D |
| 12 | D0 |
| 13 | D1 |
| 14 | D2 |
| 15 | D3 |
| 16 | D4 |
| 17 | D5 |
| 18 | D6 |
| 19 | D7 |
| 20 | IREF |
| 21 | VCOMH |
| 22 | VCC |
| 23 | VSS |

Specification

1. Display: OLED (Yellow)
2. Dot Matrix: 128x64
3. Dot Size: 0.4x0.4mm
4. Dot Pitch: 0.43x0.43mm
5. Aperture Rate: 86%
6. Active Area: 55.01x27.49mm
7. IC: SPD0301



MULTI-INNO TECHNOLOGY CO., LTD.

| | | | | | |
|--------------|------------------|--------------|-------------|-------------|-------------|
| DRAWN BY: | CAROL 2016.01.18 | SCALE : | 1/1 | MODULE P/N: | |
| CHECKED BY: | | UNIT: | mm | | M12864AG0-Y |
| APPROVED BY: | | DESCRIPTION: | OLED MODULE | | |
| VERSION NO: | 01 | | | | |

| | | | |
|------|---------------------|---------|------------|
| 01 | FIRST ISSUE | CAROL | 2016.01.18 |
| VER. | REVISED DESCRIPTION | REVISER | DATE |