
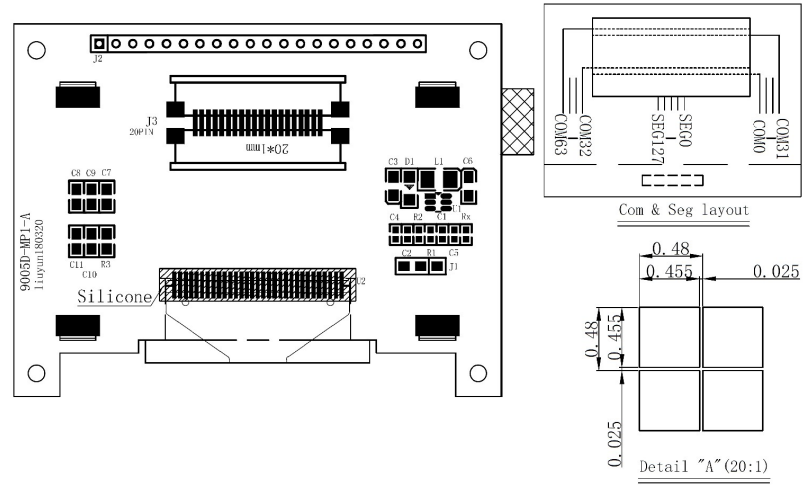


PIN DESCRIPTION	
PIN	SYMBOL
1	GND
2	VDD
3	NC
4	D/C#
5	R/W#
6	E(RD#)
7	D0
8	D1
9	D2
10	D3
11	D4
12	D5
13	D6
14	D7
15	CS#
16	RES#
17	M80/68#
18	MS
19	NC
20	FG

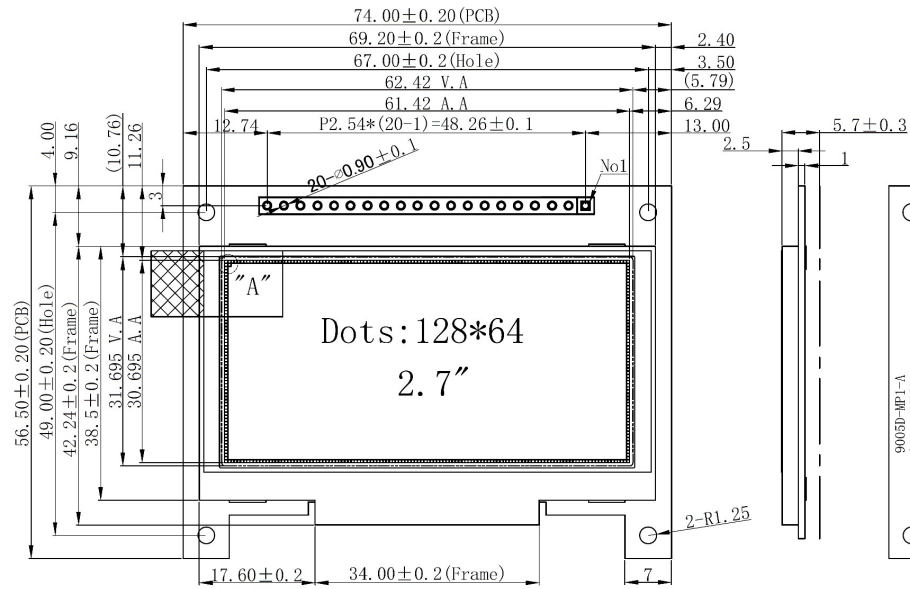

- NOTE:
- COLOR: GREEN
 - OPERATING VOLTAGE: VDD=3.3V (TYP.)
 - DRIVE DUTY: 1/64
 - DRIVER IC: SSD1305Z
 - OPERATING TEMP.: -20°C ~ 70°C
 - STORAGE TEMP.: -30°C ~ 80°C
 - INTERFACE: 8-BIT 6800/8080 PARALLEL, 4-WIRE SPI, I²C
 - GENERAL TOLERANCE: ±0.3MM
 - ROHS COMPLIANT

 MULTI-INNO TECHNOLOGY CO., LTD.

01	FIRST ISSUE	CAROL	2019.08.23	APPROVED BY:	SCALE : 1/1	MODULE P/N:	MI2864AKO-G1
VER.	REVISED DESCRIPTION	REVISOR	DATE	VERSION NO:	UNIT: mm	DESCRIPTION:	OLED MODULE
				01	SHEET NO.: 1/1		