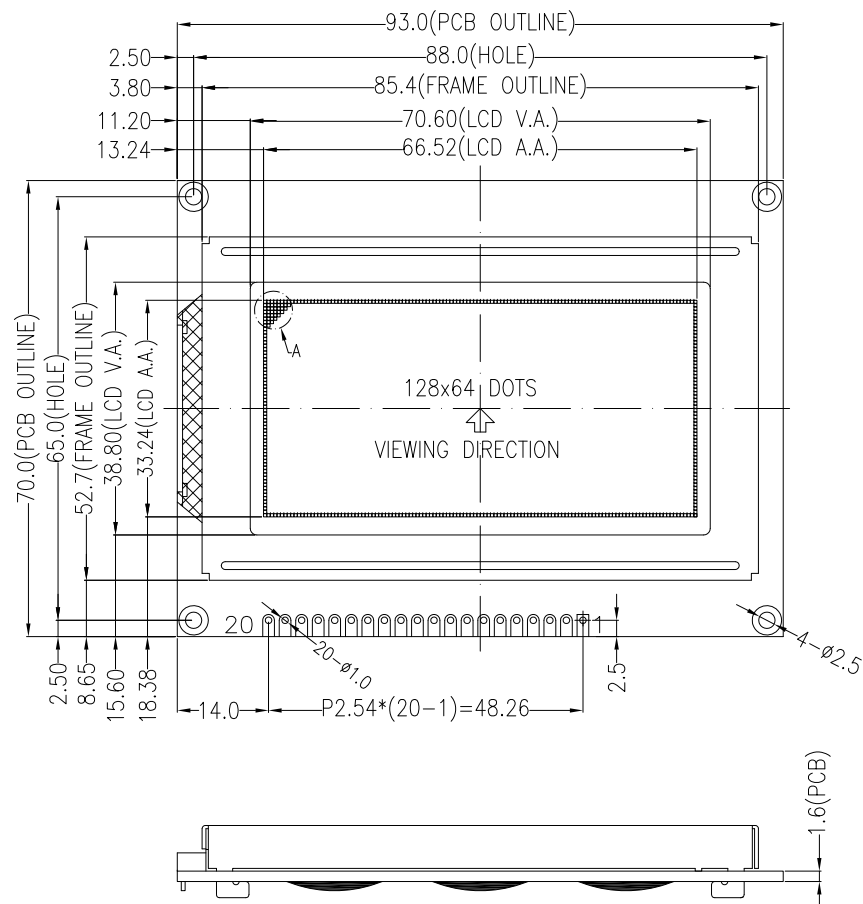


DETAIL A
(SCALE 10:1)

PIN ASSIGNMENT	
PIN	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	CS1
16	CS2
17	RST
18	VEE
19	LED A
20	LED K

NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLECTIVE, POSITIVE
2. OPERATING VOLTAGE: VDD=5.0V, VOP=10.5V
3. DRIVE METHOD: 1/64DUTY, 1/9BIAS
4. VIEWING DIRECTION: 6:00 O'CLOCK
5. DRIVER IC: AIP31107 + AIP31108 OR EQUIVALENT
6. OPERATING TEMP.: -20°C ~ 70°C
7. STORAGE TEMP.: -30°C ~ 80°C
8. BACKLIGHT: WHITE LED, If=45mA, Vf=5.0V
9. GENERAL TOLERANCE: ±0.3MM
10. ROHS COMPLIANT

01	FIRST ISSUE	RITA	2024.11.11
VER.	REVISED DESCRIPTION	REVISER	DATE

 MULTI-INNO TECHNOLOGY CO., LTD.					
DRAWN BY:		RITA		2024.11.11	
CHECKED BY:					
APPROVED BY:				SCALE : 1/1	
VERSION NO:		01		UNIT: mm	
				DESCRIPTION:	
				GRAPHIC MODULE	