
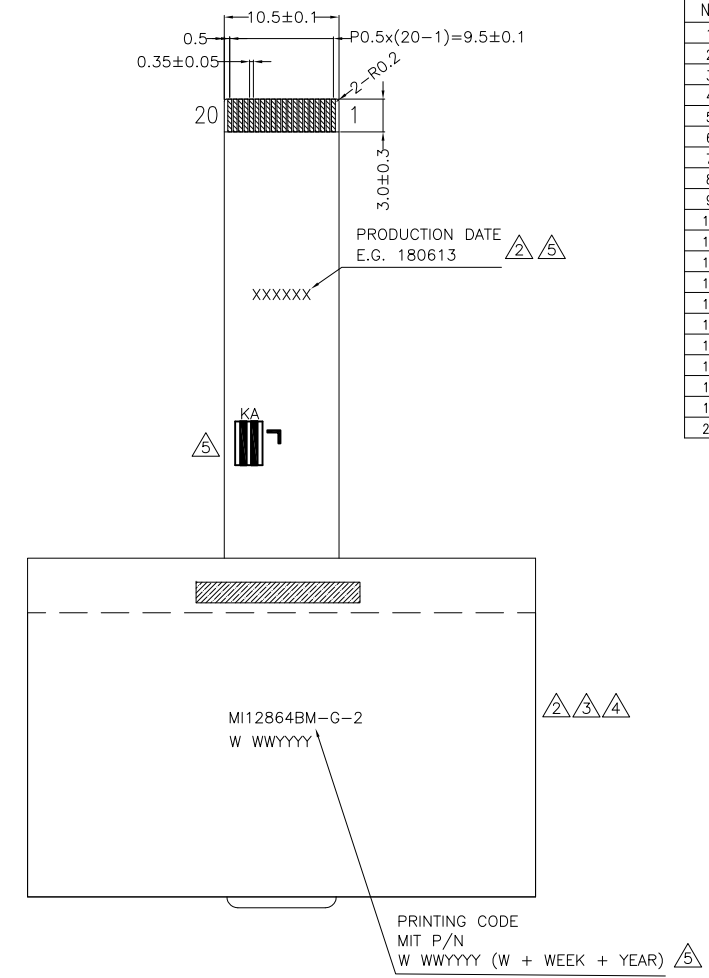

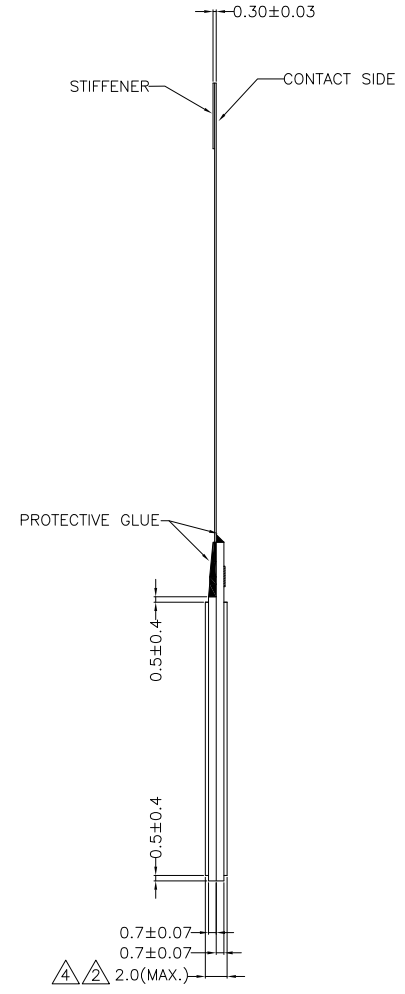


PIN ASSIGNMENT	
NO.	SYMBOL
1	NC
2	CSB
3	RSTB
4	RS
5	SCL
6	SDA
7	VDD
8	VSS
9	V0
10	XV0
11	VG
12	NC
13	NC
14	NC
15	NC
16	NC
17	A
18	A
19	K
20	K

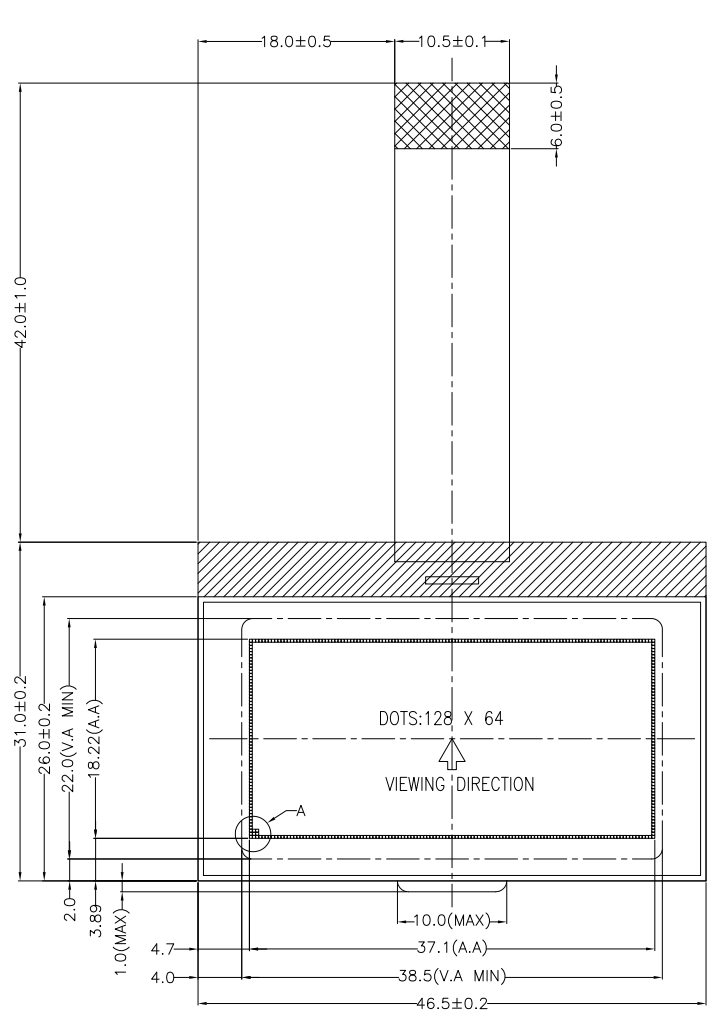

- NOTES:
- LCD TYPE: FSTN.
  - VIEWING DIRECTION: 6 O'CLOCK.
  - DRIVE METHOD: 1/65 DUTY, 1/9BIAS.
  - POLARIZER MPDE: POSITIVE/REFLECTIVE.
  - LCD OPERATING VOLTAGE: 9.5V.
  - VDD: 3.0V.
  - OPERATING TEMP.: -20°C ~ 70°C.
  - STORAGE TEMP.: -30°C ~ 80°C.
  - BACKLIGHT: -.
  - CONTROLLER: ST7567.
  - ALL UNMARKED TOLERANCES: ±0.3mm.

**MIT** MULTI-INNO TECHNOLOGY CO.,LTD.

05	CORRECT THE POSITION OF THE BACKLIGHT PAD. ADD PRINTING CODE ON THE BACK OF MODULE.	RITA	2020.09.23
04	REMOVE THE GASKET ON THE BACK OF THE MODULE. ADD P/N OF THE GASKET. MODIFY THE GASKET SIZE AND THICKNESS. MODIFY TOTAL THICKNESS.	RITA	2020.09.23
03	MODIFY LOCATION OF MIT P/N ADD D.S.T ON THE BACK OF THE MODULE	RITA	2018.12.29
02	FIRST ISSUE	RITA	2018.06.14
VER.	REVISED DESCRIPTION	REVISER	DATE

DRAWN BY:	RITA	2018.06.14	SCALE : 1/1	MODULE P/N:	MI12864BM-G-2
CHECKED BY:			UNIT:	mm	DESCRIPTION:
APPROVED BY:					GRAGHC MODULE
VERSION NO:	05				