



PIN ASSIGNMENT	
NO.	SYMBOL
1	V0
2	V1
3	V2
4	V3
5	V4
6	CAP2N
7	CAP2P
8	CAP1P
9	CAP1N
10	CAP3P
11	VOUT
12	VSS
13	VDD
14	SI
15	SCL
16	AO
17	/RES
18	/CS1

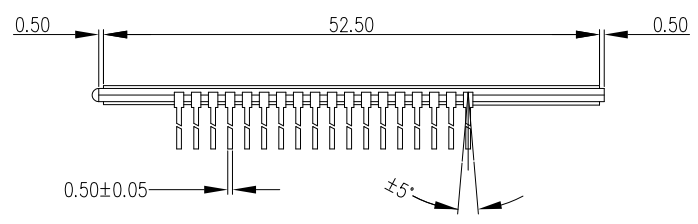

FUNCTION TABLE

			COM63
			COM32
COM31			
COM0			
SEG0		SEG127	

NOTES:

1. DISPLAY TYPE: FSTN, REFLECTIVE, POSITIVE.
2. DRIVE METHOD: 1/65DUTY, 1/9BIAS, VDD=3.0V, VOP=9.0V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: ST7565P.
5. OPERATING TEMP.: -20°~70°.
6. STORAGE TEMP.: -30°~80°.
7. BACKLIGHT TYPE: -.
8. GENERAL TOLERANCE: ±0.2.
9. ROHS COMPLIANT.

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	RITA	2017.07.24	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT:	M12864BN-G
APPROVED BY:			mm	DESCRIPTION:
VERSION NO:	02			GRAPHIC MODULE

VER.	REVISD DESCRIPTION	REVISER	DATE
02	UPDATE OPERATING AND STORAGE TEMPERATURE	CAROL	2017.08.15
01	FIRST ISSUE	RITA	2017.07.24