





1. DISPLAY TYPE: FSTN, TRANSFLECTIVE, POSITIVE
2. OPERATING VOLTAGE: VDD=3.3V, VOP=9.6V
3. DRIVE METHOD: 1/64DUTY, 1/9BIAS
4. VIEWING DIRECTION: 6:00 O'CLOCK
5. DRIVER IC: ST7565P
6. OPERATING TEMP.: -20°C ~ 70°C
7. STORAGE TEMP.: -30°C ~ 80°C
8. LED BACKLIGHT: -
9. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE
AND THE MINIMUM BEND RADIUS IS 1.5MM
10. UNMARKED TOLERANCE: ±0.3MM
11. ROHS COMPLIANT



DETAIL A


(SCALE 20:1)

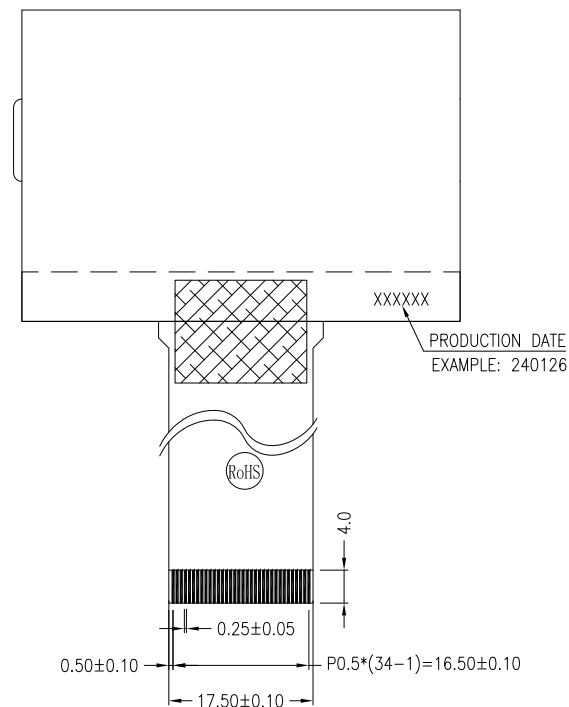

PIN ASSIGNMENT	
PIN	SYMBOL
1	IRS
2	/HPM
3	P/S
4	C86
5	VR
6	V0
7	V1
8	V2
9	V3
10	V4
11	VRS
12	CAP4+
13	CAP2−
14	CAP2+
15	CAP1+
16	CAP1−
17	CAP3+
18	CAP5+
19	VOUT
20	VSS
21	VDD
22	D7
23	D6
24	D5
25	D4
26	D3
27	D2
28	D1
29	D0
30	/RD(E)
31	/WR(R/W)
32	A0
33	/RES
34	/CS1

01	FIRST ISSUE	RITA	2024.01.26	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	01	SHEET NO.: 1/2	GRAPHIC MODULE

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	RITA	2024.01.26	
CHECKED BY:			MODULE P/N: MI12864CI-G
APPROVED BY:		UNIT: mm	DESCRIPTION: GRAPHIC MODULE
VERSION NO:	01	SHEET NO.: 1/2	

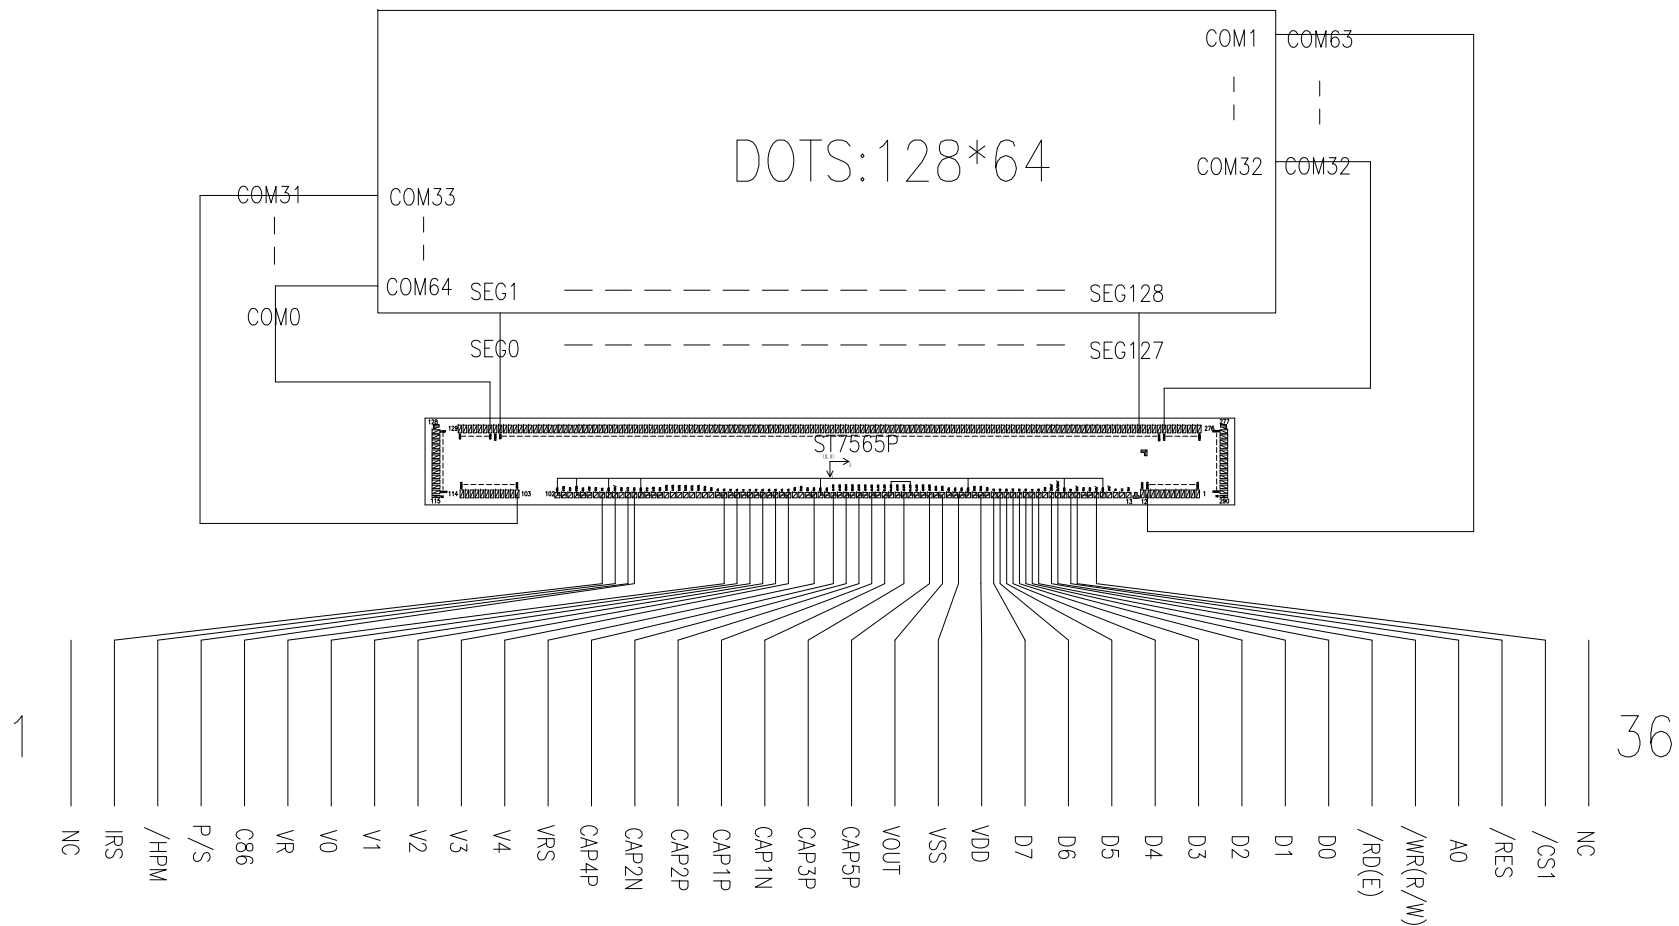

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2024.01.26		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI12864CI-G
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	GRAPHIC MODULE

01	FIRST ISSUE	RITA	2024.01.26
VER.	REVISED DESCRIPTION	REVISER	DATE