
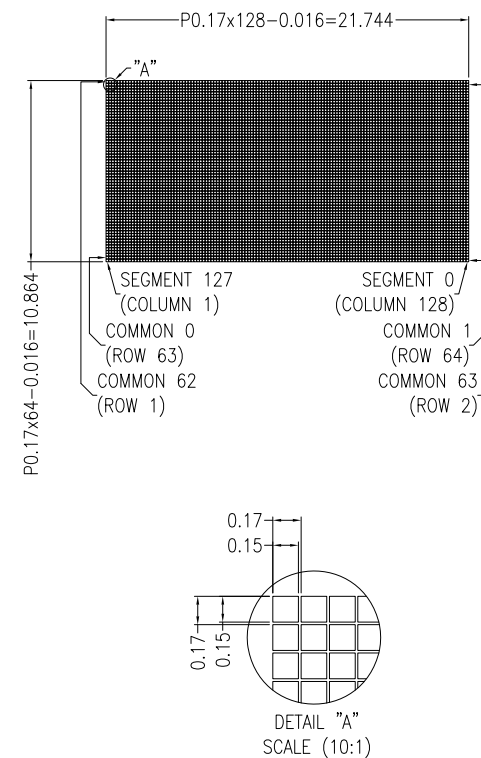
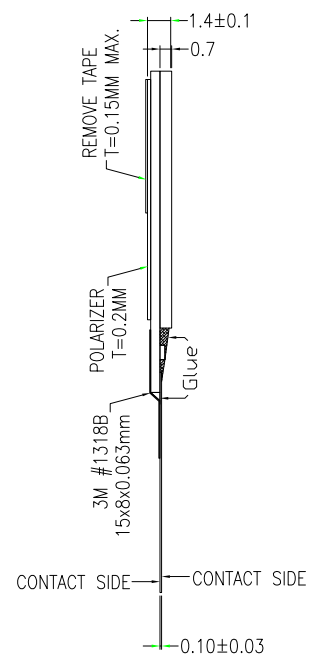


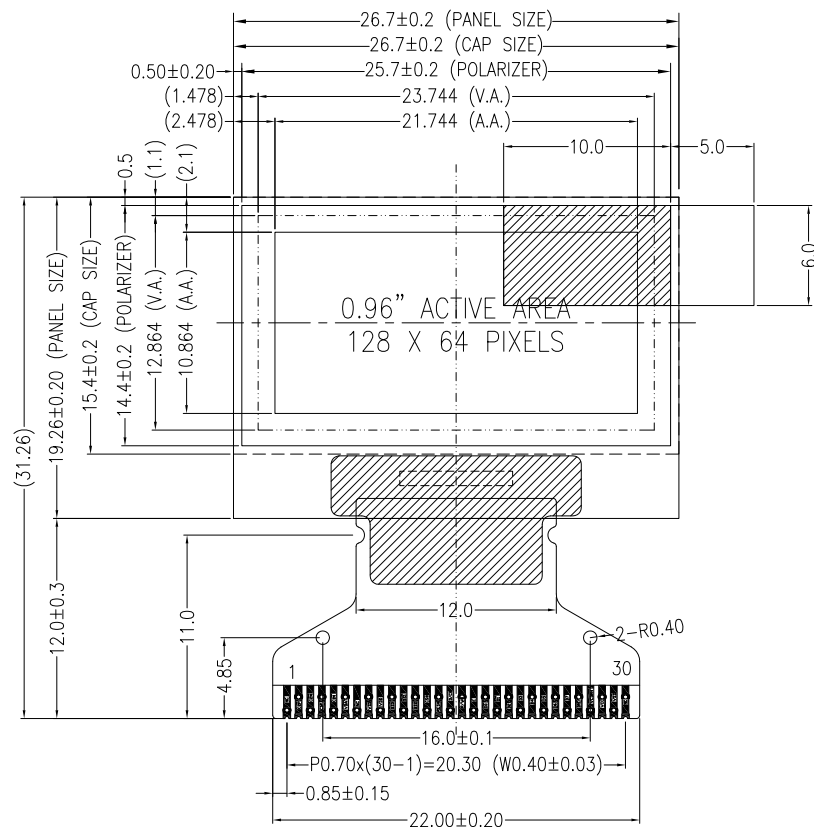

PIN DESCRIPTION	
PIN	SYMBOL
1	N.C.(GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	N.C.
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E/RD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VLSS
30	N.C.(GND)

NOTES:

1. COLOR: WHITE
2. DRIVER IC: SSD1306
3. OPERATING TEMP.: -40°C ~ 85°C
4. STORAGE TEMP.: -40°C ~ 85°C
5. INTERFACE: 8-BIT 68XX/80XX PARALLEL, 3-/4-WIRE SPI, IIC
6. GENERAL TOLERANCE: ±0.3mm
7. ROHS COMPLIANT

01	FIRST ISSUE	CAROL	2020.09.24	APPROVED BY:		SHEET 1 / 1	DESCRIPTION: OLED MODULE
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	01	SHEET NO.: 1/1	

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL	2020.09.24	
CHECKED BY:			MODULE P/N:
APPROVED BY:			MI12864L20-W
VERSION NO:	01		DESCRIPTION:
		SHEET NO.: 1/1	OLED MODULE