

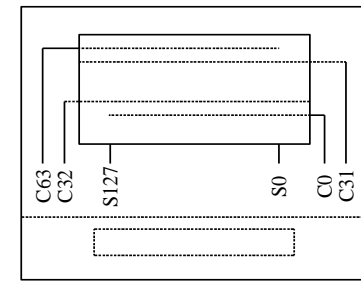
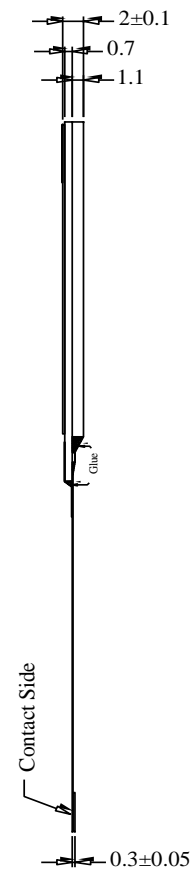


PIN DESCRIPTION

PIN	SYMBOL
1	NC(GND)
2	VSS
3	NC
4	NC
5	NC
6	NC
7	NC
8	NC
9	NC
10	NC
11	VDD
12	BS1
13	BS2
14	NC
15	CS#
16	RES#
17	DC#
18	R/W#
19	E/RD#
20	DO
21	D1
22	D2
23	D3
24	D4
25	D5
26	D6
27	D7
28	IREF
29	VCOMH
30	VCC
31	NC(GND)

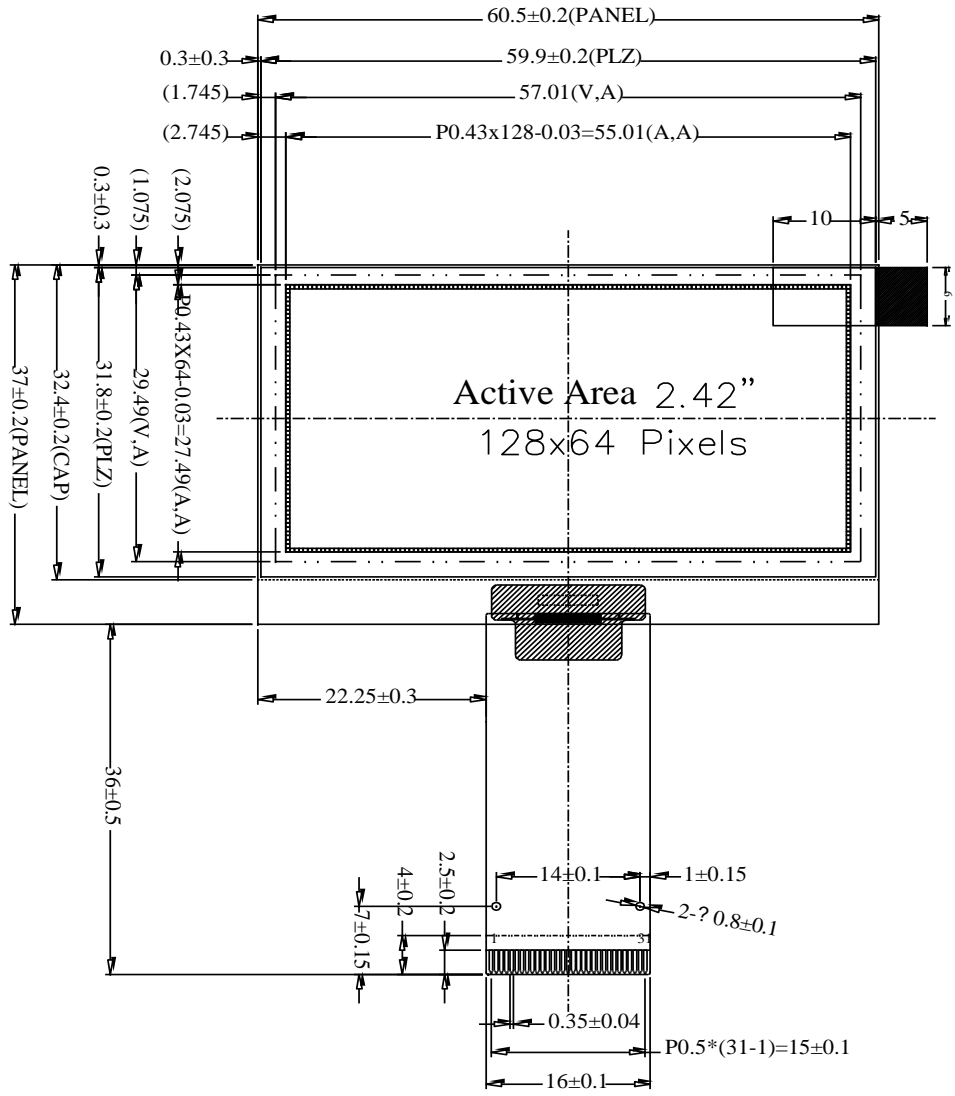

NOTES:

- COLOR: YELLOW
- DRIVE DUTY: 1/64
- DRIVER IC: SSD1309
- OPERATING TEMP.: -40°C ~ 70°C
- STORAGE TEMP.: -40°C ~ 85°C
- INTERFACE: 8-BIT 6800/8080 PARALLEL, 4-WIRE SPI, I²C
- ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
- GENERAL TOLERANCE: ±0.3MM
- ROHS COMPLIANT

Mit MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.10.25		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI12864M20-Y
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE

01	FIRST ISSUE	CAROL	2022.10.25
VER.	REVISED DESCRIPTION	REVISER	DATE