
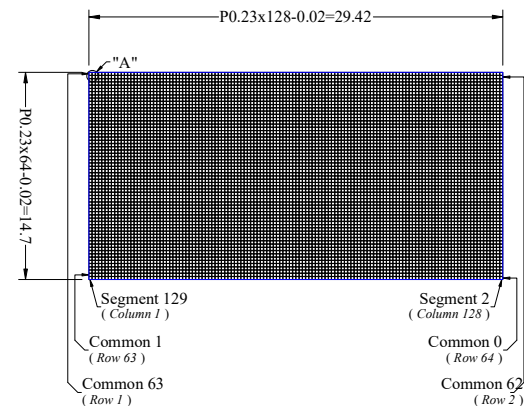
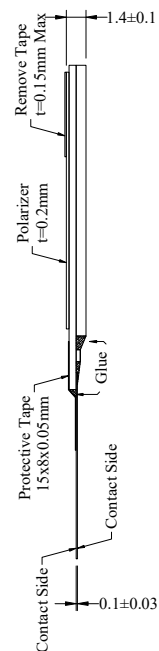


DETAIL "A"
SCALE (10:1)

PIN ASSIGNMENT	
PIN	SYMBOL
1	N.C.(GND)
2	C2P
3	C2N
4	C1P
5	C1N
6	VBAT
7	NC
8	VSS
9	VDD
10	BS0
11	BS1
12	BS2
13	CS#
14	RES#
15	D/C#
16	R/W#
17	E/RD#
18	D0
19	D1
20	D2
21	D3
22	D4
23	D5
24	D6
25	D7
26	IREF
27	VCOMH
28	VCC
29	VLSS
30	N.C.(GND)

NOTES:

- COLOR: WHITE
- OPERATING VOLTAGE: VDD=3.0V (TYP.)
- DRIVE DUTY: 1/64
- DRIVER IC: CH1116
- OPERATING TEMP.: -40°C ~ 85°C
- STORAGE TEMP.: -40°C ~ 85°C
- INTERFACE: 8-BIT 6800/8080 PARALLEL, 3-/4-WIRE SPI, IIC
- UNMARKED TOLERANCE: ±0.3MM
- ROHS COMPLIANT

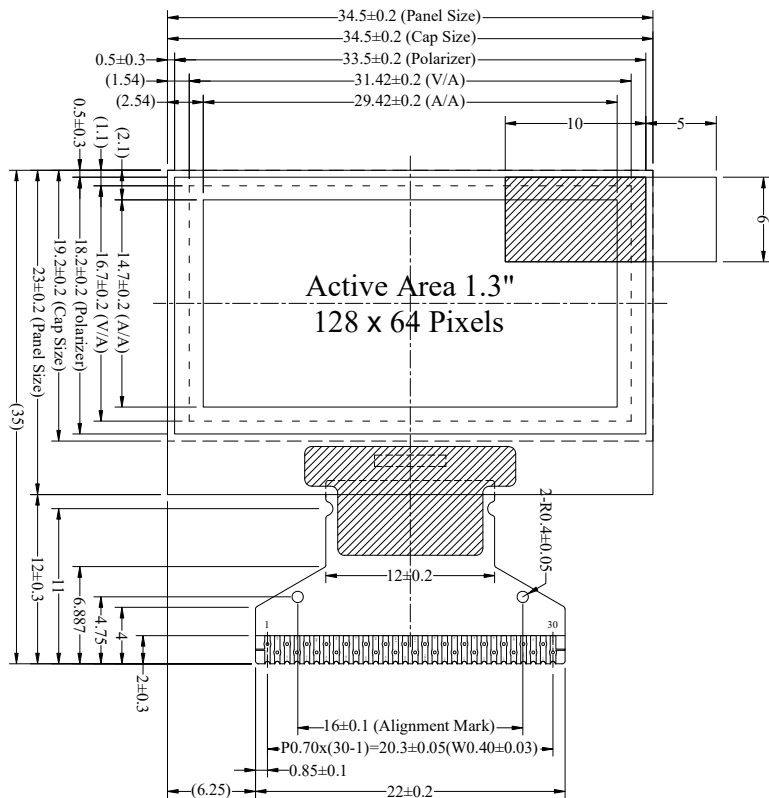

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2024.03.20		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI12864X40-W
APPROVED BY:			UNIT: mm	DESCRIPTION:
VER.	01	FIRST ISSUE	SHEET NO.: 1/1	OLED MODULE

01	FIRST ISSUE	RITA	2024.03.20
VER.	REVISED DESCRIPTION	REVISER	DATE