



PIN DESCRIPTION	
PIN	SYMBOL
1	CABC_EN(NC)
2	H_GND
3	LINE1_N
4	LINE1_P
5	H_GND
6	LINE0_N
7	LINE0_P
8	H_GND
9	AUX_P
10	AUX_N
11	H_GND
12	VCC
13	VCC
14	BIST(NC)
15	GND
16	GND
17	HPD
18	LED_K
19	LED_K
20	LED_K
21	LED_K
22	BL_EN
23	BL_PWM
24	NC
25	NC
26	VLED
27	VLED
28	VLED
29	VLED
30	NC

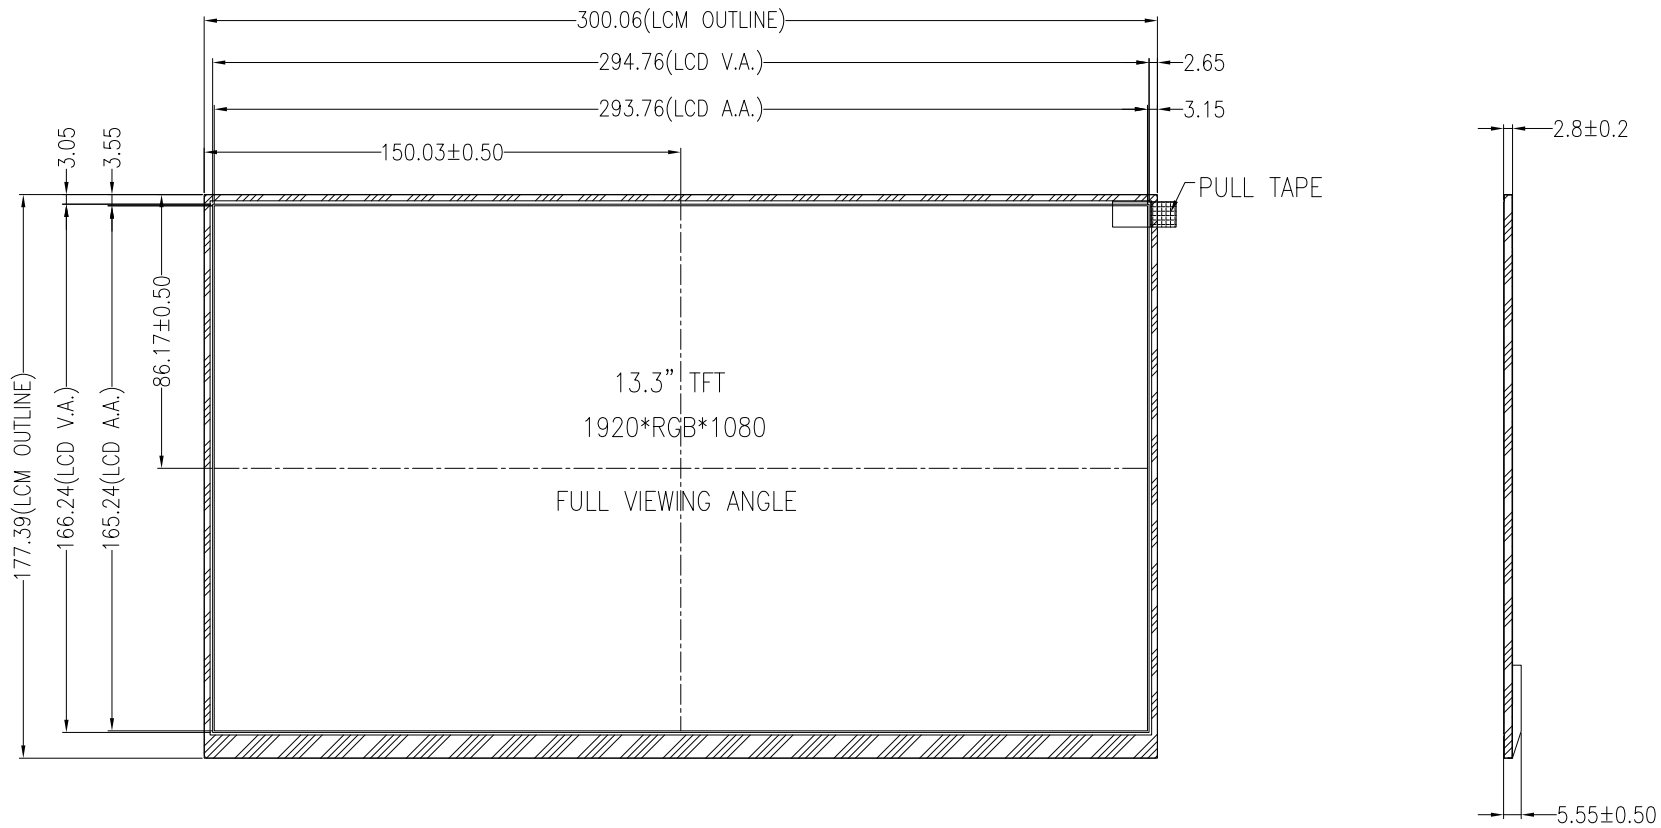


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: HX8036
5. OPERATING TEMP.: 0°C ~ 50°C
6. STORAGE TEMP.: -20°C ~ 60°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VLED=5.0V~24V
8. SURFACE LUMINANCE: 300 CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

01	FIRST ISSUE	CAROL	2023.08.10	APPROVED BY:	SCALE : 1/1	MODULE P/N:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	UNIT: mm	MI1330FT-1
					SHEET NO.: 1/2	DESCRIPTION:
						TFT MODULE



MULTI-INNO TECHNOLOGY CO., LTD.

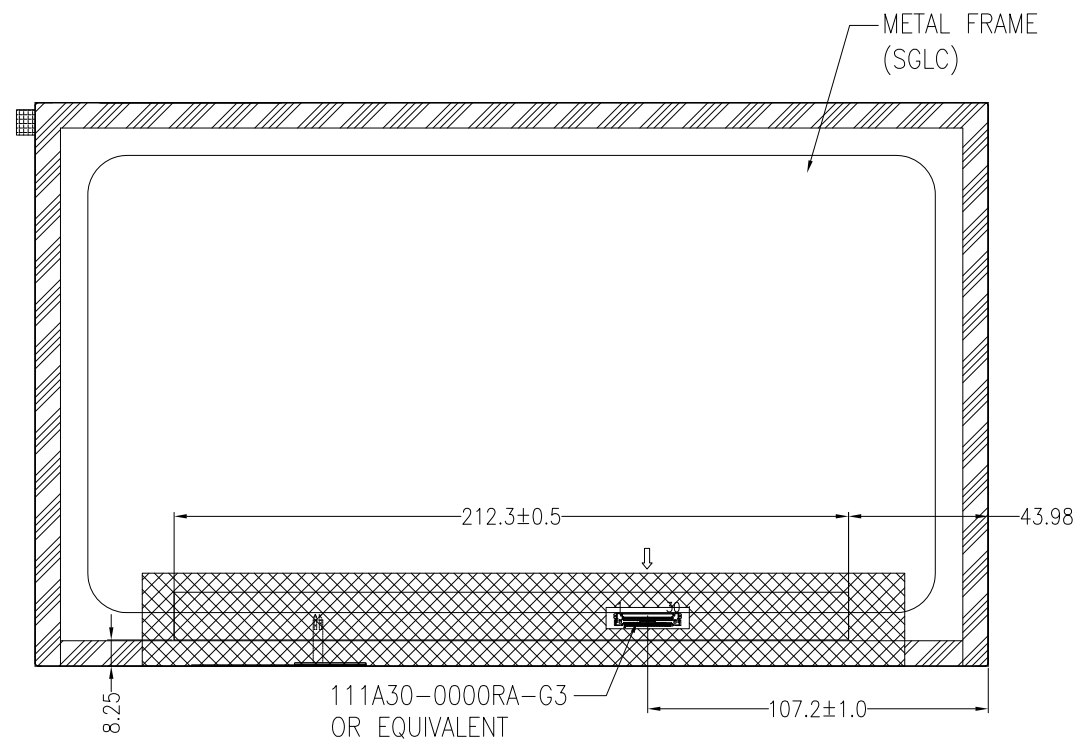

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.08.10		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1330FT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2023.08.10
VER.	REVISED DESCRIPTION	REVISER	DATE