


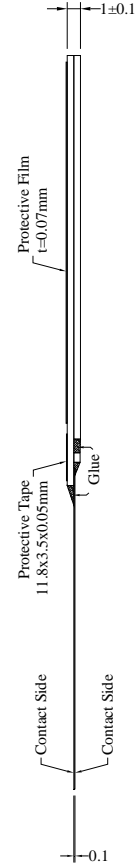


PIN DESCRIPTION	
PIN	SYMBOL
1	GND
2	VCC
3	VSL
4	VSEGM
5	VCOMH
6	GND
7	VDD
8	IREF
9	SCB
10	RESB
11	A0
12	SCL
13	SI
14	GND

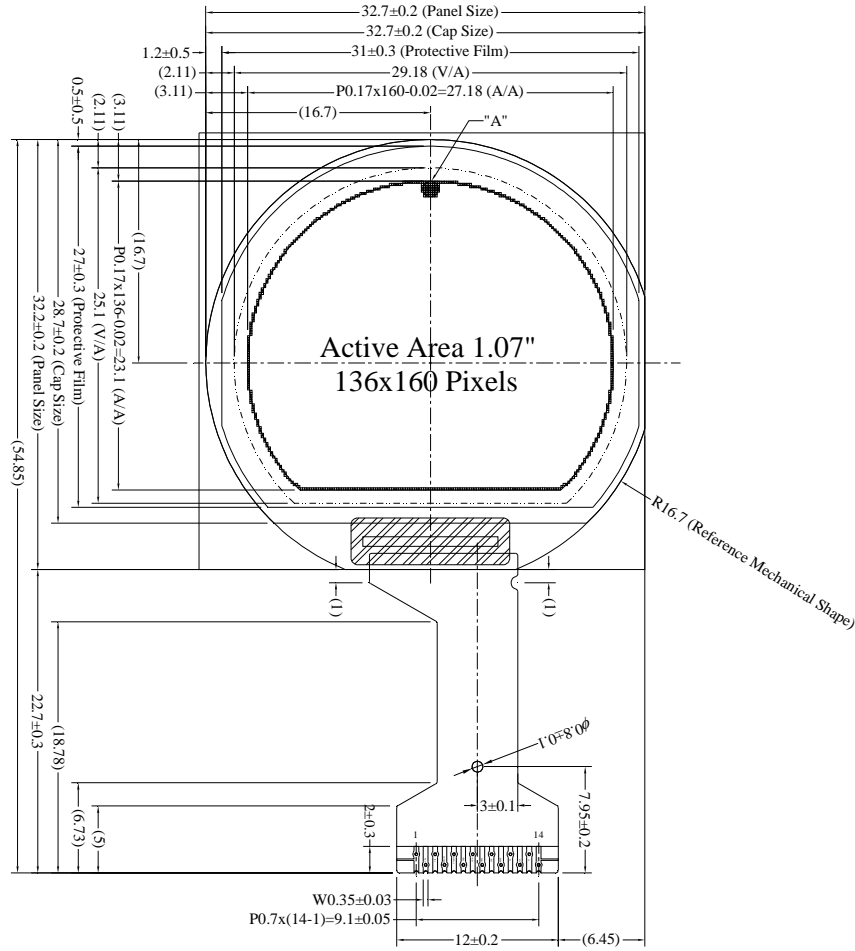


Detail "A"  
Scale (10:1)

NOTES:

- COLOR: WHITE
- DRIVE DUTY: 1/160
- DRIVER IC: SH1108
- OPERATING TEMP.: -40°C ~ 70°C
- STORAGE TEMP.: -40°C ~ 85°C
- INTERFACE: 4-WIRE SPI
- ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
- GENERAL TOLERANCE: ±0.3MM
- ROHS COMPLIANT

 MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2022.01.10		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI136160A0-W
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE

01	FIRST ISSUE	CAROL	2022.01.10
VER.	REVISED DESCRIPTION	REVISER	DATE