

PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	VCC
2	VCC
3	GND
4	GND
5	D0-
6	D0+
7	GND
8	D1-
9	D1+
10	GND
11	D2-
12	D2+
13	GND
14	CLK-
15	CLK+
16	GND
17	D3-
18	D3+
19	MSL
20	FRC
PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VDD
2	GND
3	BRTC
4	PWM
5	NC

NOTES:


1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: 12 O'CLOCK
4. DRIVER IC: -
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VDD=12.0V
8. SURFACE LUMINANCE: 400CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. USER HOLE ROTATIONAL TORQUE: 4KGF-CM
11. LVDS TYPE: STM MSB240420HE OR EQUIVALENT
12. LED POWER CONNECTOR TYPE: STM MSB24038P5 OR EQUIVALENT
13. GENERAL TOLERANCE: ±0.5MM
14. ROHS COMPLIANT



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2012.06.12		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1500HT-3
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	02		SHEET NO.: 1/2	TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
02	MODIFY THE BEZEL GROOVE OF THE TFT, AND TAPE AND CAUTION LABEL	RITA	2016.12.13
01	FIRST ISSUE	CAROL	2012.06.12

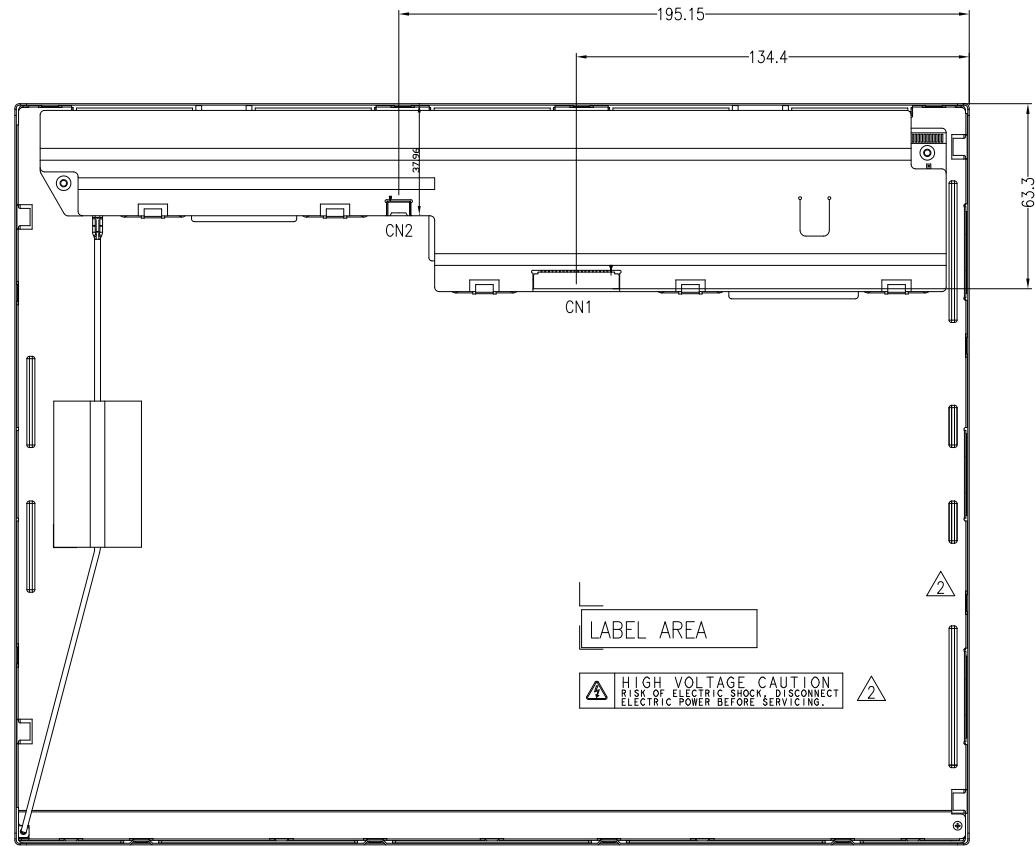

MULTI-INNO TECHNOLOGY CO., LTD.

02	MODIFY THE BEZEL GROOVE OF THE TFT, AND TAPE AND CAUTION LABEL	RITA	2016.12.13
01	FIRST ISSUE	CAROL	2012.06.12
VER.	REVISED DESCRIPTION	REVISOR	DATE

DRAWN BY:	CAROL	2012.06.12		MODULE P/N:	
CHECKED BY:			SCALE : 1/1		M1500HT-3
APPROVED BY:			UNIT: mm		DESCRIPTION:
VERSION NO:	02		SHEET NO.: 2/2		TFT MODULE