

PIN DESCRIPTION FOR CN1

PIN	SYMBOL
1	VDD
2	VDD
3	VSS
4	REV
5	RIN0-
6	RIN0+
7	VSS
8	RIN1-
9	RIN1+
10	VSS
11	RIN2-
12	RIN2+
13	VSS
14	CLKIN-
15	CLKIN+
16	VSS
17	RIN3-
18	RIN3+
19	VSS
20	SEL 6/8

PIN DESCRIPTION FOR CN2

PIN	SYMBOL
1	VCC
2	GND
3	ENABLE
4	DIMMING
5	NC



NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VDD=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: -
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 32-CHIP WHITE LED
BUILT-IN BACKLIGHT DRIVER: VCC=12.0V
8. SURFACE LUMINANCE: 300CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: HAZE
10. GENERAL TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

02	CORRECT THE DESIGN OF BACKLIGHT	CAROL	2017.01.04
01	FIRST ISSUE	CAROL	2015.11.27
VER.	REVISED DESCRIPTION	REVISER	DATE

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2015.11.27		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1500KT-3
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	02		SHEET NO.: 1/2	TFT MODULE

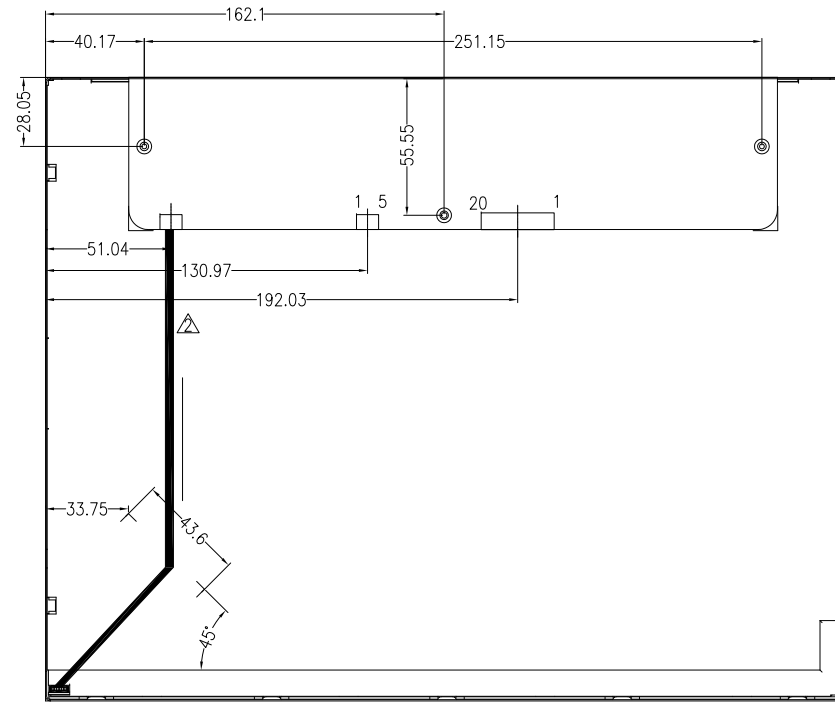

BACKLIGHT CIRCUIT DIGARAM



MULTI-INNO TECHNOLOGY CO., LTD.

02	CORRECT THE DESIGN OF BACKLIGHT	CAROL	2017.01.04		MODULE P/N:	
01	FIRST ISSUE	CAROL	2015.11.27		SCALE : 1/1	MI1500KT-3
VER.	REVISED DESCRIPTION	REVISER	DATE	APPROVED BY:	UNIT: mm	DESCRIPTION:
				VERSION NO: 02	SHEET NO.: 2/2	TFT MODULE