


PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	VCC
2	VCC
3	NC
4	LR/UD
5	RX0-
6	RX0+
7	GND
8	RX1-
9	RX1+
10	GND
11	RX2-
12	RX2+
13	GND
14	RXCLK-
15	RXCLK+
16	GND
17	RX3-
18	RX3+
19	NC
20	SEL68

PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VI
2	VGND
3	EN
4	DIMMING
5	NC


- NOTES:
1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
 2. OPERATING VOLTAGE: VCC=3.3V
 3. VIEWING DIRECTION: FULL VIEWING ANGLE
 4. DRIVER IC: -
 5. OPERATING TEMP.: -20°C ~ 70°C
 6. STORAGE TEMP.: -30°C ~ 70°C
 7. LED BACKLIGHT: LED, If=290mA, Vf=12V
 8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
 9. SURFACE LUMINANCE: 350CD/M²(TYP)
 10. ROTATIONAL TORQUE MUST BE MINIMUM 4kgf-cm, RE-SCREWED 10 TIMES
 11. CONNECTOR TYPE:
CN1: CVILUX CID520D1HRO-NH
CN2: CVILUX CI4205M2HRP-NH
 12. GENERAL TOLERANCE: ±0.5MM
 13. ROHS COMPLIANT



MI MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY: CAROL	2017.04.07		MODULE P/N:
CHECKED BY:		SCALE: 1/1	MI1500MT-1
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO: 02		SHEET NO.: 1/2	TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
02	UPDATE THE BRIGHTNESS.	RITA	2020.10.20
01	FIRST ISSUE	CAROL	2017.04.07

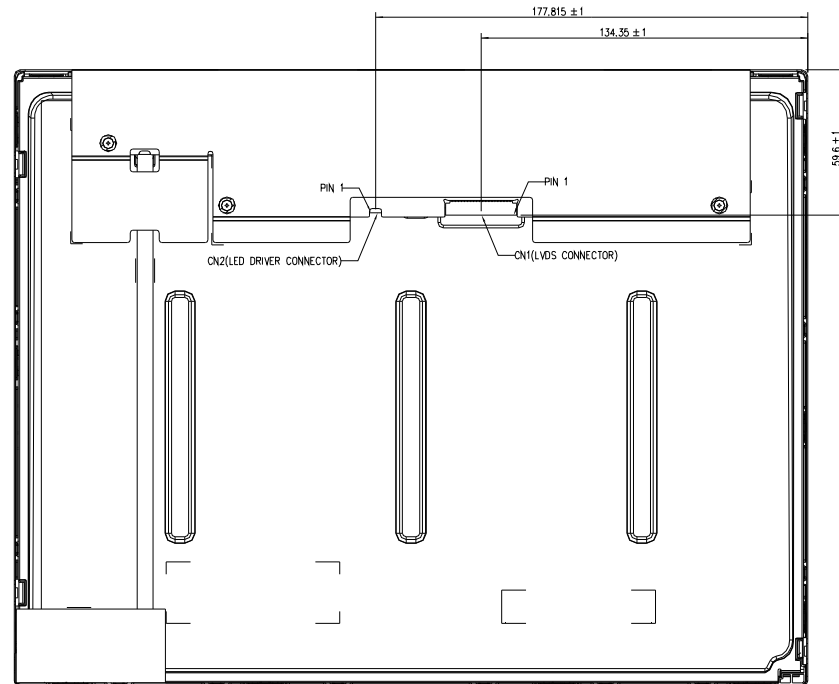

MULTI-INNO TECHNOLOGY CO.,LTD.

02	UPDATE THE BRIGHTNESS.	RITA	2020.10.20	DRAWN BY:	CAROL	2017.04.07		MODULE P/N:	
01	FIRST ISSUE	CAROL	2017.04.07	CHECKED BY:			SCALE : 1/1	MI1500MT-1	
VER.	REVISED DESCRIPTION	REVISER	DATE	APPROVED BY:			UNIT: mm	DESCRIPTION:	
				VERSION NO:	02		SHEET NO.: 1/2	TFT MODULE	