





NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. OPERATING TEMP.: -20°C ~ 70°C
5. STORAGE TEMP.: -30°C ~ 80°C
6. BACKLIGHT TYPE: WHITE LED, BUILT-IN BACKLIGHT DRIVER: VLED=12V (2)
7. SURFACE LUMINANCE: 1000CD/M² (TYP.) (2)
8. TOP POLARIZER SURFACE TREATMENT: GLARE
9. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

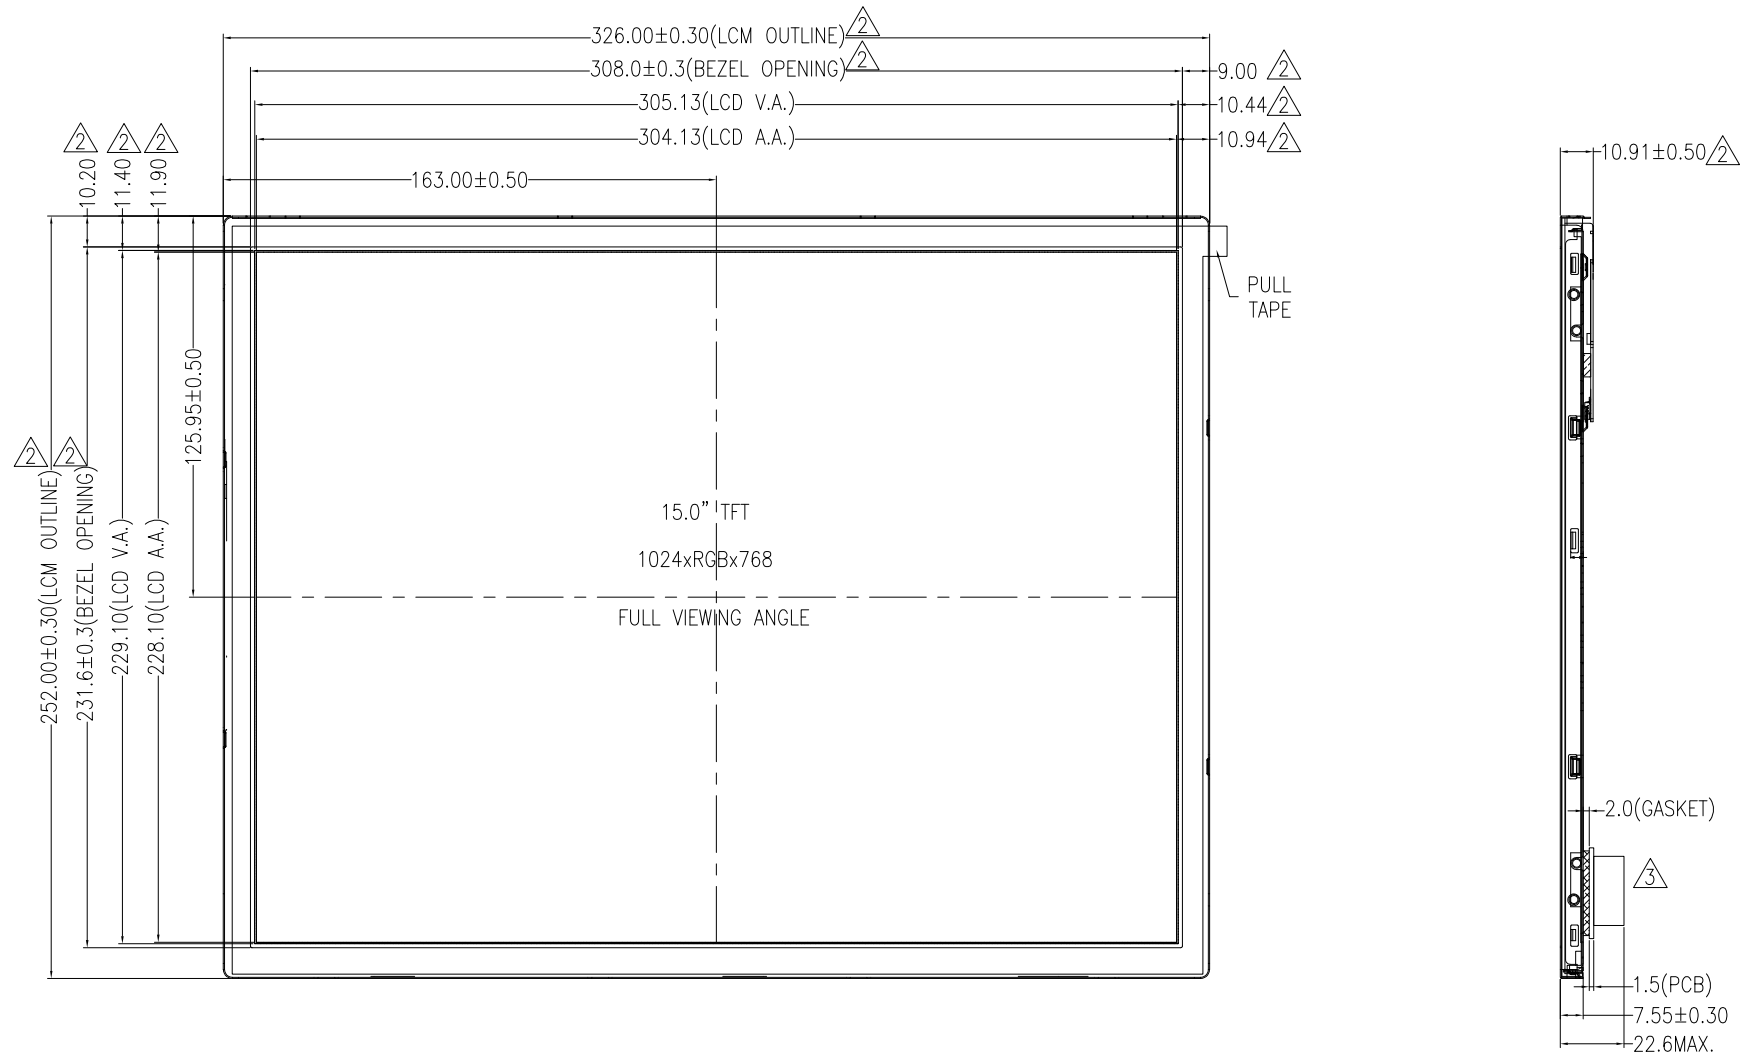

MULTI-INNO TECHNOLOGY CO., LTD.

03	MODIFY THE POSITION OF THE BACKLIGHT DRIVER BOARD	RITA	2025.04.16	DRAWN BY:	RITA		MODULE P/N:
02	MODIFY THE BACKLIGHT DESIGN	RITA	2025.04.10	CHECKED BY:		SCALE : 1/1	MI1500ST-2
01	FIRST ISSUE	RITA	2024.09.18	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	03	SHEET NO.: 1/2	TFT MODULE

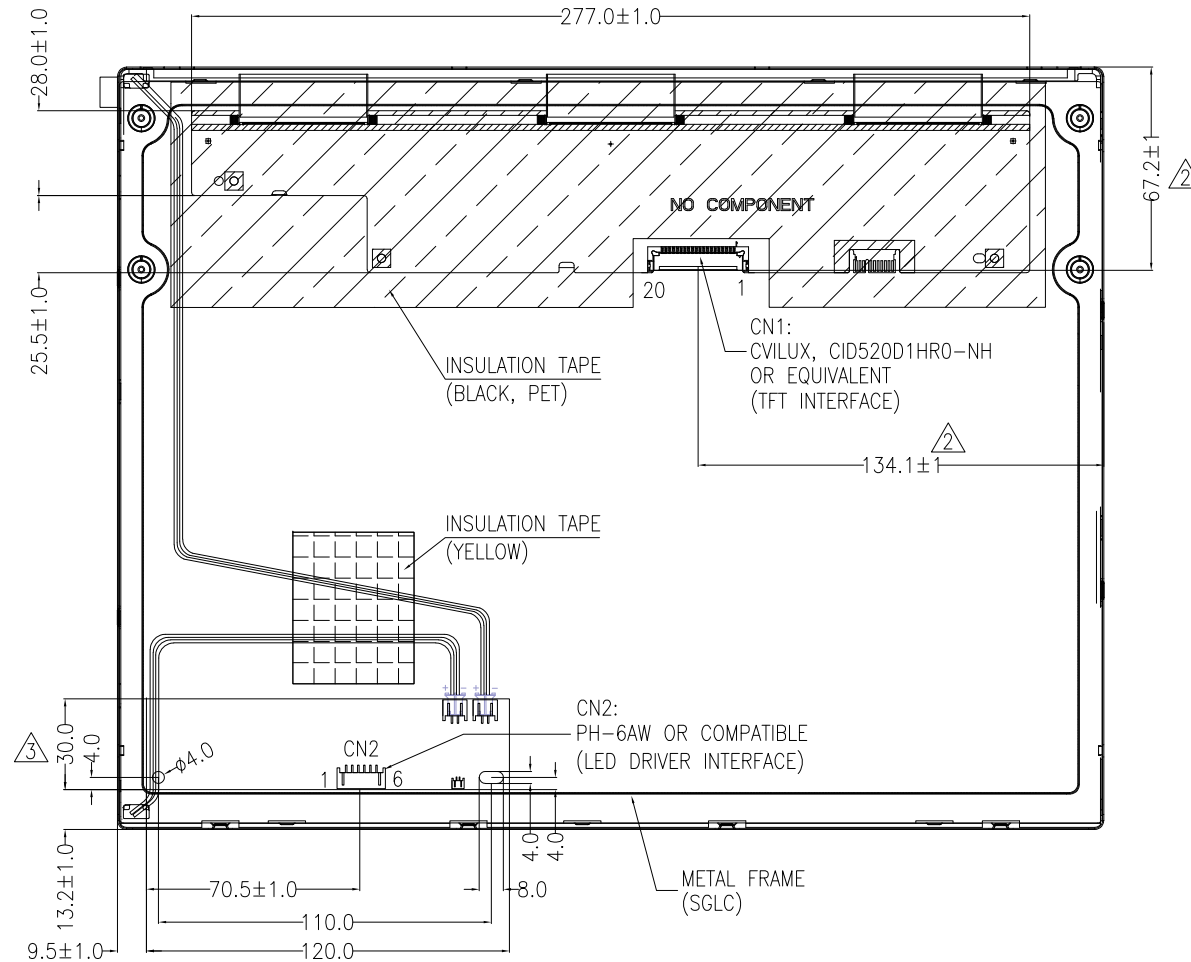

CN1 (LCM)	
PIN	SYMBOL
1	VCC
2	VCC
3	SDA
4	LR/UD
5	RX0-
6	RX0+
7	GND
8	RX1-
9	RX1+
10	NC
11	RX2-
12	RX2+
13	GND
14	RXCLK-
15	RXCLK+
16	GND
17	RX3-
18	RX3+
19	SCL
20	SEL68

CN2 (LED DRIVER)	
PIN	SYMBOL
1	VLED
2	VLED
3	ON/OFF
4	ADJ
5	VSS
6	VSS



MULTI-INNO TECHNOLOGY CO., LTD.

03	MODIFY THE POSITION OF THE BACKLIGHT DRIVER BOARD	RITA	2025.04.16	DRAWN BY:	RITA		MODULE P/N:
02	MODIFY THE BACKLIGHT DESIGN	RITA	2025.04.10	CHECKED BY:		SCALE : 1/1	MI1500ST-2
01	FIRST ISSUE	RITA	2024.09.18	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	03	SHEET NO.: 2/2	TFT MODULE