

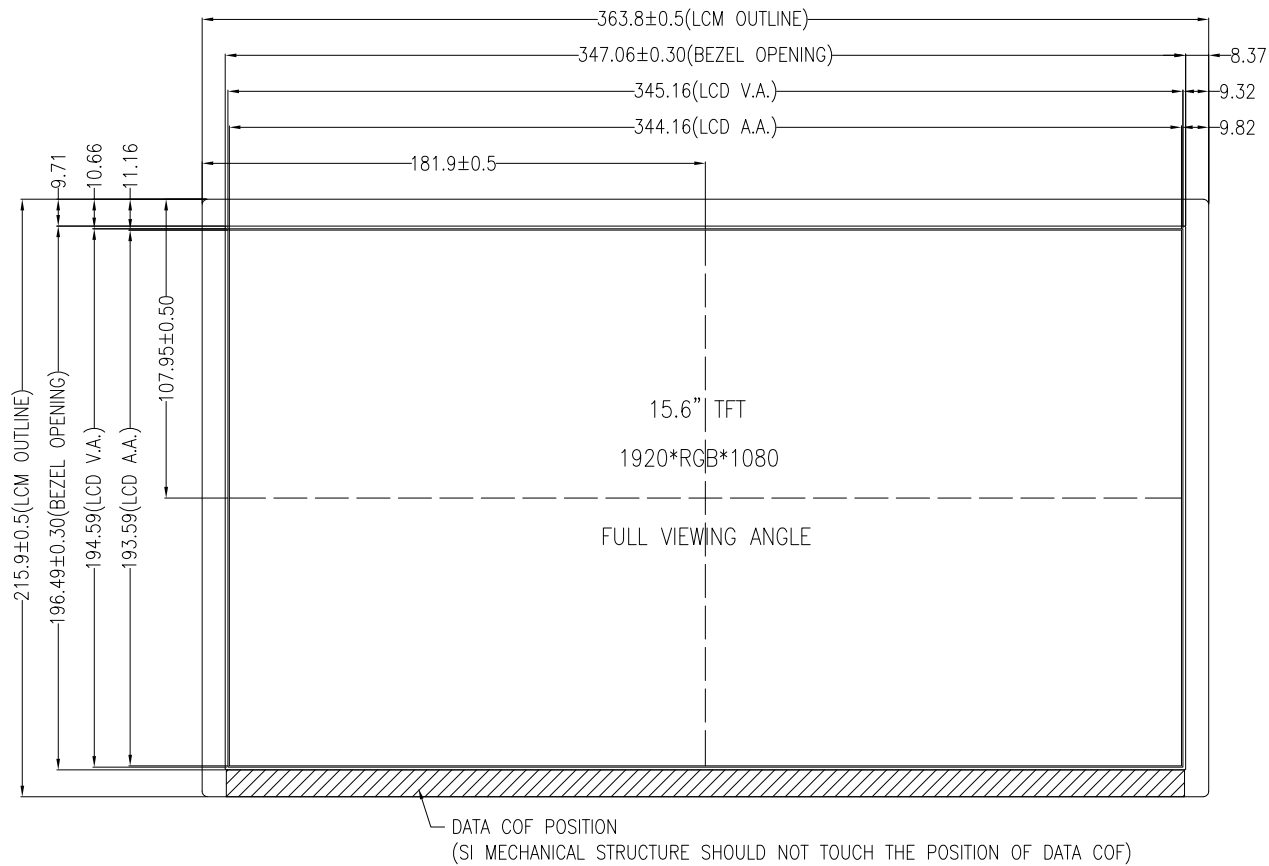


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VCC=5.0V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. OPERATING TEMP.: -30°C ~ 80°C
5. STORAGE TEMP.: -40°C ~ 90°C
6. BACKLIGHT TYPE: WHITE LED
BUILT-IN BACKLIGHT DRIVER: 12V
7. SURFACE LUMINANCE: 1200CD/M² (TYP.)
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE, HARD COATING(3H)
9. USER HOLE SCREW: M3
MAX. TORQUE: 2.5 KG-CM
MAX. DEPTH: 3.5MM
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

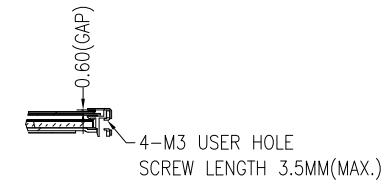


SECTION USER_HOLE-USER_HOLE



MULTI-INNO TECHNOLOGY CO., LTD.

01	FIRST ISSUE	CAROL	2024.06.29	APPROVED BY:	UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	SHEET NO.: 1/2	TFT MODULE

DRAWN BY:	CAROL	2024.06.29	SCALE : 1/1	MODULE P/N:
CHECKED BY:				MI1560AAT-2

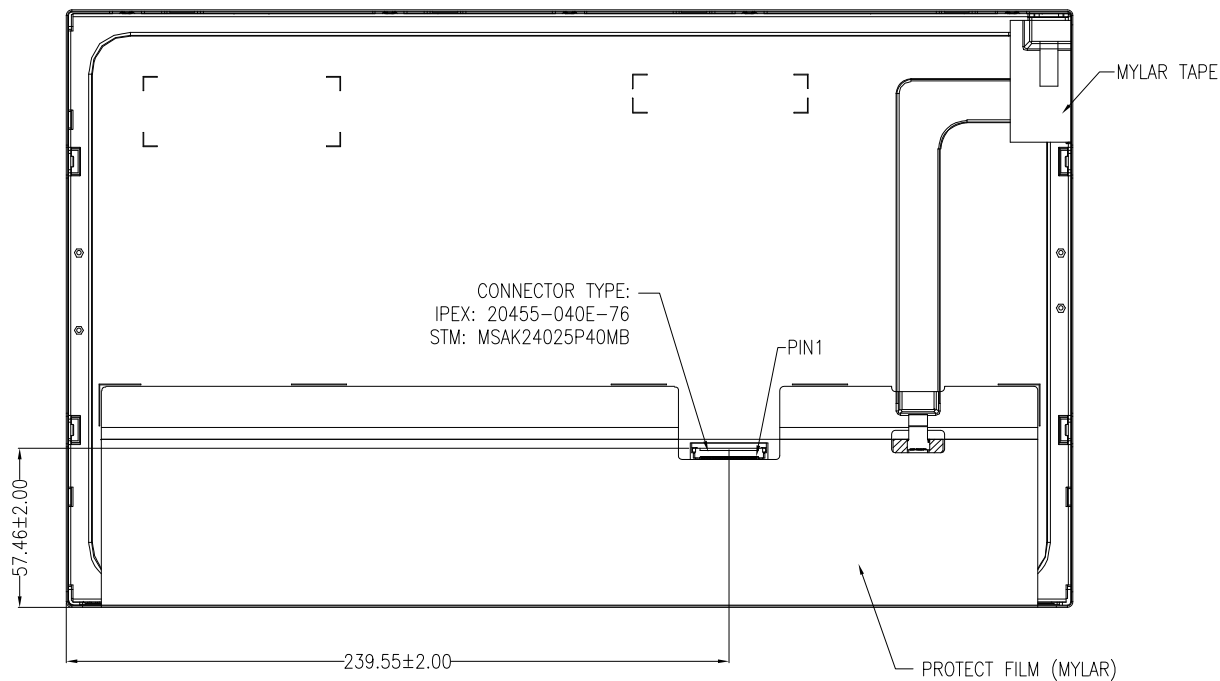

PIN DESCRIPTION			
PIN	SYMBOL	PIN	SYMBOL
1	VLED	21	RX01+
2	VLED	22	RX02-
3	VLED	23	RX02+
4	VLED	24	GND
5	GND	25	RX0C-
6	GND	26	RX0C+
7	GND	27	GND
8	GND	28	RX03-
9	LED_EN	29	RX03+
10	LED_PWM	30	RXE0-
11	VCC	31	RXE0+
12	VCC	32	RXE1-
13	VCC	33	RXE1+
14	NC	34	GND
15	NC	35	RXE2-
16	NC	36	RXE2+
17	REV_SCAN	37	RXEC-
18	RX00-	38	RXEC+
19	RX00+	39	RXE3-
20	RX01-	40	RXE3+



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2024.06.29		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1560AAT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2024.06.29
VER.	REVISED DESCRIPTION	REVISER	DATE