




TFT PIN DESCRIPTION	
PIN	NAME
1	NC
2	H-GND
3	LANE1-N
4	LANE1-P
5	H-GND
6	LANE0-N
7	LANE0-P
8	H-GND
9	AUX-CH-P
10	AUX-CH-N
11	H-GND
12	VCC
13	VCC
14	NC
15	LCD-GND
16	LCD-GND
17	HPD
18	BL-GND
19	BL-GND
20	BL-GND
21	BL-GND
22	BL-ENABLE
23	BL-PWM-DIM
24	NC
25	NC
26	VBL
27	VBL
28	VBL
29	VBL
30	NC

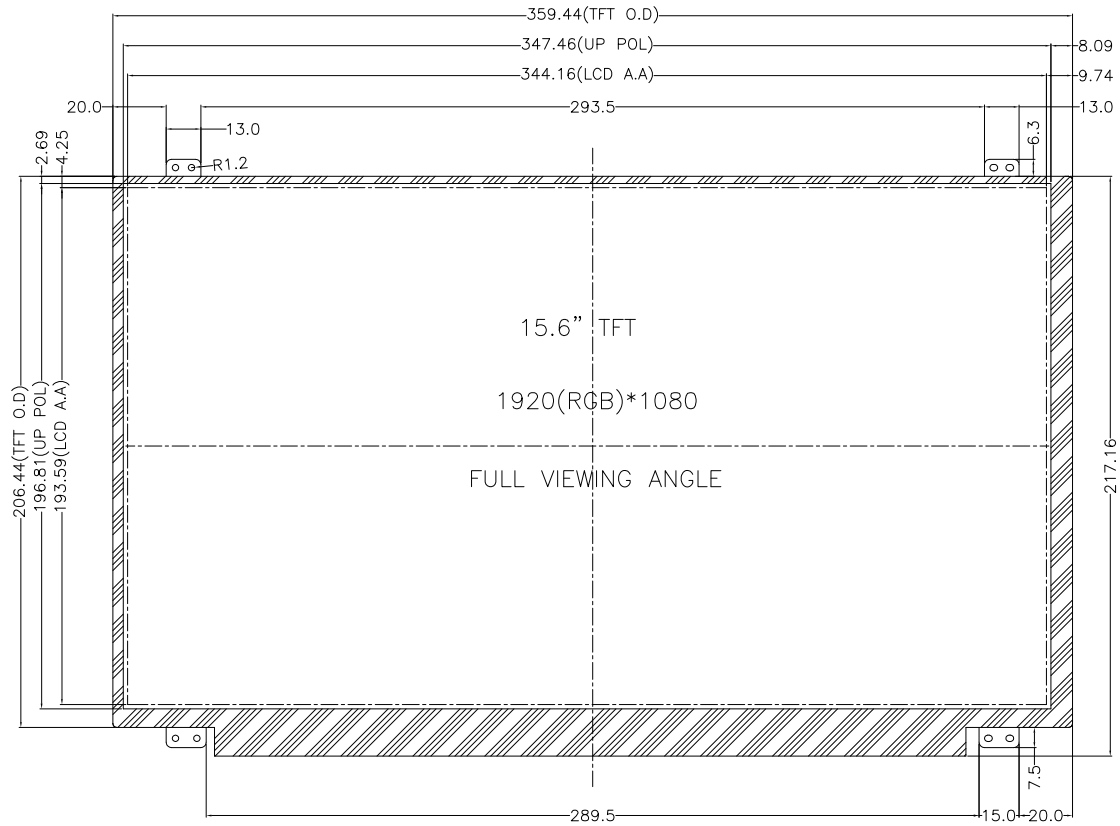

BACKLIGHT CIRCUIT DIAGRAM

NOTES:


1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK.
2. OPERATING VOLTAGE: VCC=3.3V
3. VIEWING DIRECTION: FULL VIEWING ANGLE.
4. IC DRIVER: TBD.
5. OPERATING TEMP: -10°C ~ 50°C.
6. STORAGE TEMP: -20°C ~ 60°C.
7. LED BACKLIGHT: 36-CHIP WHITE LED, If=80mA, Vf=24.3V-30.6V.
8. LCM SURFACE LUMINANCE: 400cd/m².
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE.
10. GENERAL TOLERANCE: ±0.5mm.
11. ROHS COMPLIANT.



MULTI-INNO TECHNOLOGY CO.,LTD.

VER.	REVISED DESCRIPTION	REVISER	DATE
03	CORRECT THE BACK VIEW	RITA	2019.12.03
02	ADD BLACK TAPE OF THE BACK OF PCBA	RITA	2019.11.22
01	FIRST ISSUE	CAROL	2019.06.05

DRAWN BY:	CAROL 2019.06.05	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT: MM	MI1560IT-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	03		TFT MODULE

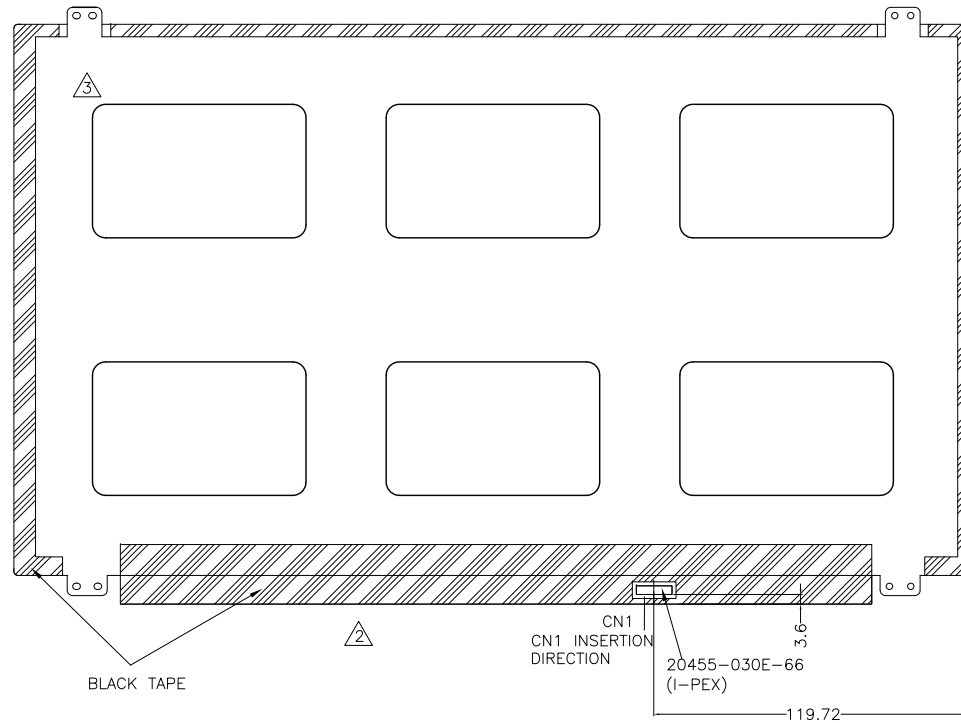

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL 2019.06.05	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT: MM	MI1560IT-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	03		TFT MODULE

VER.	REVISED DESCRIPTION	REVISER	DATE
03	CORRECT THE BACK VIEW	RITA	2019.12.03
02	ADD BLACK TAPE OF THE BACK OF PCBA	RITA	2019.11.22
01	FIRST ISSUE	CAROL	2019.06.05