



PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	NC
2	GND
3	LANE1(N)
4	LANE1(P)
5	GND
6	LANE0(N)
7	LANE0(P)
8	GND
9	AUX_CH(P)
10	AUX_CH(N)
11	GND
12	LCD_VCC
13	LCD_VCC
14	NC
15	GND
16	GND
17	HPD
18	GND
19	GND
20	GND
21	GND
22	BL_ENABLE
23	BL_PWM_DIM
24	NC
25	NC
26	BL_PWR
27	BL_PWR
28	BL_PWR
29	BL_PWR
30	NC

NOTES:


1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: LCD_VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: TC2055G3PUR09UT-G0-I
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: 54-CHIP WHITE LED
BUILT-IN BACKLIGHT DRIVER: BL_PWR=12.0V
8. SURFACE LUMINANCE: 260CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. INTERFACE TYPE: EDP
11. GENERAL TOLERANCE: ±0.5MM
12. ROHS COMPLIANT



PIXEL DETAIL

 MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL	2023.02.16	MODULE P/N:
CHECKED BY:			MI1560QT-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	01		TFT MODULE
		UNIT: mm	
		SHEET NO.: 1/2	

01	FIRST ISSUE	CAROL	2023.02.16
VER.	REVISED DESCRIPTION	REVISER	DATE

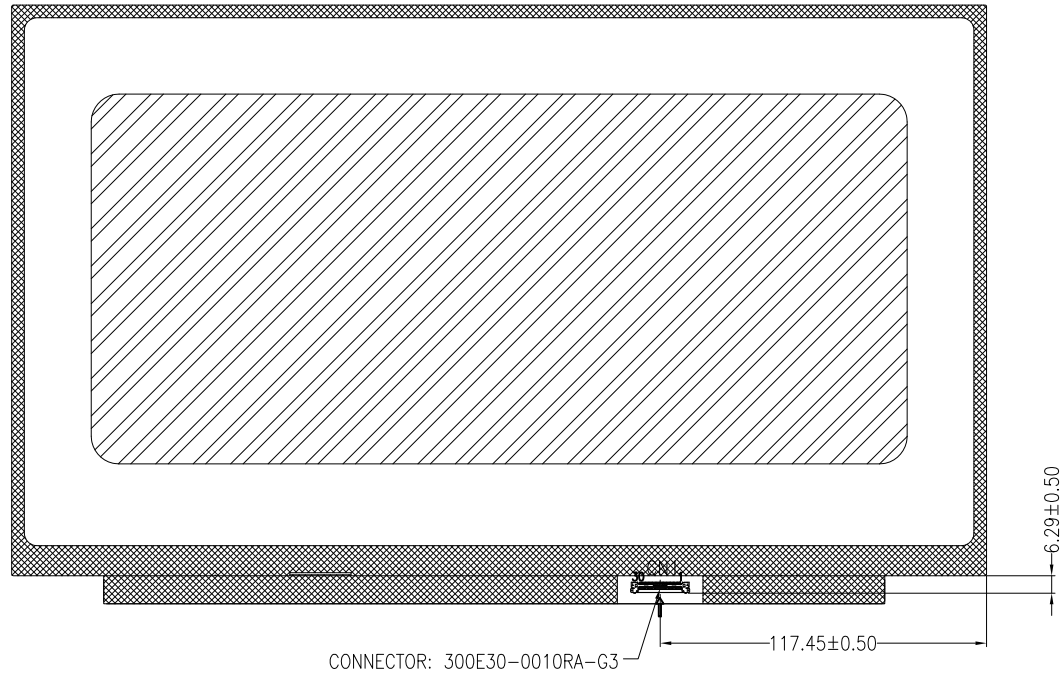

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.02.16		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1560QT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2023.02.16
VER.	REVISED DESCRIPTION	REVISER	DATE