
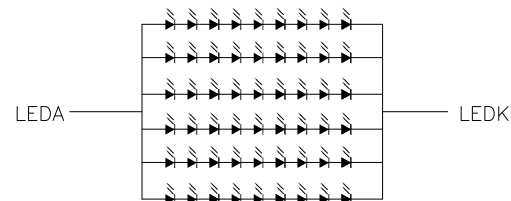


PIN ASSIGNMENT FOR CN1	
PIN	SYMBOL
1	NC
2	GND
3	LANE1(N)
4	LANE1(P)
5	GND
6	LANE0(N)
7	LANE0(P)
8	GND
9	AUX_CH(P)
10	AUX_CH(N)
11	GND
12	LCD_VCC
13	LCD_VCC
14	NC
15	GND
16	GND
17	HPD
18	GND
19	GND
20	GND
21	GND
22	NC
23	NC
24	NC
25	NC
26	NC
27	NC
28	NC
29	NC
30	NC

PIN ASSIGNMENT FOR CN2	
PIN	SYMBOL
1	LEDA (RED WIRE)
2	LEDK (WHITE WIRE)

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: LCD_VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: HX8036-A52
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, IF=240MA, VF=25.2V~30.6V
8. SURFACE LUMINANCE: 500CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. INTERFACE TYPE: EDP
11. GENERAL TOLERANCE: ±0.5MM
12. ROHS COMPLIANT




BACKLIGHT CIRCUIT DIAGRAM



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2023.06.30		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1560RT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	RITA	2023.06.30
VER.	REVISED DESCRIPTION	REVISER	DATE

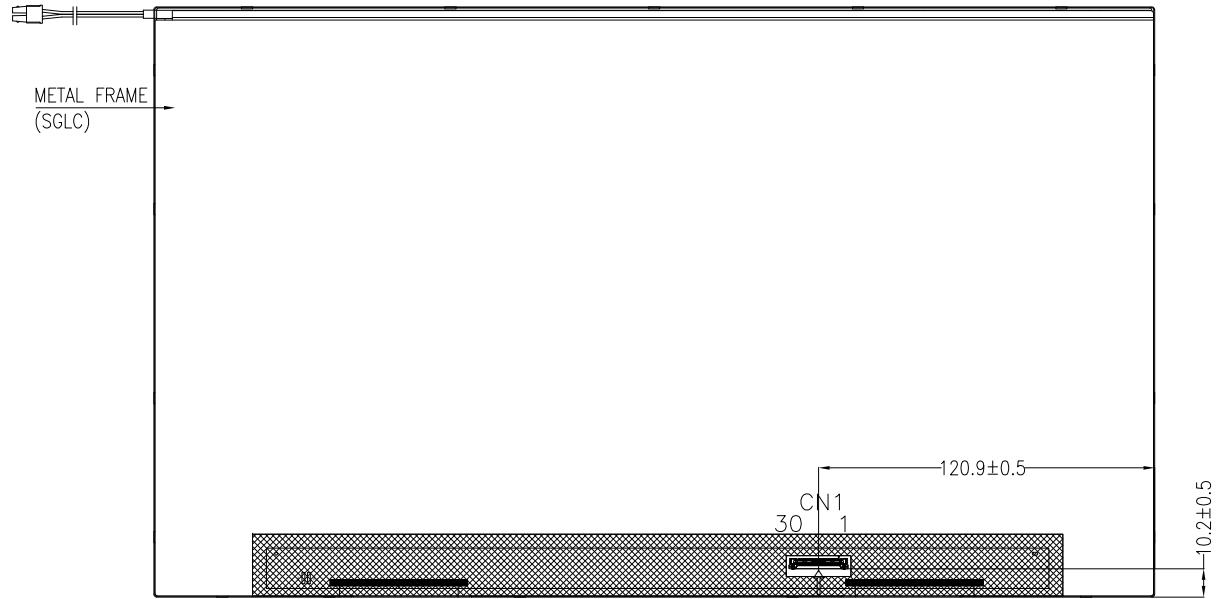

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2023.06.30		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1560RT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	RITA	2023.06.30
VER.	REVISED DESCRIPTION	REVISER	DATE