

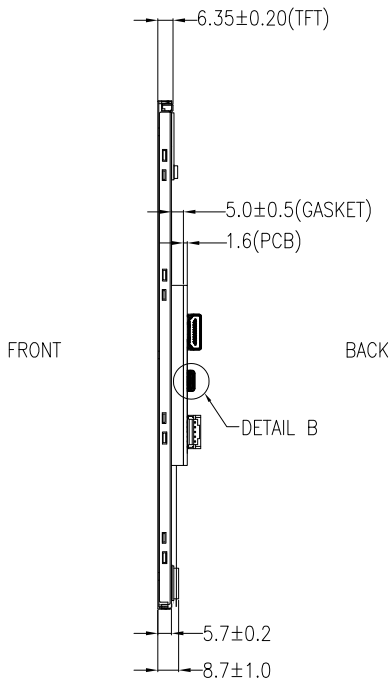


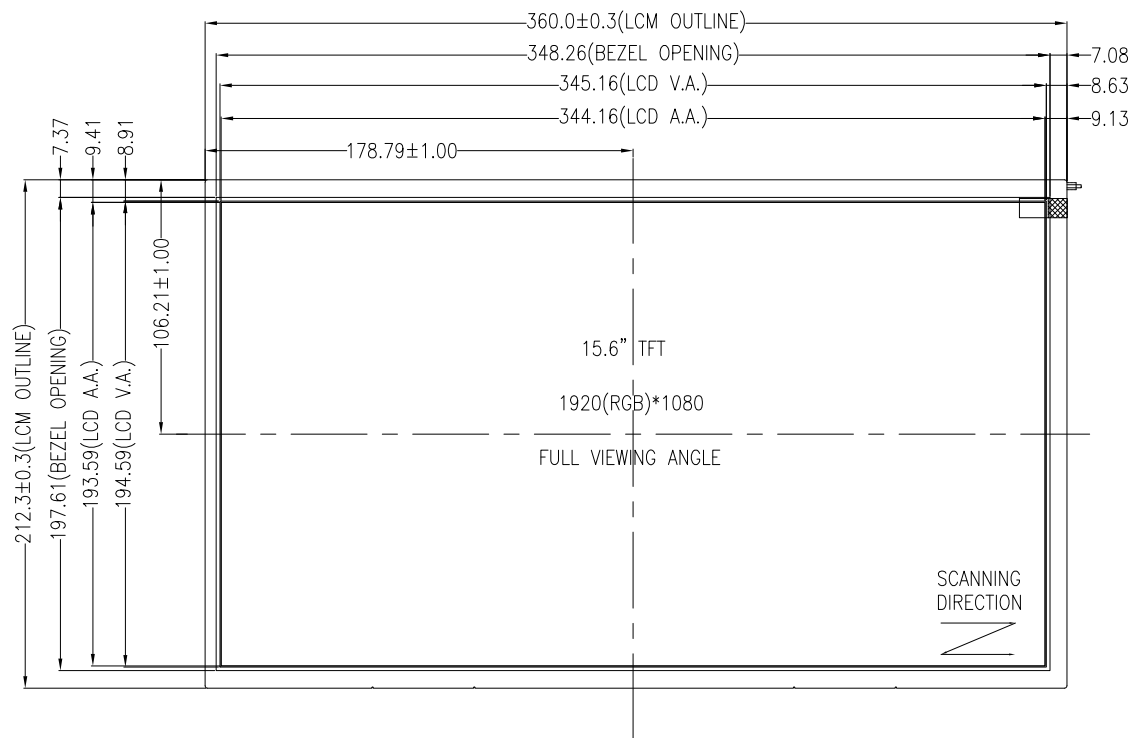


NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE(CN1): 12V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: RTD2556T
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
8. SURFACE LUMINANCE: 1000CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
11. GENERAL TOLERANCE: ±0.5MM
12. ROHS COMPLIANT



PIXEL DETAIL
(SCALE 40:1)



DETAIL B
(SCALE 4:1)



MULTI-INNO TECHNOLOGY CO., LTD.

02	MODIFY SURFACE LUMINANCE FROM 800NITS TO 1000NITS	CAROL	2025.08.12	CHECKED BY:	RITA		MODULE P/N:
01	FIRST ISSUE	RITA	2024.07.02	APPROVED BY:		SCALE : 1/1	MI1560RT-2-HB
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	02	UNIT: mm	DESCRIPTION:
						SHEET NO: 1/2	TFT + HDMI BOARD

