




PIN ASSIGNMENT FOR CN1 (HDMI INPUT)			
PIN	SYMBOL		
1	TMDS DATA 2+		
2	TMDS DATA 2 SHIELD		
3	TMDS DATA 2-		
4	TMDS DATA 1+		
5	TMDS DATA 1 SHIELD		
6	TMDS DATA 1-		
7	TMDS DATA 0+		
8	TMDS DATA 0 SHIELD		
9	TMDS DATA 0-		
10	TMDS CLOCK+		
11	TMDS CLOCK SHIELD		
12	TMDS CLOCK-		
13	CEC		
14	RESERVED(N.C. ON DEVICE)		
15	SCL		
16	SDA		
17	DDC/CEC GROUND		
18	+5V POWER		
19	HOT PLUG DETECT		
PIN ASSIGNMENT FOR CN2 (TYPE-C USB INPUT)			
PIN	SYMBOL	PIN	SYMBOL
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	NC	B8	NC
A6	D+	B7	D-
A7	D-	B6	D+
A8	NC	B5	NC
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN ASSIGNMENT FOR CN3 (POWER SUPPLY AND BACKLIGHT BRIGHTNESS ADJUSTING)			
PIN	SYMBOL		
1	VCC(+12V)		
2	GND		
3	GND		
4	BL_PWM		
5	BL_EN		
PIN ASSIGNMENT FOR CN7 AND CN8			
PIN	SYMBOL		
1	VDD		
2	VSS		
3	SDA		
4	SCL		
5	INT		
6	RST		

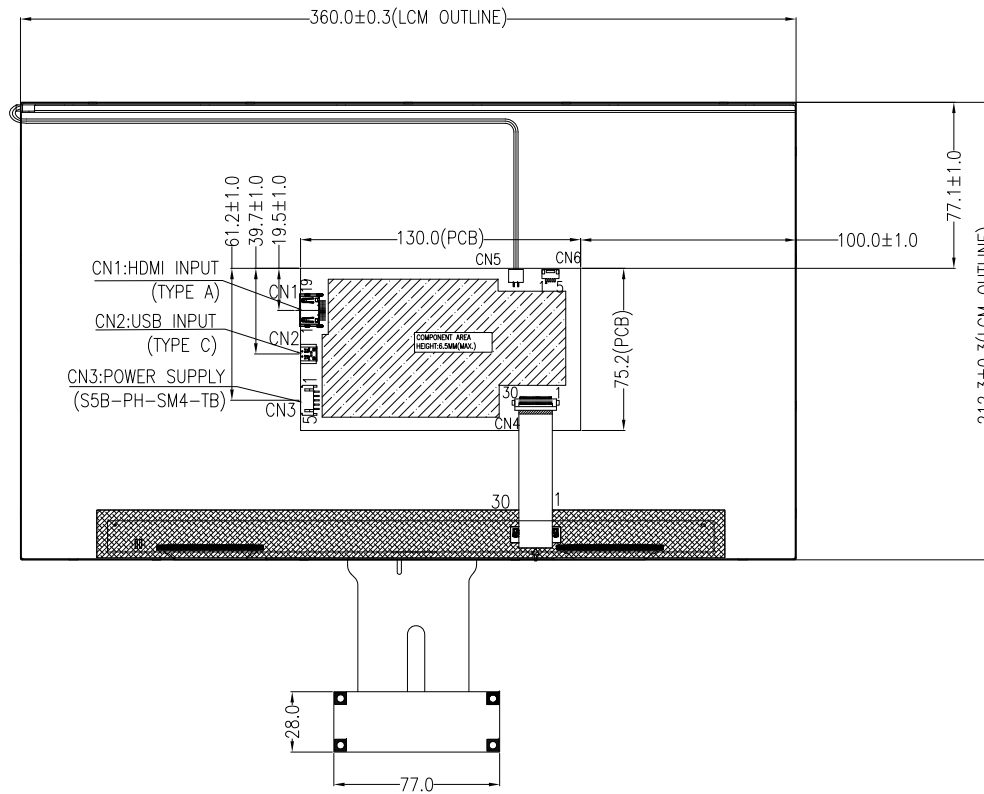

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA	2024.06.21		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1560RT-2CP2-A-HB
APPROVED BY:			UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:
01	FIRST ISSUE	RITA	2025.01.09	02
			SHEET NO.: 2/2	TFT + CTP + HDMI BOARD