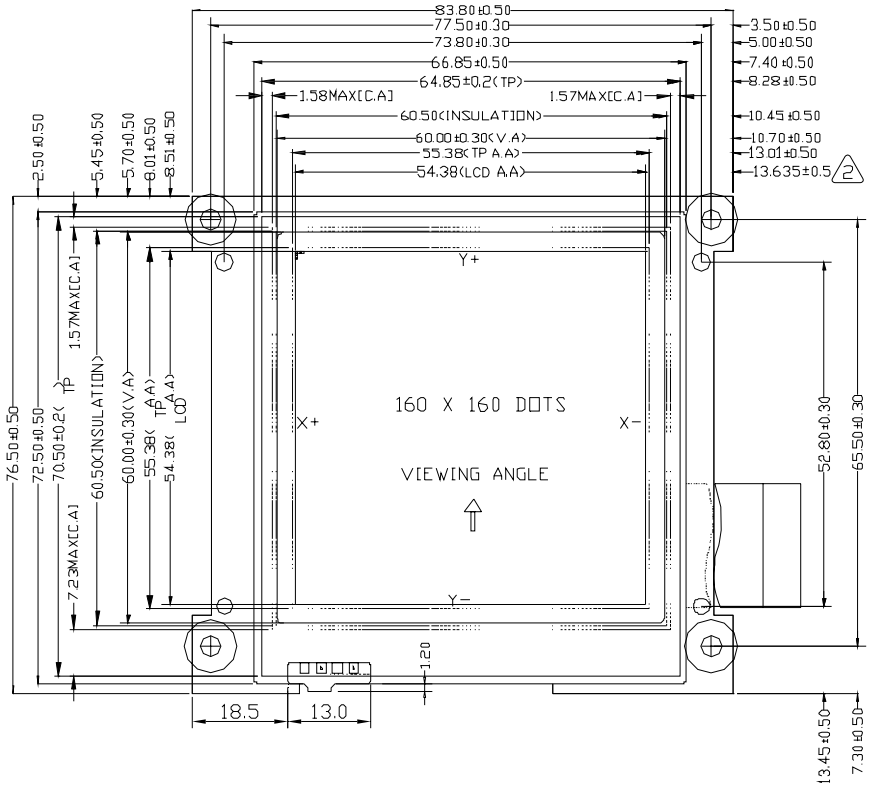

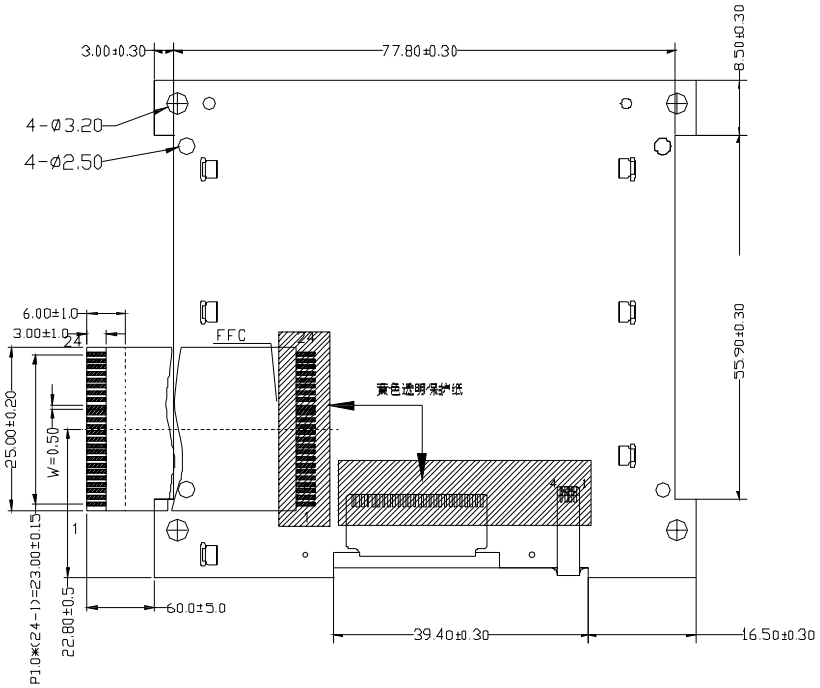

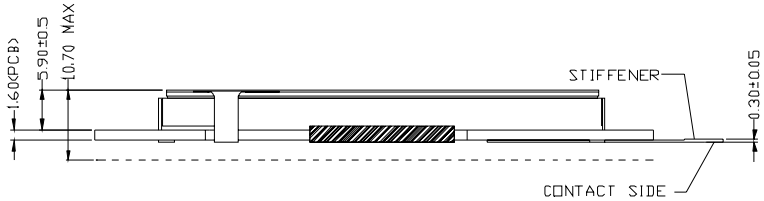

NOTES:

1. DISPLAY TYPE: FSTN,POSITIVE,TRANSFLECTIVE.
2. 1/160 DUTY,1/10 BAIS,VLCD=16.5V,VDD=3.3V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. IC DRIVER: UC1698U(COG).
5. OPERATING TEMP: −10°C ~ 60°C.
6. STORAGE TEMP: −20°C ~ 70°C.
7. LED BACKLIGHT: WHITE LED, IF=50~70mA,VF=4.7±0.5V.
8. CONNECTOR:1057S24U(LEOCO)
9. GENERAL TOLERANCE: ±0.2.
10. RoHS COMPLIANT.

VER.	REVISED DESCRIPTION	DATE
02	Modify is the display area AA position	2015.10.28
01	First issue	2015.10.21

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	CAROL 2015.10.28	SCALE : 1/1	MODULE P/N: MI160160M
CHECKED BY:		UNIT: mm	
APPROVED BY:			DESCRIPTION: GRAPHIC MODULE
VERSION NO:	02		