


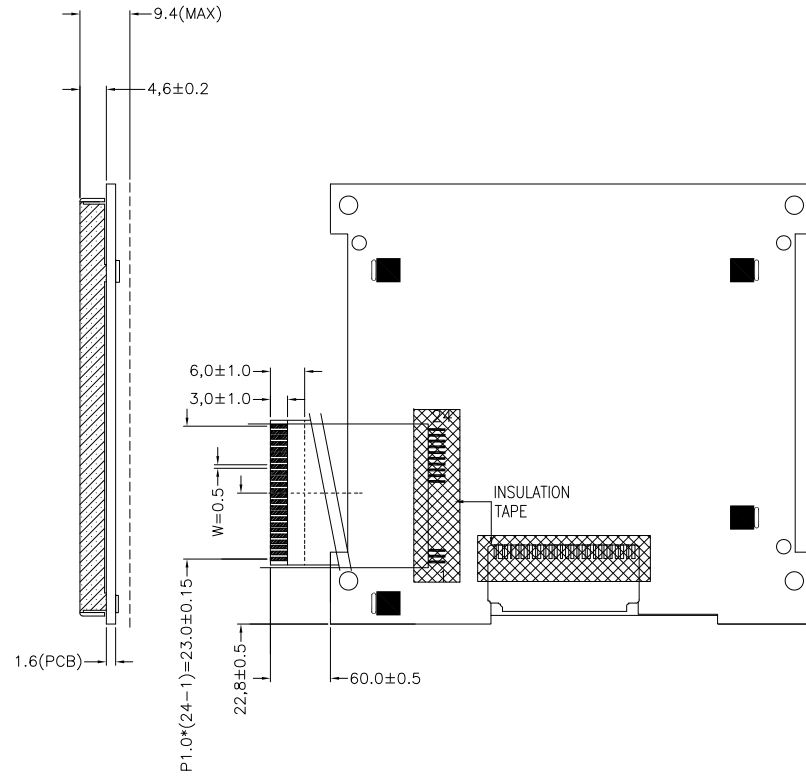



LCM PIN ASSIGNMENT	
PIN	SYMBOL
1	VSS
2	A0
3	WR
4	RD
5	CS
6	RST
7	VDD
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	NC
17	NC
18	NC
19	NC
20	NC
21	NC
22	K
23	A
24	VSS

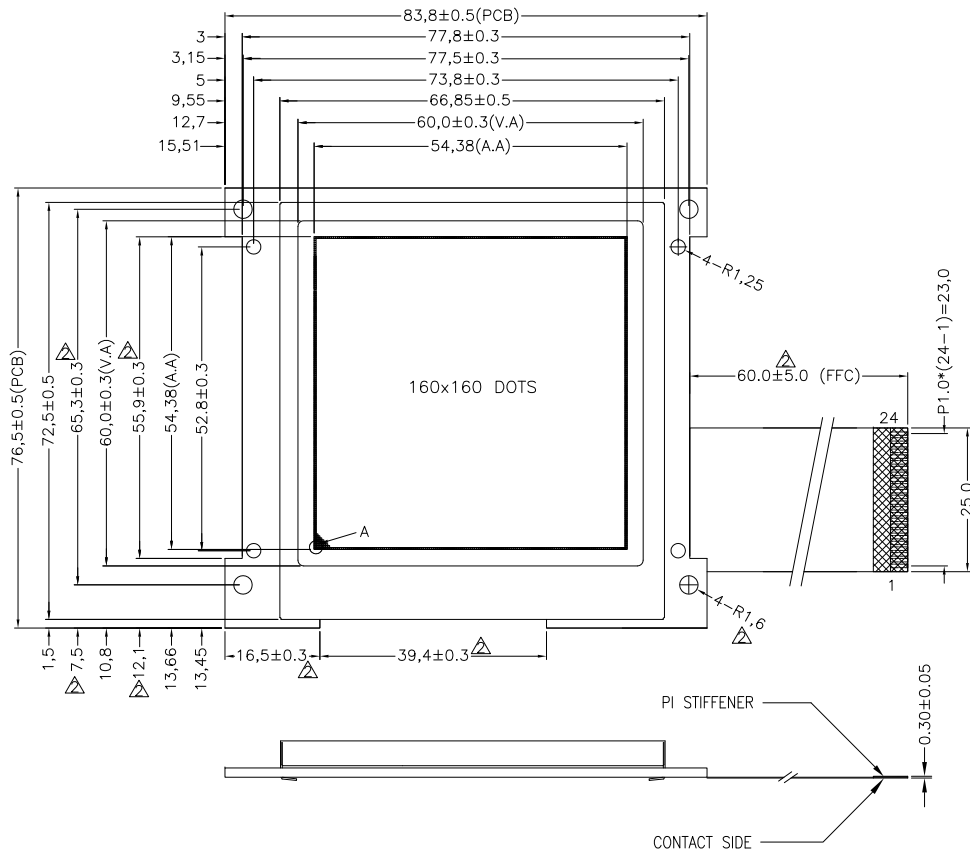

NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLECTIVE, POSITIVE.
2. OPERATING VOLTAGE: VDD=3.3V, VLCD=16.5V.
3. VIEWING DIRECTION: 6:00 O'CLOCK.
4. DRIVE METHOD: 1/160 DUTY, 1/10 BIAS.
5. DRIVER IC: UC1698U (COC) OR COMPATIBLE.
6. OPERATING TEMP.: -10°C ~ 60°C.
7. STORAGE TEMP.: -20°C ~ 70°C.
8. BACKLIGHT: WHITE LED, IF=50~70mA, VF=4.7V±0.5V.
9. CONNECTOR: 1057S24U (LEOCO).
10. GENERAL TOLERANCE: ±0.2MM.
11. ROHS COMPLIANT.

 MULTI-INNO TECHNOLOGY CO.,LTD.			
DRAWN BY:	RITA	2020.08.06	MODULE P/N:
CHECKED BY:			MI160160M-1
APPROVED BY:			DESCRIPTION:
VERSION NO:	02		GRAPHIC MODULE
REVISOR	DATE	SCALE : 1/1	UNIT: mm
		SHEET NO.: 1/1	

02	CORRECT THE LENGTH OF FFC. CORRECT SOME DIMENSIONS OF PCB.	RITA	2020.09.15
01	FIRST ISSUE	RITA	2020.08.06
VER.	REVISED DESCRIPTION	REVISOR	DATE