



Pin	Symbol
1	C1N
2	C1P
3	C2P
4	C2N
5	VDD2
6	IREF
7	VCOMH
8	VPP
9	VSL
10	VCC
11	VDD1
12	GPIO
13	IM0
14	IM1
15	IM2
16	V1 OPT
17	GND
18	FT0
19	FT1
20	VPPS
21	GND
22	CSB
23	RESB
24	RS
25	WRB
26	RDB
27	D0
28	D1
29	D2
30	D3
31	D4
32	D5
33	D6
34	D7
35	GND



Detail "A"  
Scale (2:1)

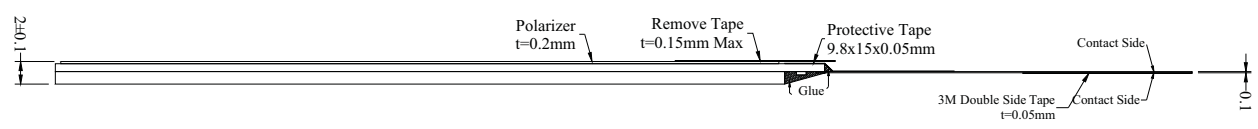

Notes:

1. Color: Yellow
2. Driver IC: KS0066 equivalent
3. Interface: 4-/8-bit 68XX/80XX Parallel, SPI, I2C
4. General Tolerance:  $\pm 0.30$
5. The total thickness (2.10 Max) is without polarizer protective film & remove tape. The actual assembled total thickness with above materials should be 2.35 Max.

VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	CAROL	2019.04.30

**MULTI-INNO TECHNOLOGY CO., LTD.**

DRAWN BY:	CAROL 2019.04.30	SCALE : 1/1	MODULE P/N:
CHECKED BY:		UNIT:	MI1601A0-Y
APPROVED BY:		mm	DESCRIPTION:
VERSION NO:	01		OLED MODULE