

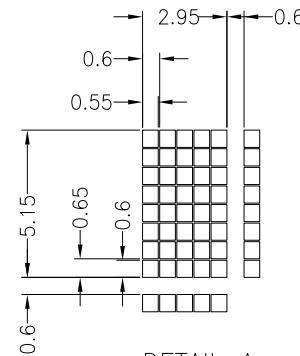


PIN DESCRIPTION	
PIN	SYMBOL
1	V0
2	VDD
3	VSS
4	DB7
5	DB6
6	DB5
7	DB4
8	E
9	RW
10	RS

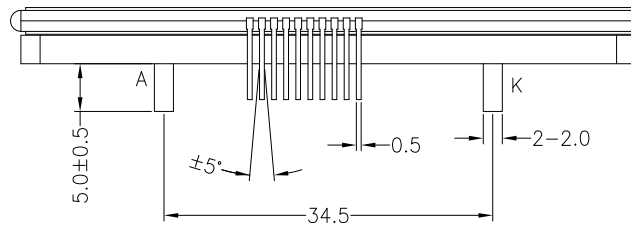

DETAIL A
SCALE 3:1



NOTE:

1. CHARACTERS: 16x2 LINES
2. DISPLAY TYPE: FSTN / TRANFLECTIVE / POSITIVE
3. OPERATING VOLTAGE: VDD=3.0V(TYP.), VOP=4.5V(TYP.)
4. VIEWING DIRECTION: 6 O'CLOCK
5. DRIVER IC: UC17032C
6. INTERFACE: 4-BIT PARALLEL
7. DRIVE METHOD: 1/16DUTY, 1/5 BIAS
8. CONNECTOR: PIN TYPE
9. OPERATING TEMP.: -20°C ~ 70°C
10. STORAGE TEMP.: -30°C ~ 80°C
11. LED BACKLIGHT: 3-CHIP WHITE LED, If=45mA, Vf=3.0V(TYP.)
12. GENERAL TOLERANCE: ±0.2MM
13. ROHS COMPLIANT

01	FIRST ISSUE	CAROL	2020.08.20
VER.	REVISED DESCRIPTION	REVISER	DATE

MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	CAROL	2020.08.20	MODULE P/N: MI1602BI-G-2
CHECKED BY:			
APPROVED BY:			DESCRIPTION: CHARACTERS MODULE
VERSION NO:	01		
		SCALE : 1/1	UNIT: mm
		SHEET NO.: 1/1	