
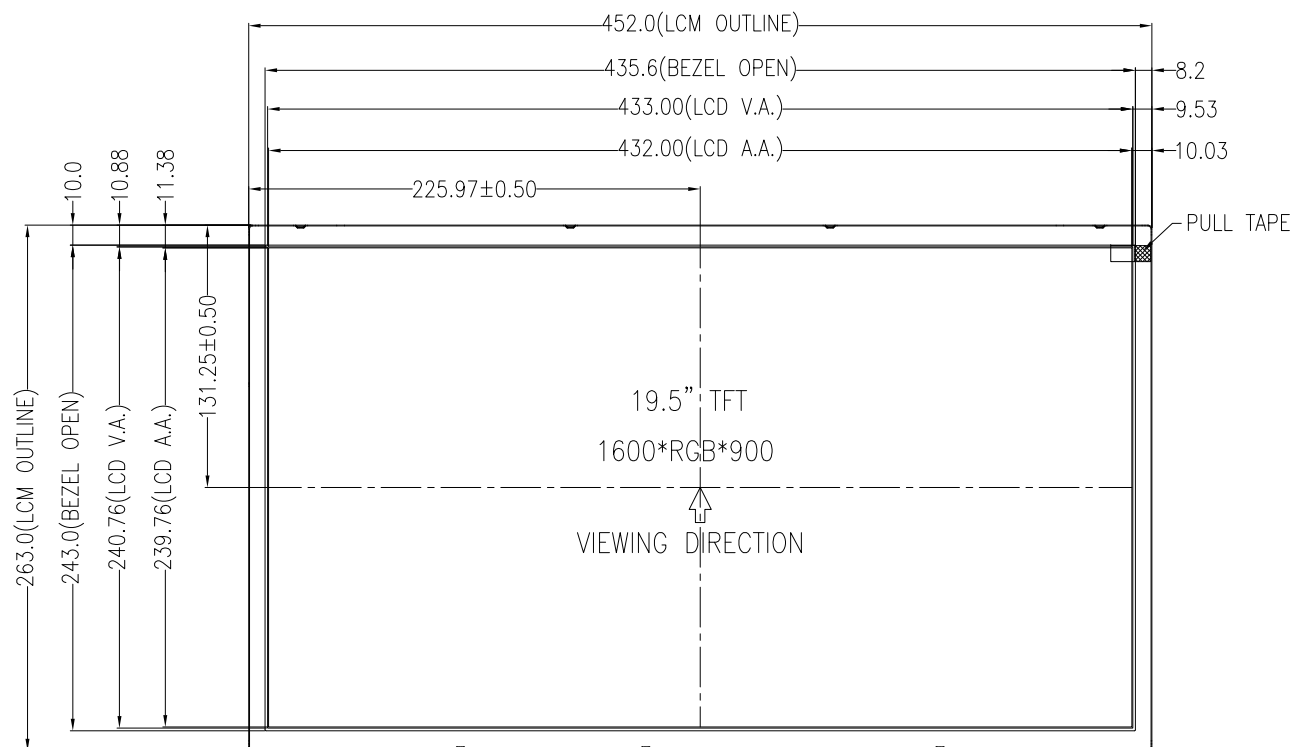
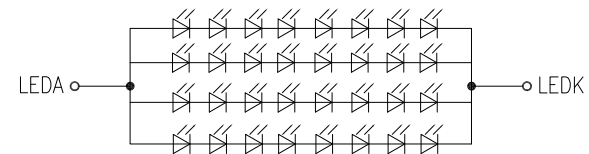


PIXEL DETAIL
(SCALE 100:1)

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY WHITE
2. OPERATING VOLTAGE: VCC=5.0V (TYP.)
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVER IC: -
5. OPERATING TEMP.: 0°C ~ 50°C
6. STORAGE TEMP.: -20°C ~ 60°C
7. LED BACKLIGHT: WHITE LED, IF=240mA, VF=22.4V~27.2V
8. SURFACE LUMINANCE: 300CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT

01	FIRST ISSUE	CAROL	2024.10.15	APPROVED BY:		UNIT: mm	DESCRIPTION: TFT MODULE
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	01	SHEET NO.: 1/2	

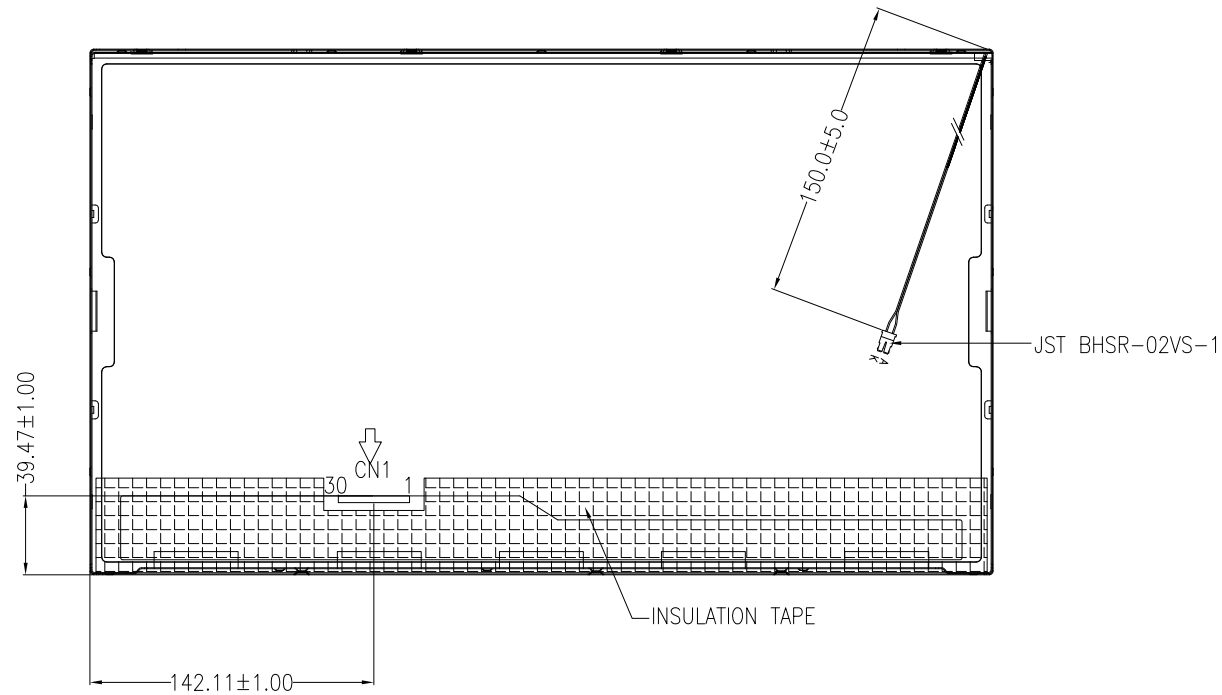

BACKLIGHT CIRCUIT DIAGRAM



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2024.10.15		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI1950AT-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2024.10.15
VER.	REVISED DESCRIPTION	REVISER	DATE