

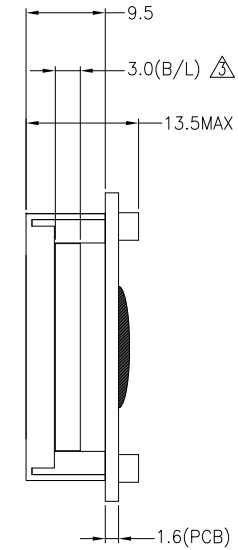


PIN ASSIGNMENT	
NO.	SYMBOL
1	VSS
2	VDD
3	VO
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LEDA
16	LEDK

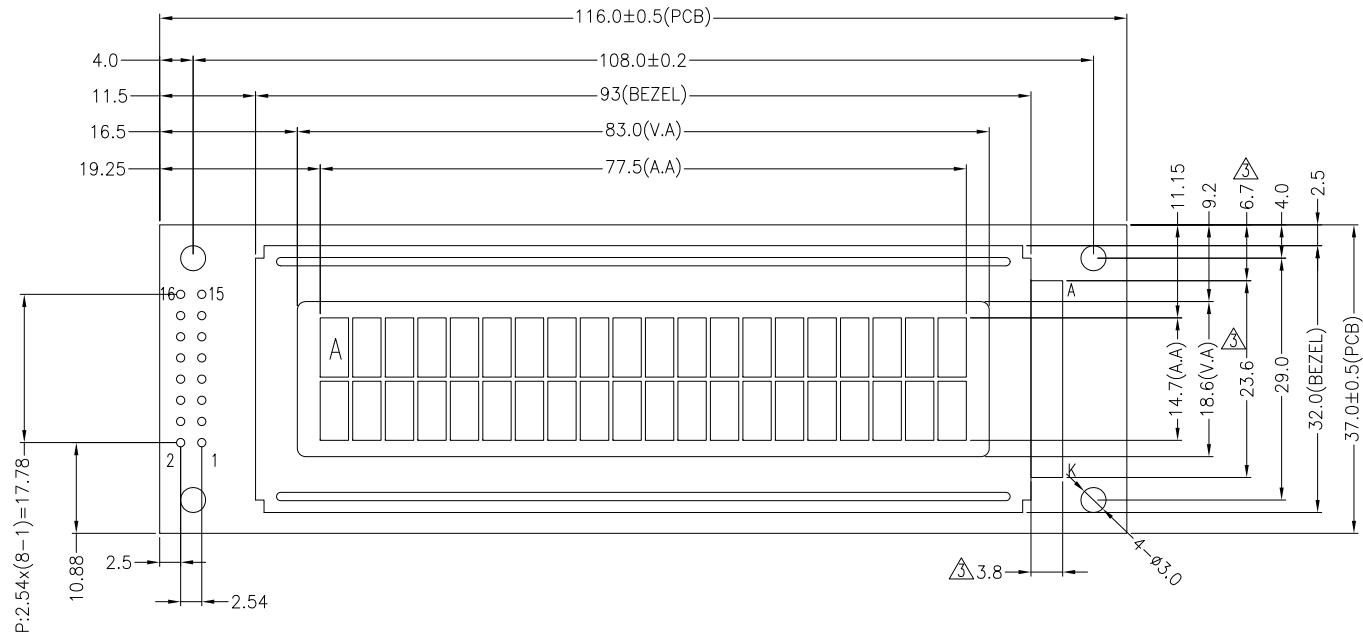

DETAIL A:
(SCALE: 2:1)

△ NOTES:

1. DISPLAY TYPE: STN/BLUE MODE.
2. VIEWING DIRECTION: 6:00 O'CLOCK.
3. POLARIZER MODE: TRANSMISSIVE / NEGATIVE.
4. DRIVE METHOD: 1/16 DUTY 1/5 BIAS.
5. LCD OPERATING VOLTAGE: 4.7V.
6. OPERATING TEMP.: -20°C~+70°C.
7. STORAGE TEMP.: -30°C~+80°C.
8. CONTROLLER: SPLC780D.
9. BACKLIGHT: WHITE LED.
10. BEZEL SURFACE TREATMENT: PAINT COATING (BLACK).
11. ALL UNMARKED TOLERANCES:±0.3mm
12. RoHS COMPLIANT

		MULTI-INNO TECHNOLOGY CO.,LTD.		DRAWN BY:	CAROL	2015.07.02	SCALE : 1/1	MODULE P/N:
				CHECKED BY:			UNIT:	MI2002M3
VER.		REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	03	mm	DESCRIPTION:
03	ADD NOTES. ADD BACKLIGHT PART SIZE.		CAROL	2020.06.08			⊕	CHARACTER MODULE
02	ADD PINOUT DEFINITION.		RITA	2017.06.08				
01	FIRST ISSUE		CAROL	2015.07.02				