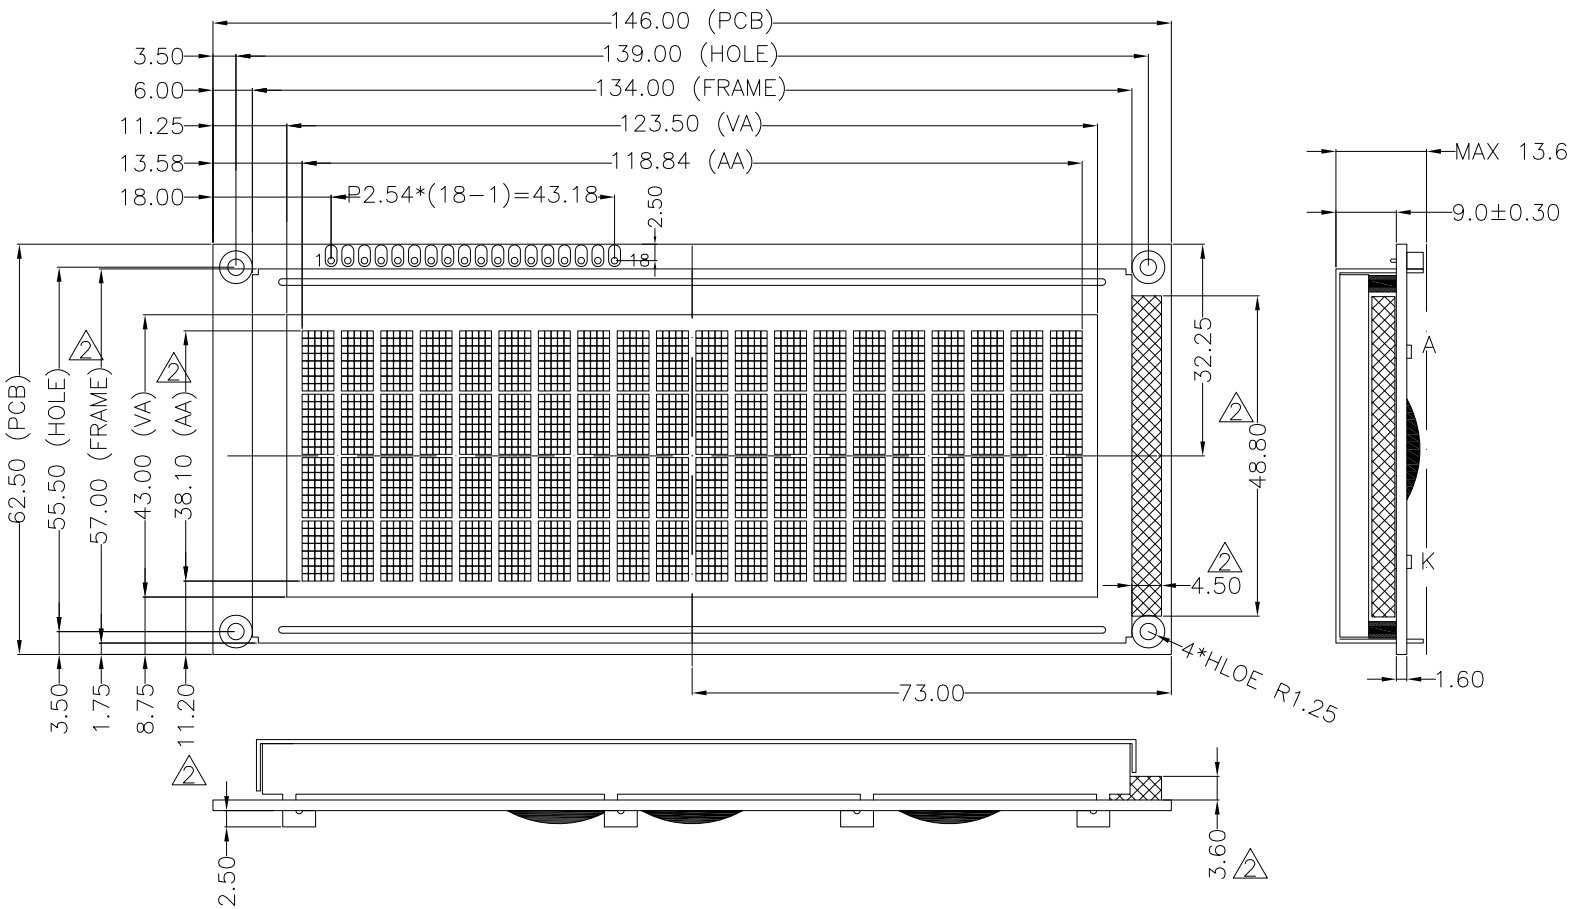

PIN ASSIGNMENT	
NO.	SYMBOL
1	VSS
2	VDD
3	V0
4	RS
5	R/W
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	A
16	K
17	NC
18	NC

NOTES:

1. DISPLAY TYPE: STN POSITIVE, YELLOW GREEN, TRANSFLECTIVE.
2. DRIVE METHOD: 1/16DUTY, 1/5BAIS, VDD=5.0V, VOP=4.7V.
3. VIEWING DIRECTION: 6 O'CLOCK.
4. DRIVER IC: RW1603.
5. OPERATING TEMP.: −20°C ~ 70°C.
6. STORAGE TEMP.: −30°C ~ 80°C.
7. BACKLIGHT TYPE: YELLOW GREEN LED.
8. GENERAL TOLERANCE: ±0.3mm.
9. ROHS COMPLIANT.

VER.	REVISED DESCRIPTION	REVISER	DATE
02	ADD DIMENSIONS OF BACKLIGHT CORRECT THE DIMENSION OF AA.	RITA	2019.05.12
01	FIRST ISSUE	RITA	2017.02.27

MULTI−INNO TECHNOLOGY CO.,LTD.

DRAWN BY: RITA 20170227	SCALE : 1/1	MODULE P/N: MI2004Q	
CHECKED BY:	UNIT: MM		
APPROVED BY:		DESCRIPTION: CHARACTER MODULE	
VERSION NO: 02			