



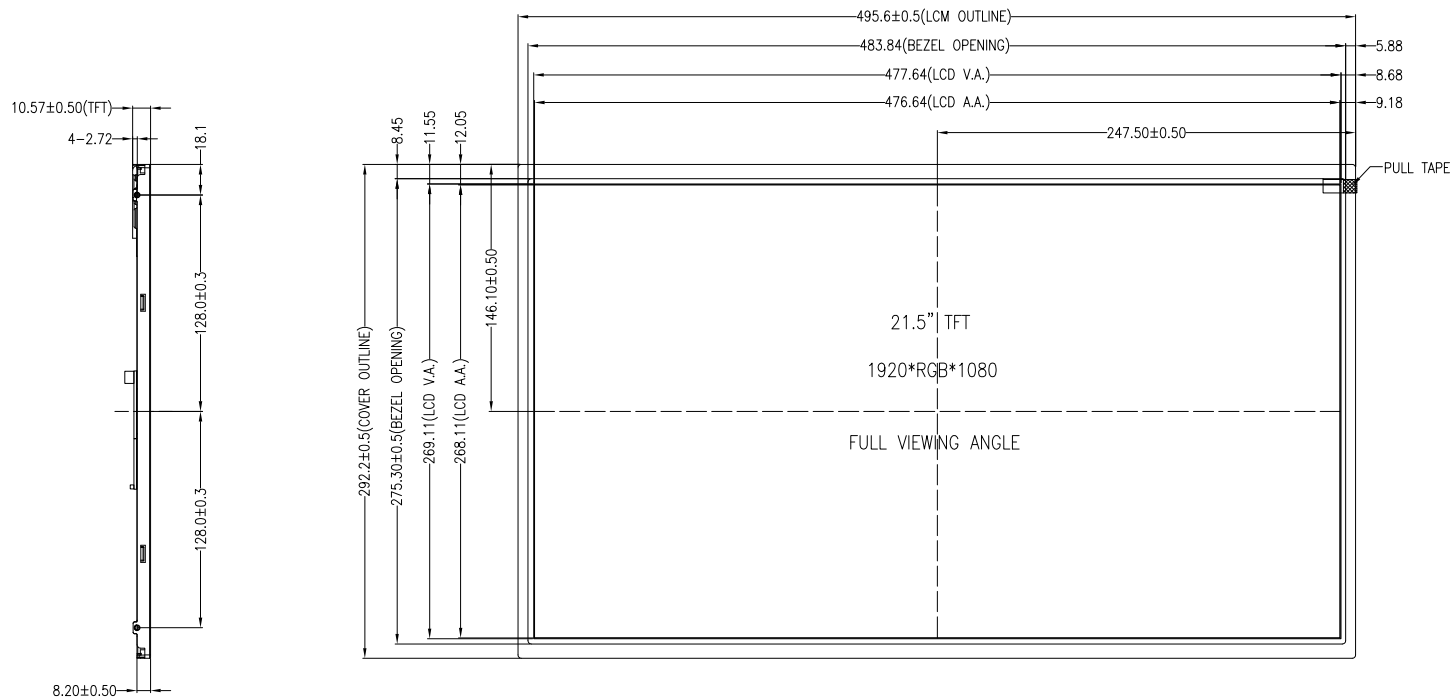

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=5.0V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. DRIVER IC: -
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VLED=12V
8. SURFACE LUMINANCE: 1000 CD/M² (TYP.)
9. TOP POLARIZER SURFACE TREATMENT: HAZE 25%, 3H
10. GENERAL TOLERANCE: ±0.5MM
11. ROHS COMPLIANT



PIXEL DETAIL
(SCALE 200:1)

PIN DESCRIPTION FOR CN1	
PIN	SYMBOL
1	RX00-
2	RX00+
3	RX01-
4	RX01+
5	RX02-
6	RX02+
7	GND
8	RX0C-
9	RX0C+
10	RX03-
11	RX03+
12	RXE0-
13	RXE0+
14	GND
15	RXE1-
16	RXE1+
17	GND
18	RXE2-
19	RXE2+
20	RXEC-
21	RXEC+
22	RXE3-
23	RXE3+
24	GND
25	NC
26	NC
27	NC
28	VDD
29	VDD
30	VDD


PIN DESCRIPTION FOR CN2	
PIN	SYMBOL
1	VLED
2	VLED
3	ON/OFF
4	ADJ
5	GND
6	GND



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.02.23		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI2150CT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/2	TFT MODULE

01	FIRST ISSUE	CAROL	2023.02.23
VER.	REVISED DESCRIPTION	REVISER	DATE

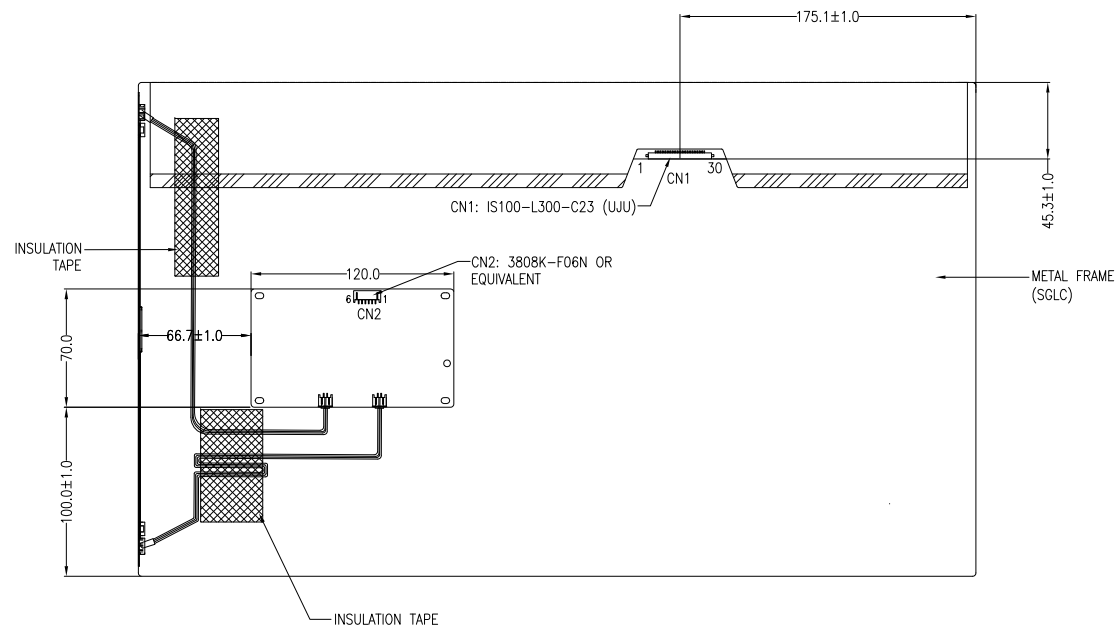

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL	2023.02.23		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI2150CT-2
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 2/2	TFT MODULE

01	FIRST ISSUE	CAROL	2023.02.23
VER.	REVISED DESCRIPTION	REVISER	DATE