



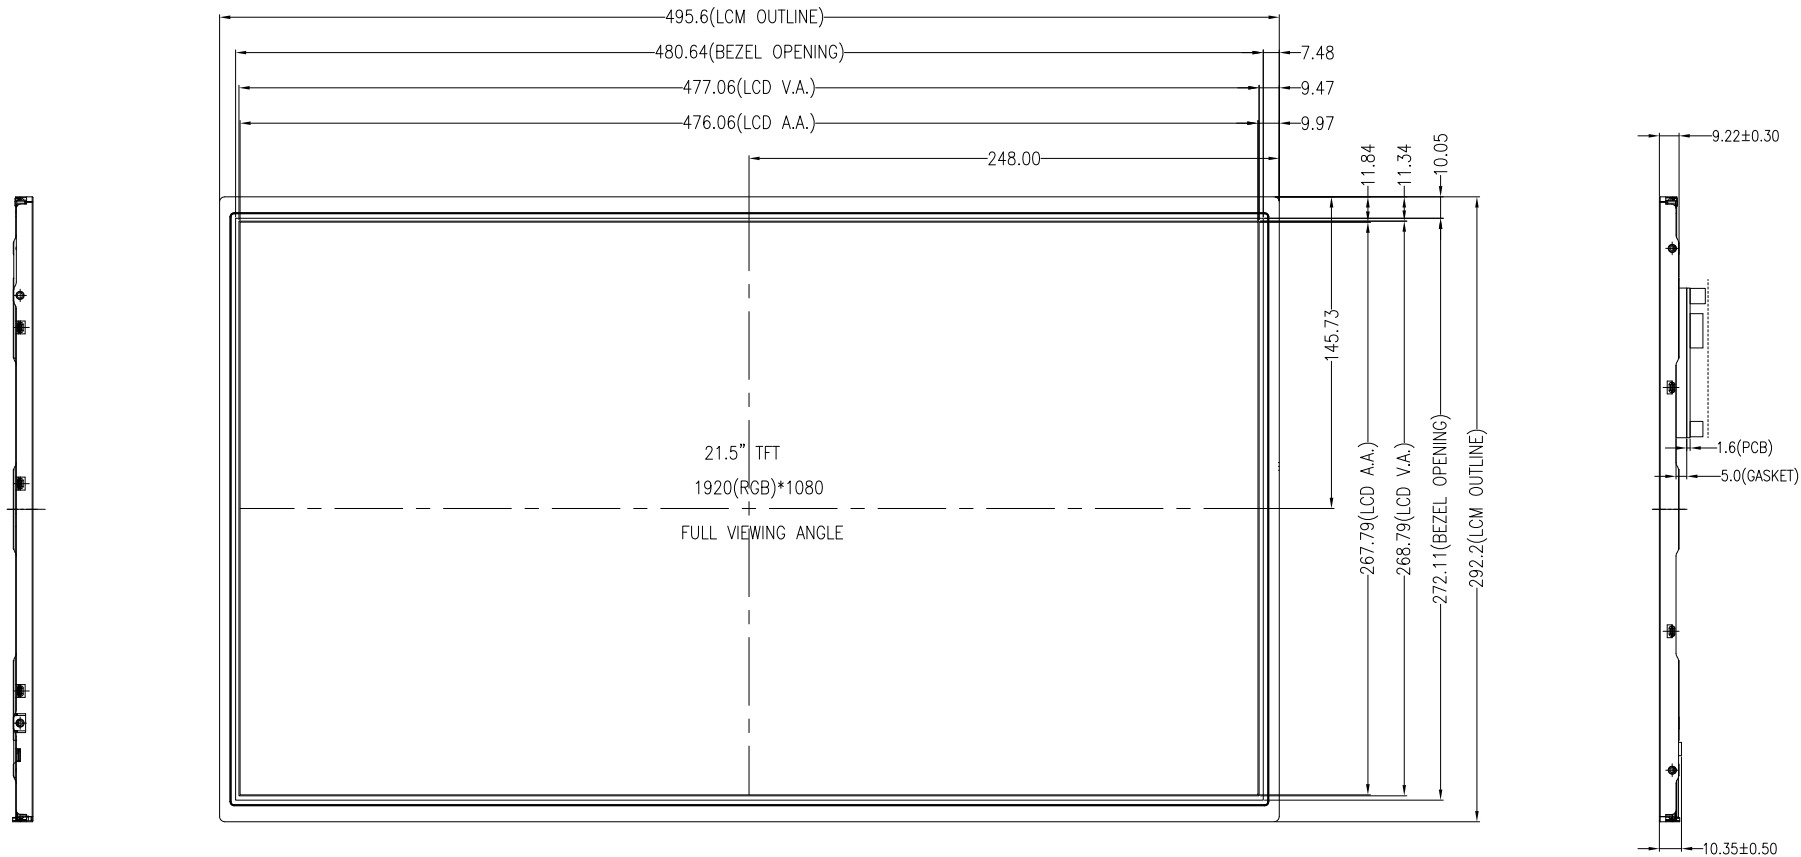

NOTES:

1. DISPLAY TYPE: TFT, TRANSMISSIVE, NORMALLY BLACK
2. OPERATING VOLTAGE: VDD=5.0V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. OPERATING TEMP.: 0°C ~ 50°C
5. STORAGE TEMP.: -20°C ~ 60°C
6. BACKLIGHT TYPE: WHITE LED
BUILT-IN BACKLIGHT DRIVER: VLED12V
7. SURFACE LUMINANCE: 500CD/M² (TYP.)
8. TOP POLARIZER SURFACE TREATMENT: ANTI-GLARE
9. LED CONSTANT CURRENT BOARD IS PACKED SEPARATELY
CUSTOMERS NEED TO ASSEMBLE THIS BOARD WITH BACKLIGHT CABLE BY THEMSELVES
10. UNMARKED TOLERANCE: ±0.5MM
11. ROHS COMPLIANT




PIXEL DETAIL
(SCALE 100:1)



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL		MODULE P/N:
CHECKED BY:		SCALE : 1/1	M12150FT-1-A-B
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 1/2	TFT + PCBA MODULE

01	FIRST ISSUE	CAROL	2025.02.19
VER.	REVISED DESCRIPTION	REVISER	DATE

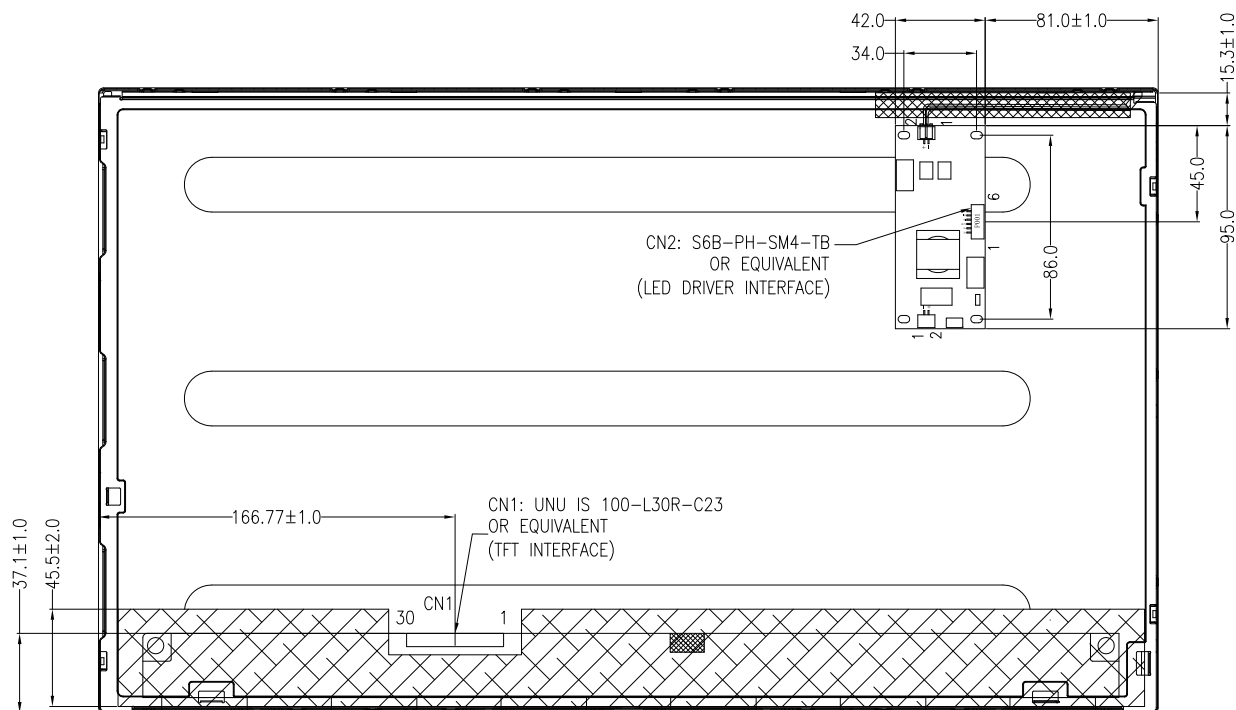

PIN ASSIGNMENT FOR CN1	
PIN	SYMBOL
1	RX00-
2	RX00+
3	RX01-
4	RX01+
5	RX02-
6	RX02+
7	BIST
8	RX0C-
9	RX0C+
10	RX03-
11	RX03+
12	RXE0-
13	RXE0+
14	GND
15	RXE1-
16	RXE1+
17	GND
18	RXE2-
19	RXE2+
20	RXEC-
21	RXEC+
22	RXE3-
23	RXE3+
24	GND
25	CTL
26	CE
27	NC
28	VDD
29	VDD
30	VDD

PIN ASSIGNMENT FOR CN2	
PIN	SYMBOL
1	VLED
2	VLED
3	ON/OFF
4	DIM
5	VSS
6	VSS



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	CAROL		MODULE P/N:
CHECKED BY:		SCALE : 1/1	M12150FT-1-A-B
APPROVED BY:		UNIT: mm	DESCRIPTION:
VERSION NO:	01	SHEET NO.: 2/2	TFT + PCBA MODULE

01	FIRST ISSUE	CAROL	2025.02.19
VER.	REVISED DESCRIPTION	REVISER	DATE