



环保标准

C类环保要求(等同ROHS标准)

PIN DESCRIPTION

1	NC	16	BS0
2	VSS	17	BS1
3	VCC	18	DC#
4	VCOMH	19	CS#
5	VLSS	20	RES#
6	D7	21	FR
7	D6	22	IREF
8	D5	23	NC
9	D4	24	VDDIO
10	D3	25	VDD
11	D2	26	VCI
12	D1	27	VSL
13	D0	28	VLSS
14	E	29	VCC
15	R/W#	30	NC

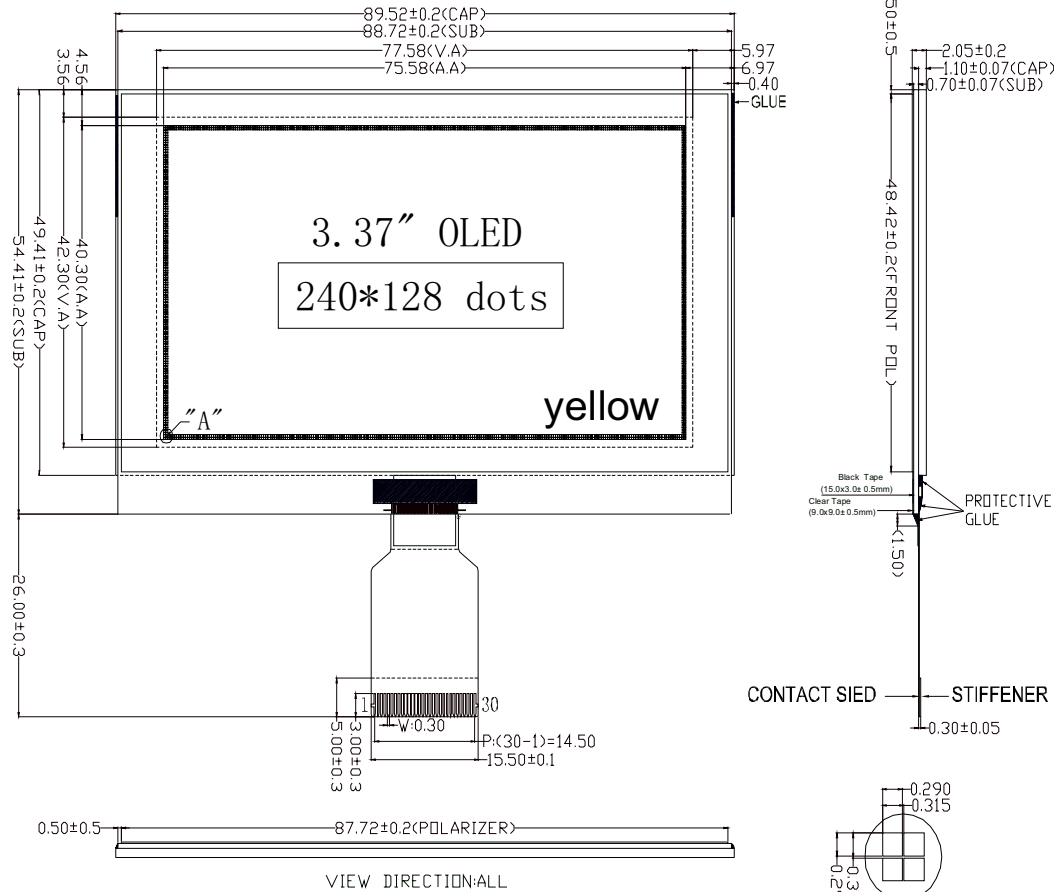

NOTES:

1. OPERATING TEMP: -30°C TO 80°C
2. STORAGE TEMP: -40°C TO 85°C
3. VIEWING DIRECTION: ALL
4. OLED DRIVE IC: SSD1322Z2
5. DISPLAY COLOR: YELLOW
6. UNSPECIFIED TOLERANCES: ±0.2mm.
7. ( ) MEANS: DIMENSION FOR REFERENCE
8. THE PROTECTIVE FILM ON FRONT SIDE OF OLED MUST BE REMOVED BEFORE ASSEMBLY BY CUSTOMER (客户在装机时, 自己必须撕掉保护膜)

CUSTOMER APVL	CUSTOMER	DATE	
DRAWN	SCALE	TITLE	
DFTG CHK	UNIT	MI240128AO-Y	
ENGR CHK	mm	MODEL	
APPROVAL		DWG NO	
MULTI-INNO TECHNOLOGY CO.,LTD.		PAGE	1/1