



NO.	SYMBOL
1	ESD_GND
2	VG
3	XV0
4	VO
5	VM
6	VDDA
7	VSS
8	VD1
9	VDDI
10	CSB
11	IF3
12	IF2
13	IF1
14	RSTB
15	/RD(E)
16	D7
17	D6
18	D5
19	D4
20	D3
21	D2
22	D1
23	D0
24	/RW/(R/W)
25	AO(SCL)
26	ESD_GND

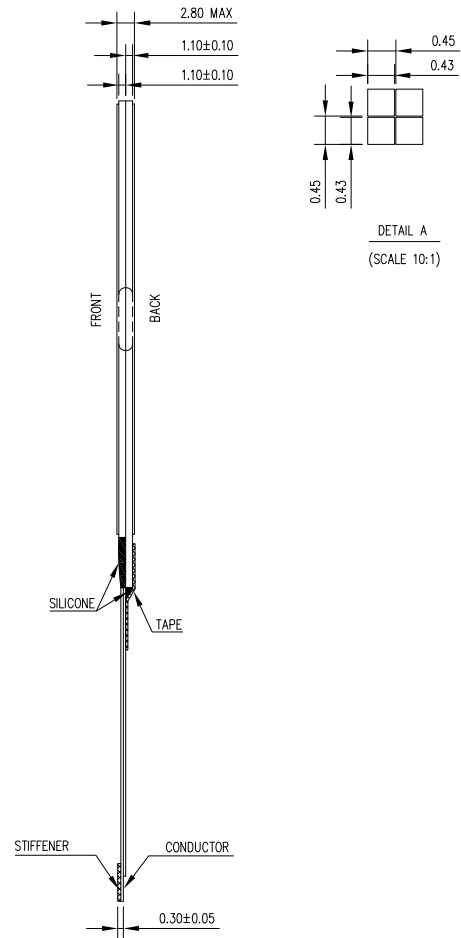

NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLECTIVE, POSITIVE.
2. VIEWING DIRECTION: 6 O'CLOCK.
3. DRIVE METHOD: 1/128 DUTY, 1/12 BIAS.
4. OPERATING VOLTAGE: 3.3V, VLCD=15.0V.
5. IC DRIVER: ST7586S.
6. OPERATING TEMP.: -20°~70°.
7. STORAGE TEMP.: -30°~80°.
8. GENERAL TOLERANCE: ±0.3mm.
9. ROHS COMPLIANT.

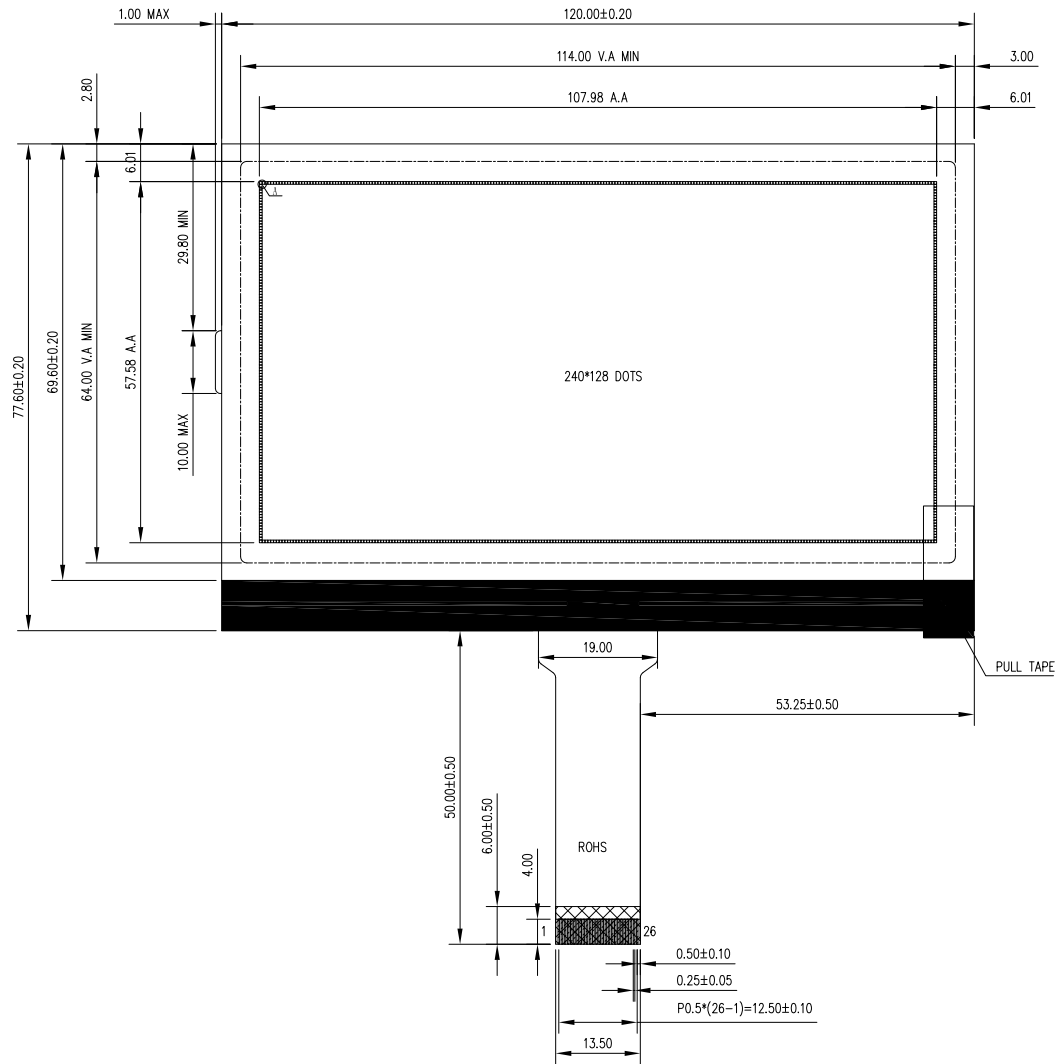

MULTI-INNO TECHNOLOGY CO.,LTD.

DRAWN BY:	RITA	20180703	SCALE : 1/1	MODULE P/N:
CHECKED BY:			UNIT: mm	MI240128N-G
APPROVED BY:				DESCRIPTION:
VERSION NO:	01			GRAPHIC MODULE

01	FIRST ISSUE	RITA	2018.07.03
VER.	REVISED DESCRIPTION	REVISER	DATE