


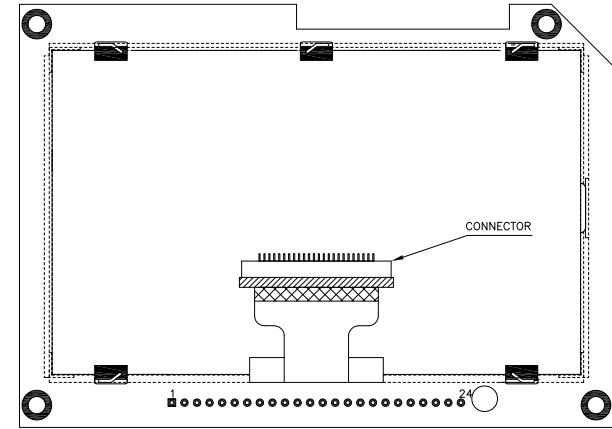
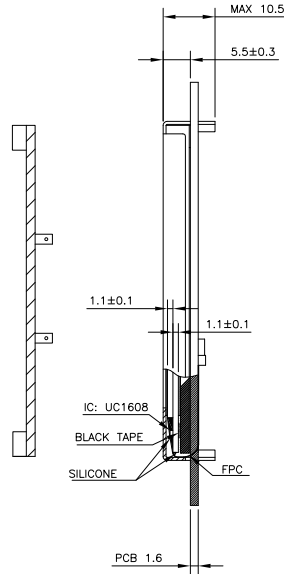


PIN ASSIGNMENT	
NO.	SYMBOL
1	QTCTRL
2	VX
3	GND
4	VDD
5	V0
6	A0
7	RD
8	WR
9	D0
10	D1
11	D2
12	D3
13	D4
14	D5
15	D6
16	D7
17	CS
18	/RESET
19	LED_A
20	LED_K
21	K1
22	R100
23	VS
24	RXDRF

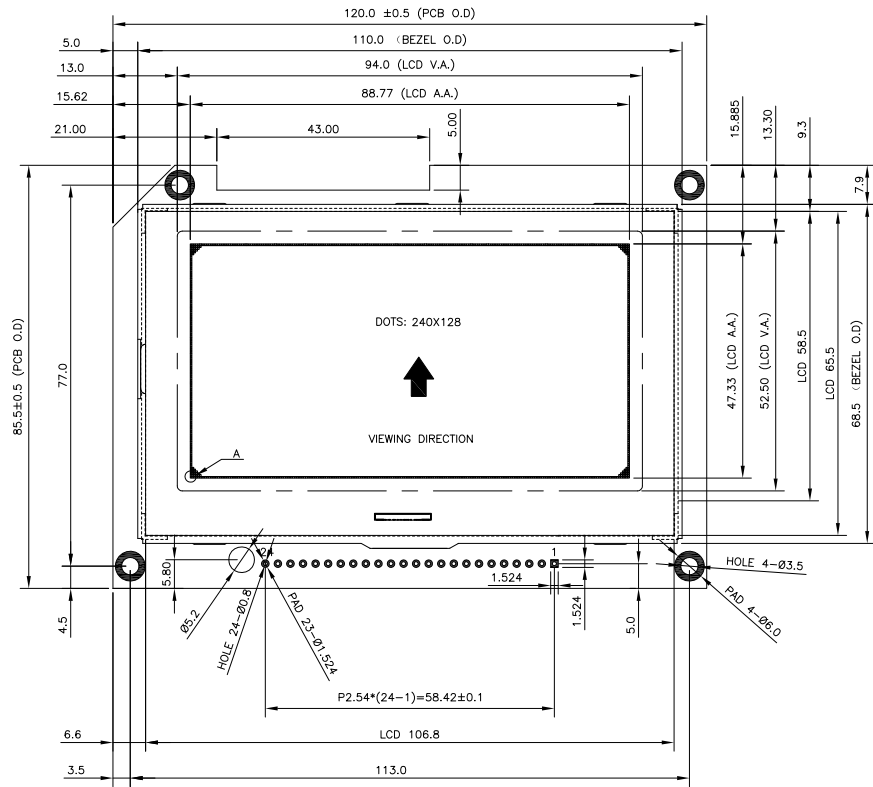

FUNCTION TABLE:



NOTES:

1. DISPLAY TYPE: STN-Y/G, TRANSLLECTIVE, POSITIVE.
2. VIEWING DIRECTION: 6 O'CLOCK.
3. OPERATING VOLTAGE: VDD=3.0V, VLCD=13.5V.
4. LCD DRIVE METHOD: 1/128DUTY, 1/2BIAS.
5. DRIVER IC: UC1608.
6. OPERATING TEMP.: -30°C ~ 80°C.
7. STORAGE TEMP.: -40°C ~ 90°C.
8. BACKLIGHT: 6-CHIPS YELLOW-GREEN LED, IF=11mA, Vf=4.2V.
9. GENERAL TOLERANCE: ±0.3MM.
10. ROHS COMPLIANT.

<b>MULTI-INNO TECHNOLOGY CO.,LTD.</b>			
DRAWN BY:	RITA	20190325	SCALE : 1/1
CHECKED BY:			UNIT: mm
APPROVED BY:			DESCRIPTION: GRAPHIC MODULE
VERSION NO:	01		

VER.	FIRST ISSUE	REVISER	DATE
01		RITA	2019.03.25