


PIN ASSIGNMENT

PIN	SYMBOL
1	FG
2	VSS
3	VDD
4	NC
5	/WR
6	/RD
7	/CE
8	C/D
9	NC
10	/RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	NC

NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLETIVE, POSITIVE
2. OPERATING VOLTAGE: VDD=5.0V, VOP=12.0V
3. DRIVE METHOD: 1/64DUTY, 1/9BIAS
4. VIEWING DIRECTION: 6:00 O'CLOCK
5. DRIVER IC: SAP1024B OR EQUIVALENT
6. OPERATING TEMP: -20°C ~ 75°C
7. STORAGE TEMP: -30°C ~ 85°C
8. BACKLIGHT TYPE: WHITE LED, If=60mA
9. UNMARKED TOLERANCE: ±0.3MM
10. ROHS COMPLIANT

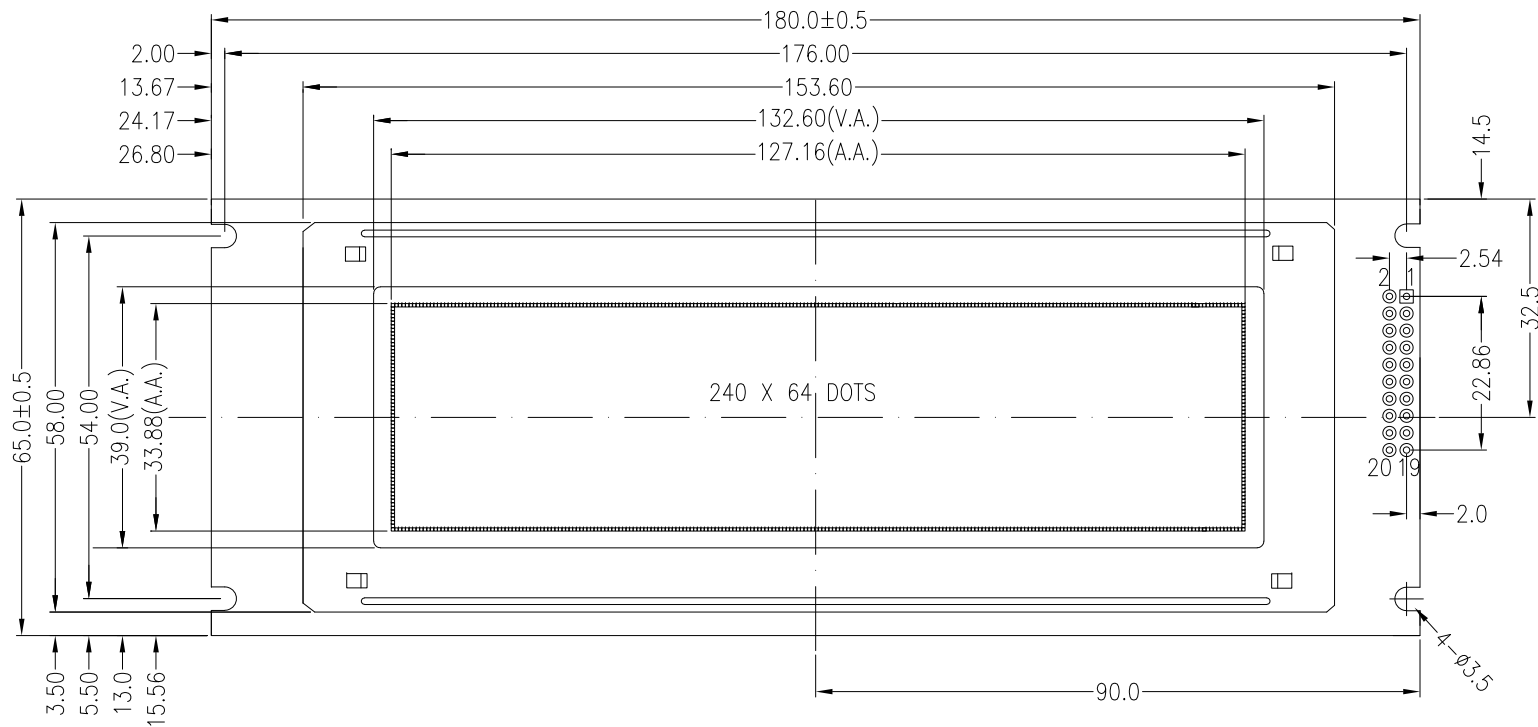

MULTI-INNO TECHNOLOGY CO., LTD.

01	FIRST ISSUE	RITA	2025.05.16	CHECKED BY:	SCALE : 1/1	MODULE P/N:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	UNIT: mm	DESCRIPTION:
				01	SHEET NO: 1/1	GRAPHIC MODULE