



(FPC弯折出货)

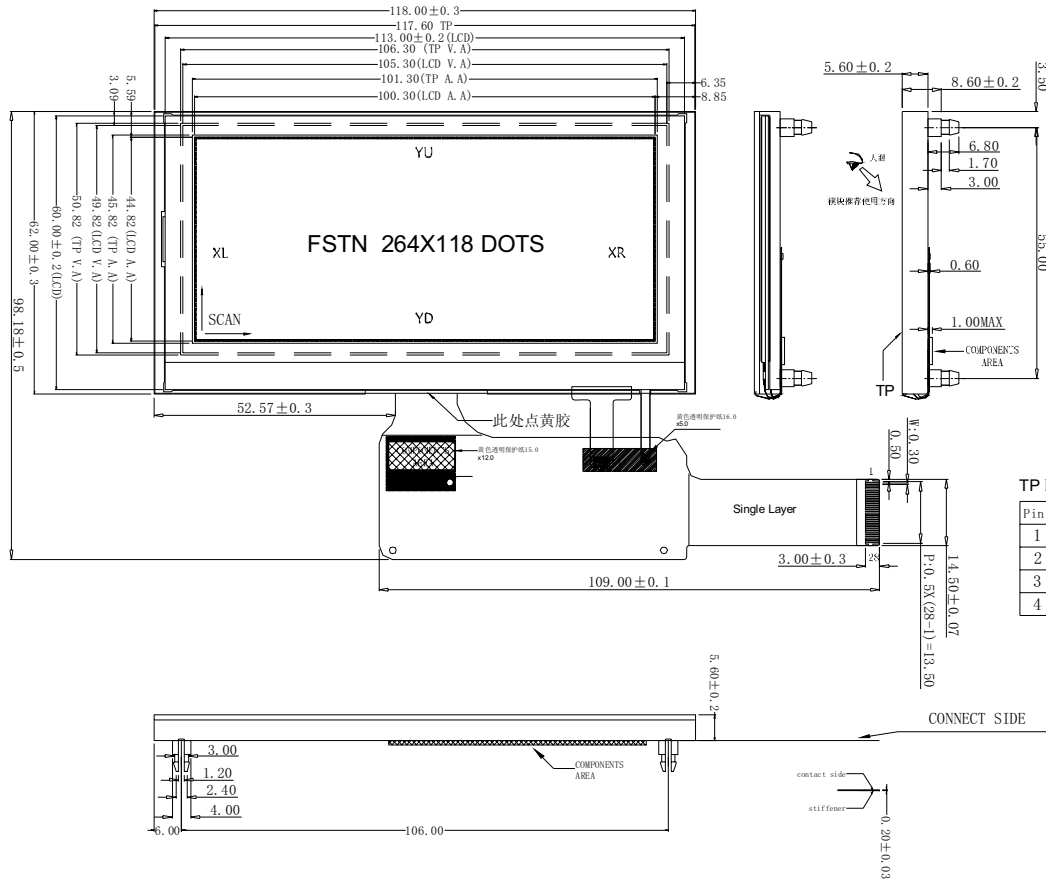


TP Pin DESCRIPTION

| Pin No. | Assignment |
|---------|------------|
| 1 | YU |
| 2 | XR |
| 3 | YD |
| 4 | XL |



DOT DETAIL SCALE 10X



B/L CURCUIT DIAGRAM

FPC DESCRIPTION

| PIN | SYMBOL | PIN | SYMBOL |
|-----|--------|-----|--------|
| 1 | GND | 15 | WR |
| 2 | BM0 | 16 | AO |
| 3 | BM1 | 17 | RST |
| 4 | VSS | 18 | CS1 |
| 5 | VDD | 19 | CS1 |
| 6 | D7 | 20 | NC |
| 7 | D6 | 21 | LED A |
| 8 | D5 | 22 | LED K |
| 9 | D4 | 23 | NC |
| 10 | D3 | 24 | XR |
| 11 | D2 | 25 | YD |
| 12 | D1 | 26 | XL |
| 13 | D0 | 27 | YU |
| 14 | RD | 28 | GND |

NOTES:

- OPERATING TEMPERATURE: -20° C TO 70° C
STORAGE TEMPERATURE: -30° C TO 80° C
- LCD MODEL: FSTN/POSITIVE/TRANSFLECTIVE
- 1/118 DUTY, 1/11 BAIS, VOP=15V, VDD=3.0V
- IC: UC1616CGAA
- VIEWING ANGLE: 12:00 O' CLOCK
- BACKLIGHT: 10PCS 琥珀色 LED(588~596nm); if: 50mA; Vf: 3.8+/-0.5V
- RoHS COMPLIANT

| CUSTOMER APVL | CUSTOMER | DATE | TITLE |
|--------------------------------|----------|-------------|-------|
| DRAWN | SCALE | MI264118A-G | |
| DFTG CHK | UNIT | MODEL | |
| ENGR CHK | mm | DWG NO | |
| APPROVAL | | PAGE | |
| MULTI-INNO TECHNOLOGY CO.,LTD. | | | 1/1 |