

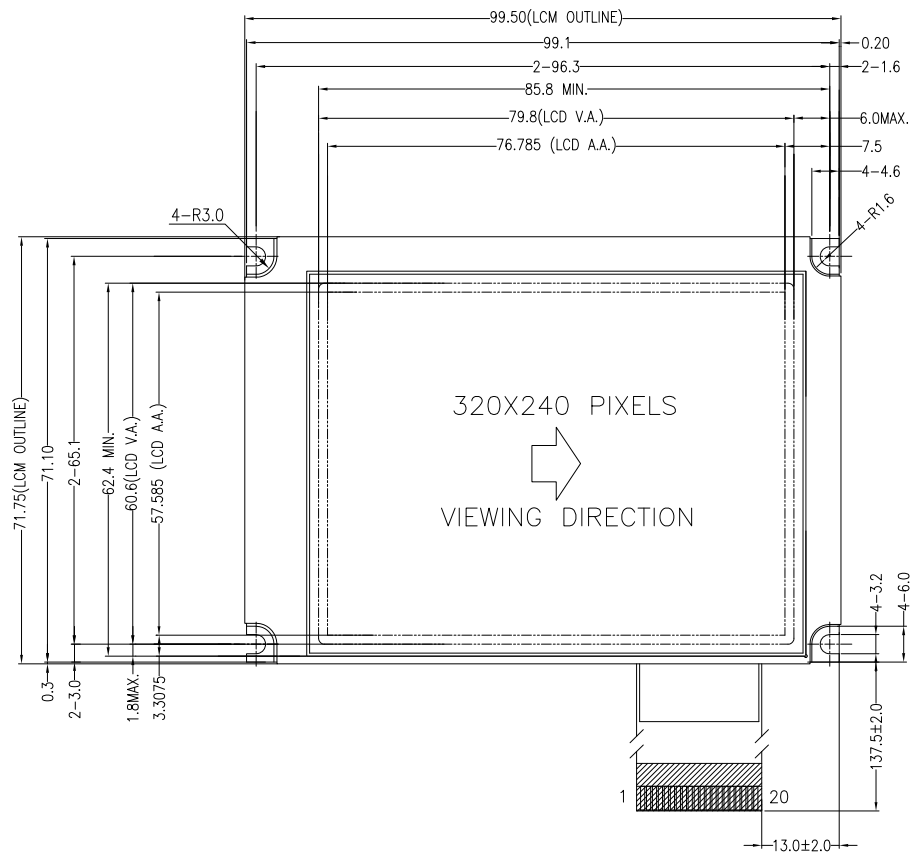



PIXELS DETAILS
(SCALE 20:1)



WIRING DETAILS(TOP VIEW)

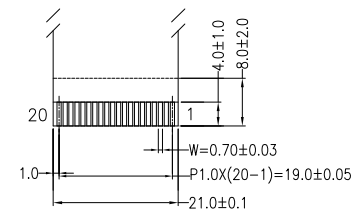

DETAIL A
(SCALE 1:1)



BACKLIGHT CIRCUIT

PIN ASSIGNMENT	
PIN	SYMBOL
1	VSS
2	VDD
3	VO
4	WR
5	RD
6	CS
7	RS
8	RST
9	DB0
10	DB1
11	DB2
12	DB3
13	DB4
14	DB5
15	DB6
16	DB7
17	BUSY
18	VOUT
19	BLA
20	BLK

NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLECTIVE, POSITIVE
2. OPERATING VOLTAGE: VDD=3.3V, VOP=22.5V
3. DRIVE METHOD: 1/240DUTY, 1/16BIAS
4. VIEWING DIRECTION: 6 O'CLOCK
5. DRIVER IC: RA8806
6. OPERATING TEMP.: -20°C ~ 70°C
7. STORAGE TEMP.: -30°C ~ 80°C
8. LED BACKLIGHT: WHITE LED, If=75mA, Vf=2.9V~3.3V
9. ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
10. UNMARKED TOLERANCE: ±0.3MM
11. ROHS COMPLIANT



MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	JERRY	2024.08.11		MODULE P/N:
CHECKED BY:			SCALE : 1/1	MI320240AD-G-1
APPROVED BY:			UNIT: mm	DESCRIPTION:
VERSION NO:	01		SHEET NO.: 1/1	GRAPHIC MODULE

01	FIRST ISSUE	JERRY	2024.08.11
VER.	REVISED DESCRIPTION	REVISER	DATE