
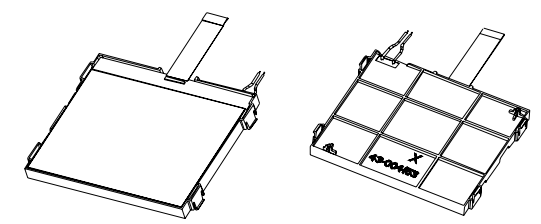




PIN	NAME
1	GND
2	VOUT2
3	RWRDB_SDI
4	RS
5	RESETB
6	EWRB_SCL
7	IM0
8	IM1
9	IM2
10	CSB
11	VCC
12	VPP
13	DB0
14	DB1
15	DB2
16	DB3
17	DB4
18	DB5
19	DB6
20	DB7
21	DB8
22	DB9
23	DB10
24	DB11
25	DB12
26	DB13
27	DB14
28	DB15

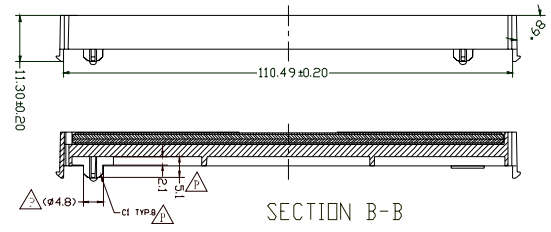

- NOTES:
- DISPLAY TYPE:  
Main LCD: Blue-STN/Negative/Transmissive
  - Controller IC:TR7707
  - OPERATING TEMP: -20°C~70°C
  - STORAGE TEMP : -30°C~80°C
  - DUTY:1/240 BIAS:1/16; VCC:3.0V; Vop:23.0V
  - RECOMMEND CONNECTOR : FD-0520-FRSL(美光电子)
  - BACKLIGHT: SIDE LIGHT, 6LEDs, WHITE
  - ROHS COMPLIANT

CUSTOMER APVL	CUSTOMER	DATE	TITLE
DRAWN	SCALE	MI320240Y-G-2	
DFTG CHK	UNIT	mm	
ENGR CHK	APPROVAL	MODEL	
MULTI-INNO TECHNOLOGY CO.,LTD.			DWG NO
			PAGE
			1/1