

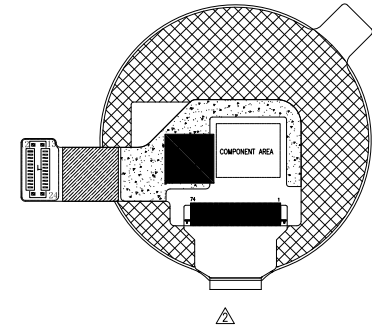
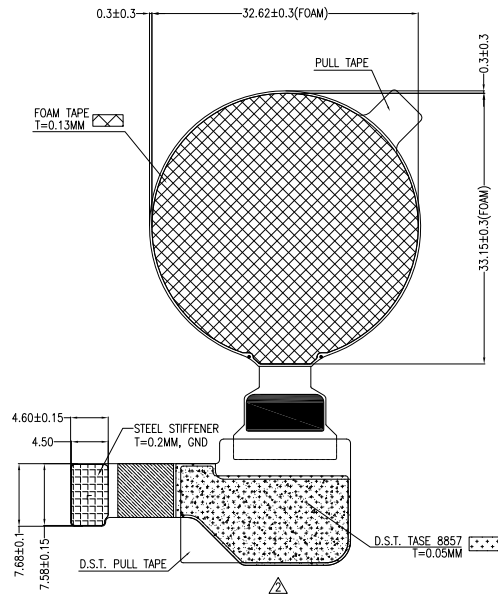


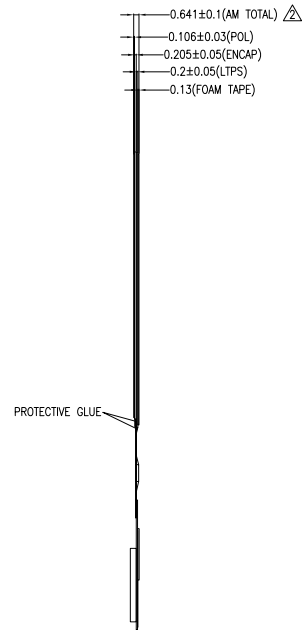

PIN DESCRIPTION	
PIN	SYMBOL
1	CLKP
2	CLKN
3	GND
4	DOP
5	DON
6	GND
7	NC
8	NC
9	NC
10	NC
11	ELVDD
12	ELVDD
13	ELVSS
14	ELVSS
15	RESET
16	TE
17	IOVCC
18	VCC
19	GND
20	SWIRE
21	MTP(NC)
22	L_SENSOR_INT
23	L_SENSOR_SDA
24	L_SENSOR_SCL

NOTES:

1. DISPLAY TYPE: LTPS-AMOLED
2. OPERATING VOLTAGE: VCC=3.3V (TYP.)
3. VIEWING DIRECTION: FULL VIEWING ANGLE
4. LCD DRIVER IC: SH8601Z (CHANNEL SELECT: S1~S90; S151~S240)
5. OPERATING TEMP.: -20°C ~ 70°C
6. STORAGE TEMP.: -30°C ~ 80°C
7. INTERFACE: 1-LANE MIPI
8. SURFACE LUMINANCE: 500CD/M² (TYP.)
9. THE SINGLE LAYER AREA OF FPC IS BENDABLE AND THE BENDING RADIUS MUST BE NOT LESS THAN 1.5MM
10. GENERAL TOLERANCE: ±0.2MM
11. ROHS COMPLIANT

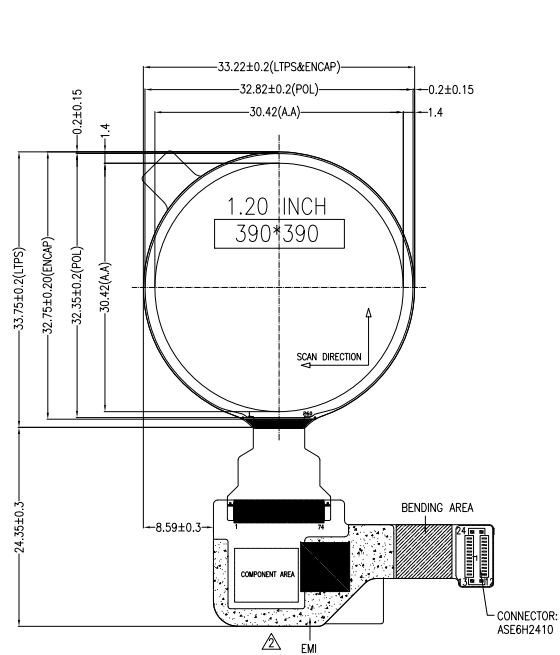

MULTI-INNO TECHNOLOGY CO., LTD.

02	CHANGE FPC, IC, MODULE THICKNESS, INTERFACE AND SURFACE LUMINANCE.	CAROL	2022.07.07	CHECKED BY:	SCALE : 1/1	MODULE P/N:
01	FIRST ISSUE	CAROL	2020.7.18	APPROVED BY:	UNIT: mm	MI390390DO-F
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	SHEET NO.: 1/1	DESCRIPTION:
				02		OLED MODULE