


PIN CONNECTION:

Pin No	1	2	3	4	5	6	7	8	9	10	11	12	13	14	A	K
Signal	VSS	VCC	VEE	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

NOTES:

1. DISPLAY TYPE: STN, YELLOW-GREEN MODE, TRANSFLECTIVE/POSITIVE.
2. DRIVER METHOD: 1/16DUTY,1/5BIAS,VOP=4.2V VDD=5.0V
3. VIEWING DIRECTION: 6 O'CLOCK.
4. DRIVER: KS0066U AND KS0063B OR EQUIVALENT.
5. OPERATING TEMP: -20°C ~ 70°C.
6. STORAGE TEMP: -30°C ~ 80°C.
7. BACKLIGHT TYPE: LED BOTTOM BACKLIGHT, YELLOW-GREEN.LEDA-LEDK=5.0V
8. ALL UNMARKED TOLERANCES: ±0.5.
9. RoHS COMPLIANT

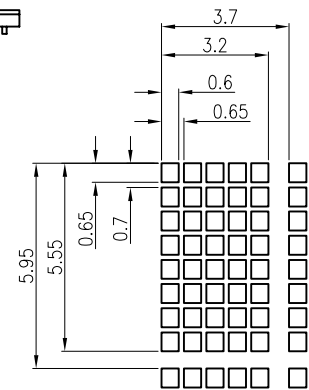

DISPLAY PATTERN

CUSTOMER APVL		DATE	
DRAWN	SCALE	TITLE MODULE	
DFTG CHK	UNIT mm		
ENGR CHK	APPROVAL	MODEL MI4002E	
MULTI-INNO TECHNOLOGY CO.,LTD.		DWG NO 00	PAGE 1/1

VERSION MODIFYCONTENT