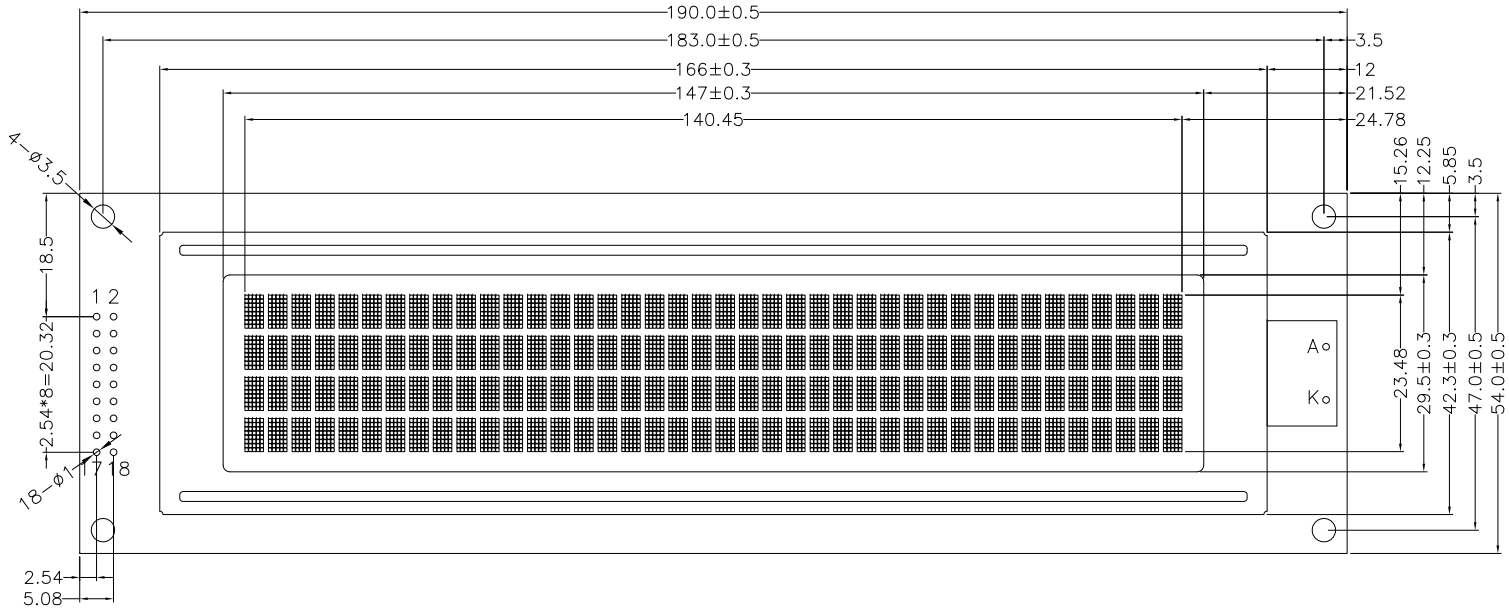

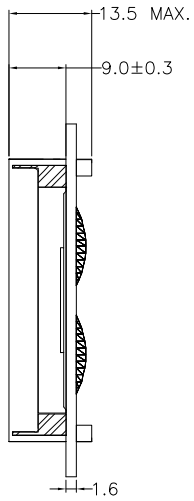

PIN DESCRIPTION	
PIN	SYMBOL
1	DB7
2	DB6
3	DB5
4	DB4
5	DB3
6	DB2
7	DB1
8	DB0
9	E1
10	R/W
11	RS
12	V0
13	VSS
14	VDD
15	E2
16	NC
17	LEDA
18	LEDK



SCALE 5:1

NOTES:

1. DISPLAY TYPE: FSTN, TRANSFLETIVE, POSITIVE
2. OPERATING VOLTAGE: VDD=5.0V
3. VIEWING DIRECTION: 6 O'CLOCK
4. DRIVER IC: –
5. OPERATING TEMP.: –20°C ~ 70°C
6. STORAGE TEMP.: –30°C ~ 80°C
7. LED BACKLIGHT: WHITE LED, If=140mA, Vf=5.0V
8. GENERAL TOLERANCE: ±0.3MM
9. ROHS COMPLIANT

VER.	REVISED DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	RITA	2022.12.22

MULTI-INNO TECHNOLOGY CO., LTD.

DRAWN BY:	RITA 2022.12.22		MODULE P/N: MI4004I
CHECKED BY:		SCALE : 1/1	
APPROVED BY:		UNIT: mm	DESCRIPTION: CHARACTER MODULE
VERSION NO:	01	SHEET NO.: 1/1	