


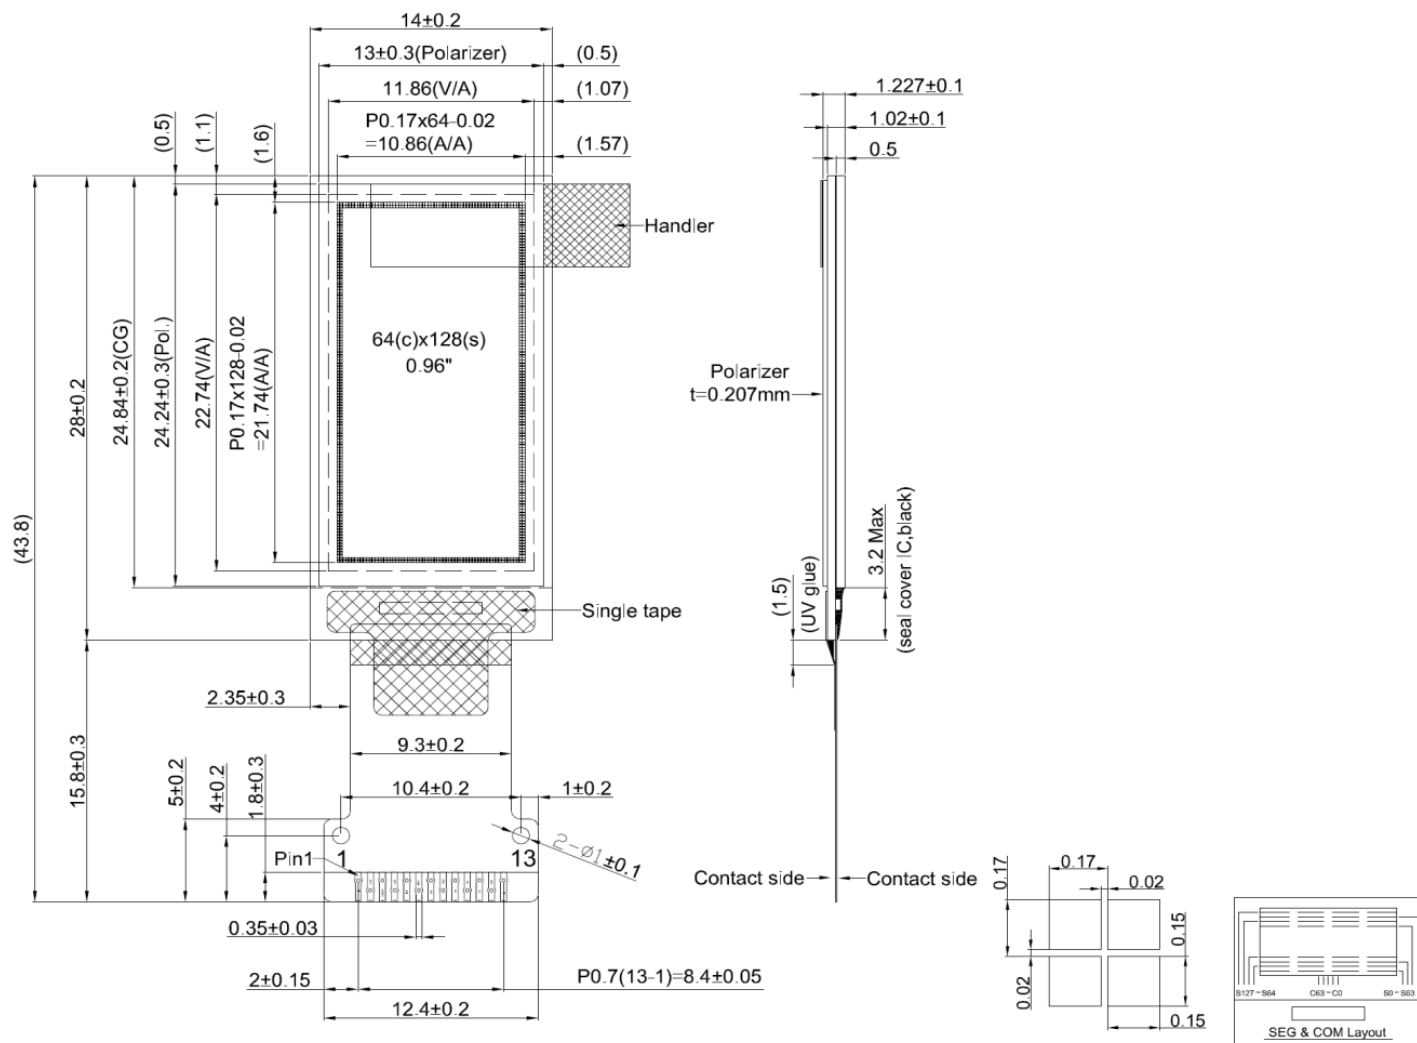

PIN ASSIGNMENT	
PIN	SYMBOL
1	NC
2	VCC
3	VCOMH
4	VDD
5	IM1
6	IREF
7	CS
8	RES
9	DC
10	D0
11	D1
12	VSS
13	NC

NOTES:

- COLOR: WHITE
- OPERATING VOLTAGE: $VDD=1.65V \sim 3.5V$
- DRIVE DUTY: $1/64$
- DRIVER IC: SSD1312Z
- OPERATING TEMP.: $-40^{\circ}\text{C} \sim 70^{\circ}\text{C}$
- STORAGE TEMP.: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$
- INTERFACE: 4-WIRE SPI, IIC
- GENERAL TOLERANCE: $\pm 0.5\text{MM}$
- ROHS COMPLIANT

01	FIRST ISSUE	RITA	2024.03.25	APPROVED BY:		UNIT: mm	DESCRIPTION:
VER.	REVISED DESCRIPTION	REVISER	DATE	VERSION NO:	01	SHEET NO.: 1/1	OLED MODULE

				MULTI-INNO TECHNOLOGY CO., LTD.			
DRAWN BY:	RITA	2024.03.25		MODULE P/N:			
CHECKED BY:			SCALE : 1/1	MI64128G0-W			
APPROVED BY:			UNIT: mm	DESCRIPTION:			
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE			