

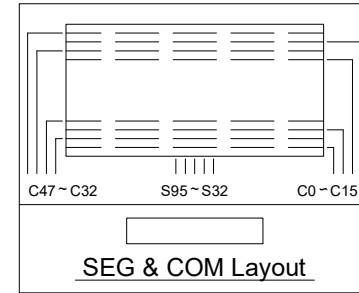
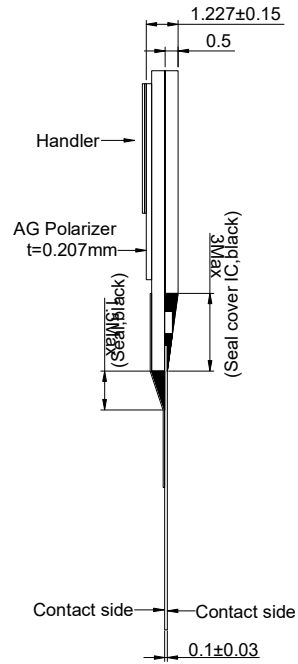


PIN	DESCRIPTION
1	C2P
2	C2N
3	CTP
4	C1N
5	VBAT
6	VBREF(NC)
7	VSS
8	VDD
9	RES
10	SCL
11	SDA
12	IREF
13	VCOMH
14	VCC

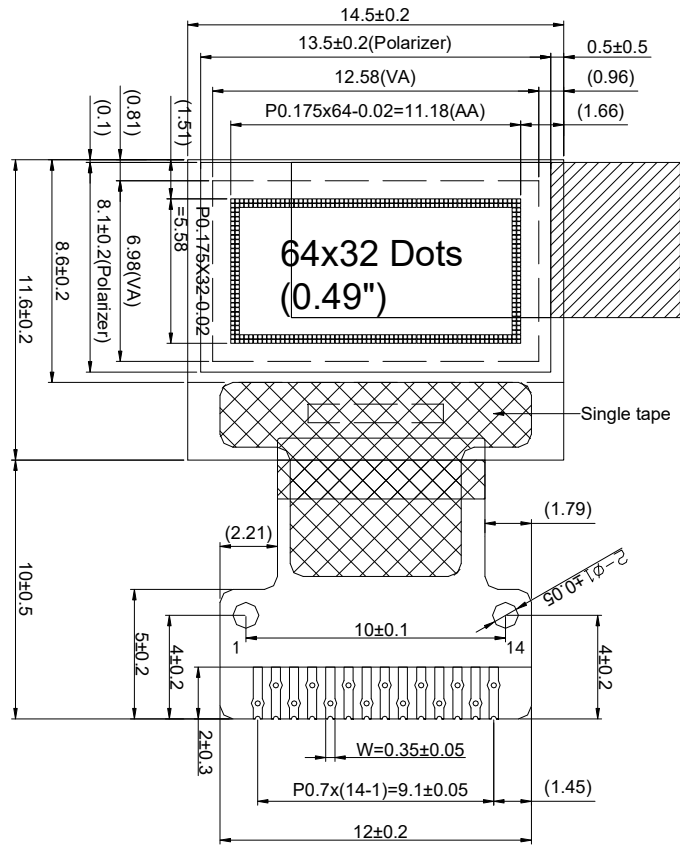

NOTES:

- COLOR: WHITE
- OPERATING VOLTAGE: VCC=7.25V (TYP.)
- DRIVE DUTY: 1/32
- DRIVER IC: SSD1315
- OPERATING TEMP.: -40°C ~ 85°C
- STORAGE TEMP.: -40°C ~ 85°C
- INTERFACE: I<sup>2</sup>C
- ONLY THE SINGLE LAYER AREA ON FPC IS BENDABLE AND THE MINIMUM BEND RADIUS IS 1.5MM
- GENERAL TOLERANCE: ±0.3MM
- ROHS COMPLIANT

MULTI-INNO TECHNOLOGY CO., LTD.					
DRAWN BY:	CAROL	2022.03.25		MODULE P/N:	
CHECKED BY:			SCALE : 1/1	MI6432AO-W3	
APPROVED BY:			UNIT: mm	DESCRIPTION:	
VERSION NO:	01		SHEET NO.: 1/1	OLED MODULE	

VER.	REVISION DESCRIPTION	REVISER	DATE
01	FIRST ISSUE	CAROL	2022.03.25